


TEST REPORT



Applicant	3Dconnexion
Address	7, Boulevard du Jardin Exotique, 98000 Monaco

Manufacturer or Supplier	3Dconnexion	
Address	7, Boulevard du Jardin Exotique, 98000 Monaco	
Product	SpaceMouse Pro Wireless	
Brand Name	3Dconnexion	
Model	3DX-600070	
Additional Model & Model Difference	3DX-600047, 3DX-700049, 3DX-700075, 3DX-700119; see items 2.1	
Date of tests	Apr. 05, 2023 ~ Apr. 25, 2023	

The tests have been carried out according to the requirements of the following standards:

☒ **ARIB STD-T66, Article 2 Section 1 Item 19**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Niko Zhang Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	

Date: Aug. 15, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	5
2 GENERAL INFORMATION.....	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST CHANNELS.....	7
2.3 TEST CONDITIONS	8
2.4 ASSEMBLY	8
2.5 ANTENNA SPECIFICATIONS	8
2.5.1 ANTENNA GAIN	8
2.5.2 ANTENNA PATTERN.....	8
3 TEST TYPES AND RESULTS	9
3.1 FREQUENCY TOLERANCE MEASUREMENT	9
3.1.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT	9
3.1.2 TEST METHOD	9
3.1.3 TEST RESULT	9
3.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH).....	10
3.2.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	10
3.2.2 TEST METHOD	10
3.2.3 TEST RESULT	10
3.3 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT	14
3.3.1 LIMITS OF SPURIOUS EMISSIONS	14
3.3.2 TEST METHOD	14
3.3.3 SUMMARY OF TEST RESULT	15
3.4 ANTENNA POWER MEASUREMENT	26
3.4.1 LIMITS OF ANTENNA POWER.....	26
3.4.2 TEST METHOD	26
3.4.3 TEST SETUP.....	26
3.4.4 TEST PROCEDURE.....	26
3.4.5 TEST RESULT	27
3.5 SPURIOUS EMISSIONS FOR RECEIVER	28
3.5.1 LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER	28
3.5.2 TEST METHOD	28
3.5.3 SUMMARY OF TEST RESULT	28
3.6 INTERFERENCE PREVENTION FUNCTION	32
3.6.1 LIMITS OF INTERFERENCE PREVENTION FUNCTION	32
3.6.2 TEST SETUP.....	32
3.6.3 TEST RESULTS	32
4 TEST INSTRUMENTS	33
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	34
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	35

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RJ2303WDG0221-2	Original release	Aug. 15, 2023



1 SUMMARY OF TEST RESULTS

Article 2 Section 1 Item 19 Reference	ARIB STD-T66 REF.	REPORT REFERENCE	PARAMETER	TEST RESULTS (NOTE)
GENERAL PROVISIONS				
C	3.2 (4)	3.1	Frequency tolerance	C
D	3.2 (7)	3.2	Occupied bandwidth	C
E	3.2 (6)	3.4	Spurious emissions	C
TRANSMITTING EQUIPMENT				
F	--	3.4	Antenna power	C
--	--	--	SAR	NA
TRANSMITTING ANTENNA				
--	--	2.5	Type, configuration, etc. of transmitting antenna	C
--	--	2.5	Direction pattern of transmitting antenna	C
RECEIVING EQUIPMENT				
G	3.3 (1)	3.5	Spurious emissions of receiver	C
--	--	2.5	Refer to all articles for transmitting antenna	C
OPERATING FREQUENCY 2400 TO 2483.5MHZ				
--	3.7 (1)	2.4	High frequency/modulation section cannot be opened easily	C
--	3.1 (1)	2.1	Communication method	C
--	3.2 (1)	2.1	Modulation method	C
--	3.2 (1)	2.1	Spread spectrum method	C
--	3.2 (2)	3.4	Antenna power	C
--	3.6 (2)	3.4	Absolute gain of transmitting antenna	C
--	3.6 (2)	--	Angular width of principal radiation (AWPR)	NA
--	3.2 (10)	--	Number of carriers within 1 MHz bandwidth in OFDM	NA
--	3.2 (8)	--	Diffusion bandwidth	NA
--	3.2 (9)	--	Spreading factor	NA
--	3.4.1(1)	3.6	Interference Prevention Function	C
--	3.2 (11)	--	Frequency retention time (FH employed)	NA
NOTE: C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable				

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

ITEM	UNCERTAINTY
Occupied Bandwidth	206.50 Hz
Spurious emissions	$\pm 3.93\text{dB}$
Output power density	1.37dB
Out of band radiated power	2.52 dB
Frequency Tolerance	0.104 ppm

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	SpaceMouse Pro Wireless
MODEL NO.	3DX-600070
ADDITIONAL MODEL	3DX-600047, 3DX-700049, 3DX-700075, 3DX-700119
POWER SUPPLY:	DC 3.7V from Li-ion Battery or DC 5V from USB Host Unit
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2404MHz ~ 2477MHz
NUMBER OF CHANNEL	5
RATED RF OUTPUT POWER	0.5mW
CONDUCTED RF OUTPUT POWER	0.432 mW
EIRP OUTPUT POWER	0.837 mW
ANTENNA TYPE	PCB Antenna, 2.87dBi Gain
HW-RELEASE NO	PA0.31
SW-RELEASE NO	V5.04
DATA CABLE	USB Line: Unshielded, detachable, 1.5m
I/O PORTS	Refer to user's manual

NOTES:

1. The EUT operates in the 2.4GHz frequency spectrum and complies with GFSK techniques.
2. The above EUT information was declared by the manufacturer and for more detailed features description and please refers to the manufacturer's specifications or User's Manual.
3. Please refer to the EUT photo document (Reference No.: 2303WDG0221-1) for detailed product photo.
4. Additional models (see above table) are identical with the test model 3DX-600070 except the model number, different packaging made according to regional and marketing programs for trading purpose.
5. When the EUT charging that wireless function can't working.
6. For the convenience of trading, this product can be matched Li-ion batteries of different capacities. See the following table for detailed configuration. RF functions are the same in all configurations. Both of these differences have been thoroughly tested at EMC. Therefore, only No. 2 is selected here for RF test.

Sample Configuration No.	Difference	Test item
#1	1100mAh	Full test
#2	2000mAh	

2.2 DESCRIPTION OF TEST CHANNELS

5 channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2404	1	2425	2	2442	3	2463
4	2477						

- NOTE:**
1. Data rate 1 Mbps with GFSK technique.
 2. The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore only the data of the test channels were recorded in this report.

By means of test software provided by manufacture, the power levels during the tests were set according to the following codes:

Channel	Power setting
0	Default
2	Default
4	Default

2.3 TEST CONDITIONS

Test conditions	Voltage (Vdc)
V_{normal}	3.70
V_{max}	4.07
V_{min}	3.33

Note: After checking the fluctuation of input voltage to the circuit of the radio part (excluding the power supply) of the equipment to be tested, the fluctuation less than +/- 1 % when input voltage from an external supply into the equipment fluctuates +/- 10%, therefore, the test is carried out only at the normal voltage.

2.4 ASSEMBLY

The RF circuits are located inside of the EUT. Also it won't be easy to be opened. Frequency Band, channels and modulation parameters are fixed inside the module. They cannot be edited or modified by end-user. Separating the two parts was only possible by special tools.

2.5 ANTENNA SPECIFICATIONS

2.5.1 ANTENNA GAIN

Antenna type	Max. Gain (dBi)
PCB antenna	2.87

2.5.2 ANTENNA PATTERN

Please refer to the attached file (Antenna pattern).

3 TEST TYPES AND RESULTS

3.1 FREQUENCY TOLERANCE MEASUREMENT

3.1.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT

Tolerance of frequency shall be +/- 50ppm

3.1.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43

3.1.3 TEST RESULT

ENVIRONMENTAL CONDITIONS		23 deg.C, 56 % RH					
Channel	Frequency (MHz)	Voltage <small>normal</small>		Voltage <small>+10%</small>		Voltage <small>-10%</small>	
		Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)
0	2403	2403.057900	24.095	2403.057700	24.012	2403.057300	23.845
2	2442	2442.058800	24.078	2442.058919	24.127	2442.058800	24.078
4	2477	2477.059799	24.141	2477.059640	24.077	2477.059719	24.109

3.2 OCCUPIED BANDWIDTH MEASUREMENT (99% POWER BANDWIDTH)

3.2.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

Occupied bandwidth shall be 26MHz or less.

3.2.2 TEST METHOD


According to MIC Notice No. 88 Appendix 43.

3.2.3 TEST RESULT


ENVIRONMENTAL CONDITIONS		23 deg.C, 56 % RH		
Channel	Frequency (MHz)	Voltage normal	Voltage +10%	Voltage -10%
		Occupied bandwidth (MHz)	Occupied bandwidth (MHz)	Occupied bandwidth (MHz)
0	2404	1.16	1.16	1.17
2	2442	1.17	1.17	1.18
4	2477	1.18	1.18	1.18

NOTE: For the test plots please refer to the below pages.


Vnormal

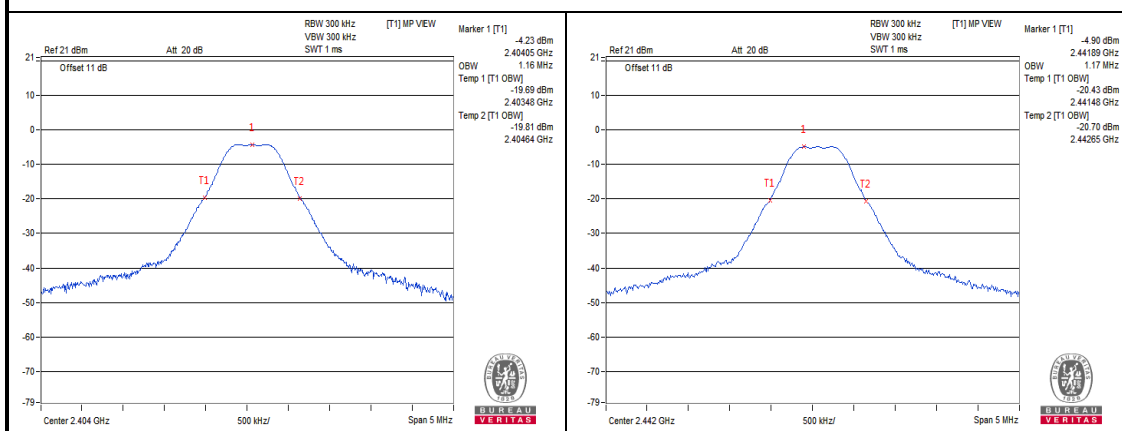

Channel 0

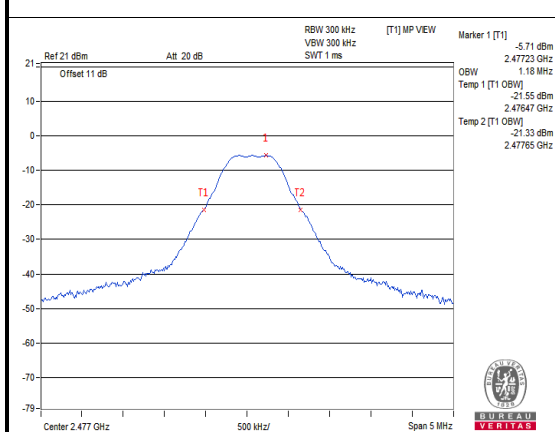



Channel 2



Channel 4

Measurement uncertainty: ± 206.50 Hz

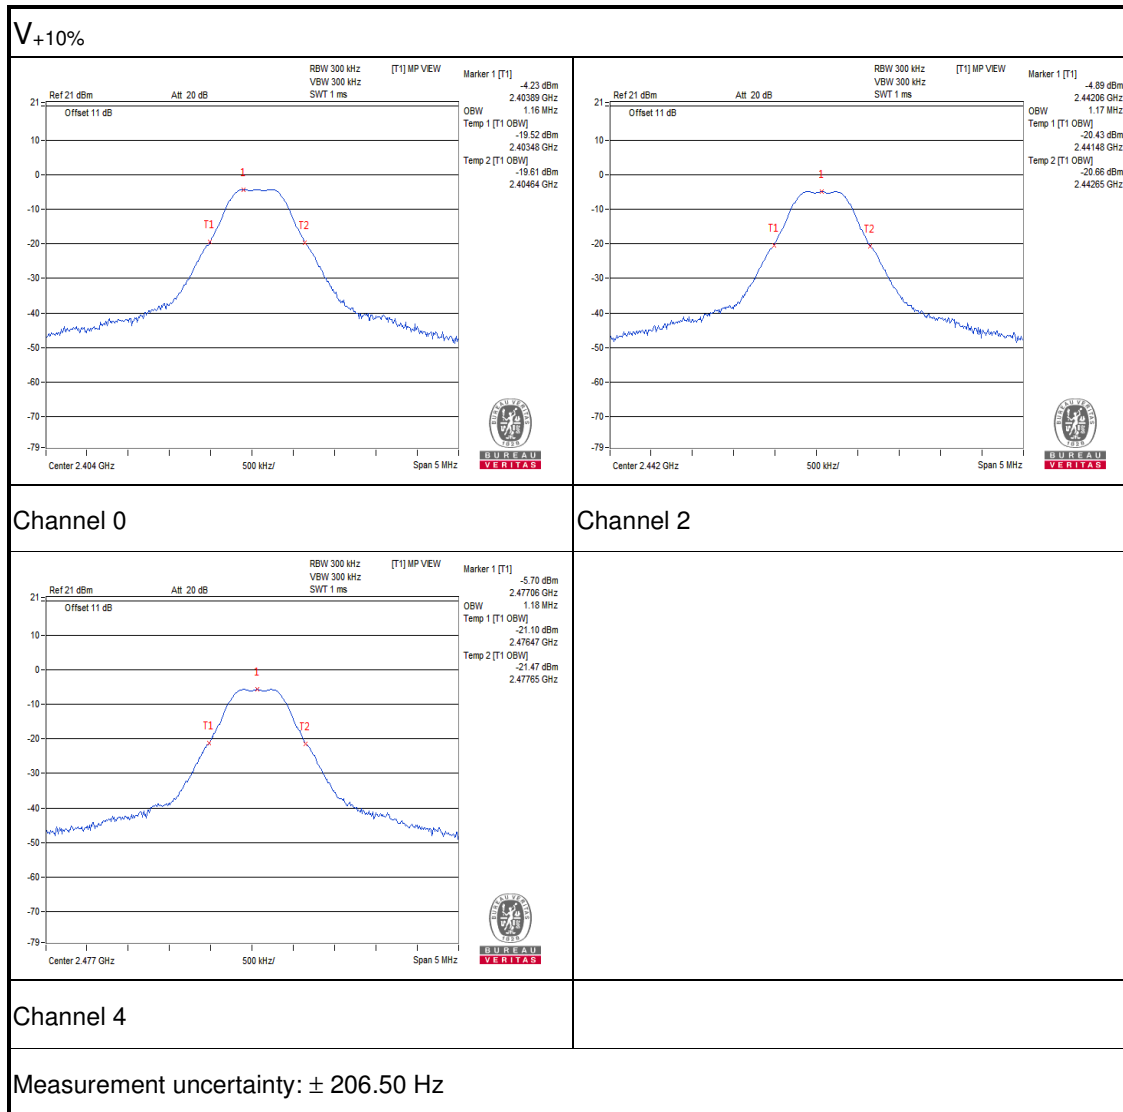

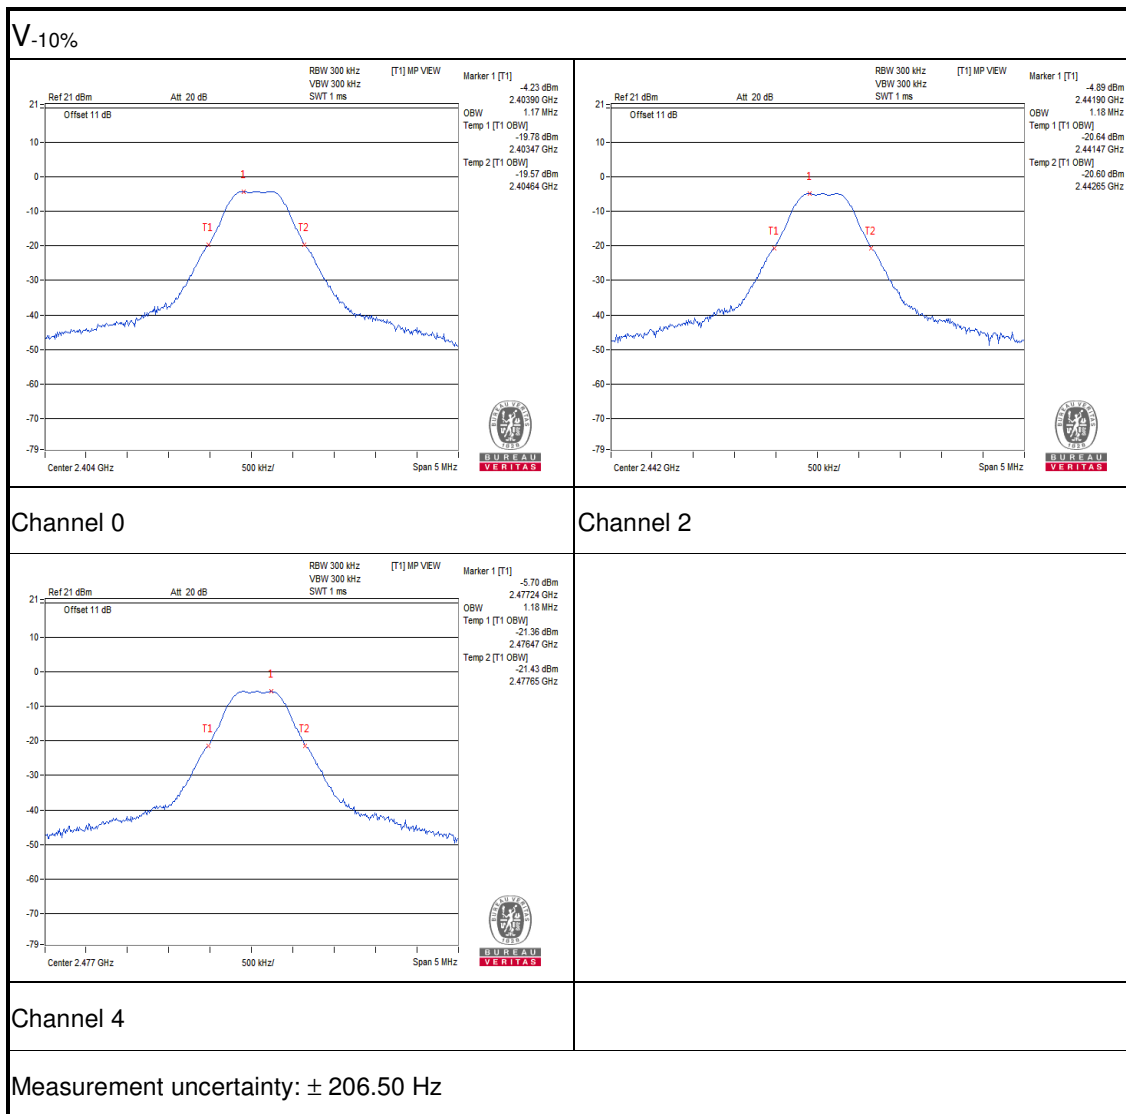



3.3 SPURIOUS EMISSIONS FOR TRANSMITTER MEASUREMENT

3.3.1 LIMITS OF SPURIOUS EMISSIONS

Frequencies (MHz)	Limit
Operating frequency 2400 to 2483.5MHz	
$2387 \leq f < 2400$	$\leq 25\mu\text{W}$
$2483.5 < f \leq 2496.5$	$\leq 25\mu\text{W}$
All other frequencies	$\leq 2.5\mu\text{W}$

3.3.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.3.3 SUMMARY OF TEST RESULT

ENVIRONMENTAL CONDITIONS		23 deg.C, 56 % RH					
TEST CHANNEL		CH 0 (2404MHz)		CH 2 (2442MHz)		LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE	FREQUENCY (MHz)	MEASURE. VALUE		
Vnormal	30.0MHz to 1000.0MHz	561.560	0.001355uW	953.680	0.001393uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2223.330	0.016181uW	2174.090	0.015885uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2399.830	0.054828uW	2390.100	0.01932uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2493.420	0.018408uW	2496.470	0.018365uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6883.030	0.047643uW	6900.540	0.043152uW	2.5uW	PASS
V+10%	30.0MHz to 1000.0MHz	926.760	0.001489uW	946.650	0.001462uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2211.190	0.016596uW	1859.590	0.015031uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2399.900	0.067453uW	2391.490	0.017498uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2490.820	0.019364uW	2495.860	0.018365uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6928.050	0.044978uW	6893.030	0.046132uW	2.5uW	PASS
V-10%	30.0MHz to 1000.0MHz	902.750	0.001403uW	983.260	0.001469uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2117.220	0.018323uW	2086.360	0.015276uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2399.930	0.05445uW	2397.400	0.020701uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2488.900	0.016866uW	2492.690	0.018967uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6805.500	0.038637uW	6890.530	0.047643uW	2.5uW	PASS

TEST CHANNEL		CH 4 (2477MHz)		LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE		
Vnormal	30.0MHz to 1000.0MHz	743.430	0.0016uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2260.780	0.017418uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2393.860	0.017947uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2487.990	0.023442uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6958.060	0.052845uW	2.5uW	PASS
V+10%	30.0MHz to 1000.0MHz	959.980	0.001714uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2078.390	0.014421uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2391.030	0.019099uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2495.810	0.019099uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6948.050	0.047206uW	2.5uW	PASS
V-10%	30.0MHz to 1000.0MHz	963.620	0.001493uW	0.25uW	PASS
	1000.0MHz to 2387MHz	1960.490	0.015776uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2392.270	0.018113uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2490.640	0.01762uW	25uW	PASS
	2496.5MHz to 12500.0MHz	6815.510	0.038194uW	2.5uW	PASS


NOTE: 1. The worst value in each frequency range v.s. each channel has been marked by boldface.
 2. The spectrum plots are attached on the following pages.
 3. The limit 2.5uW/MHz of frequency 30MHz to 1000MHz after conversion is 0.25uW/100kHz.



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

Vnormal Channel 0

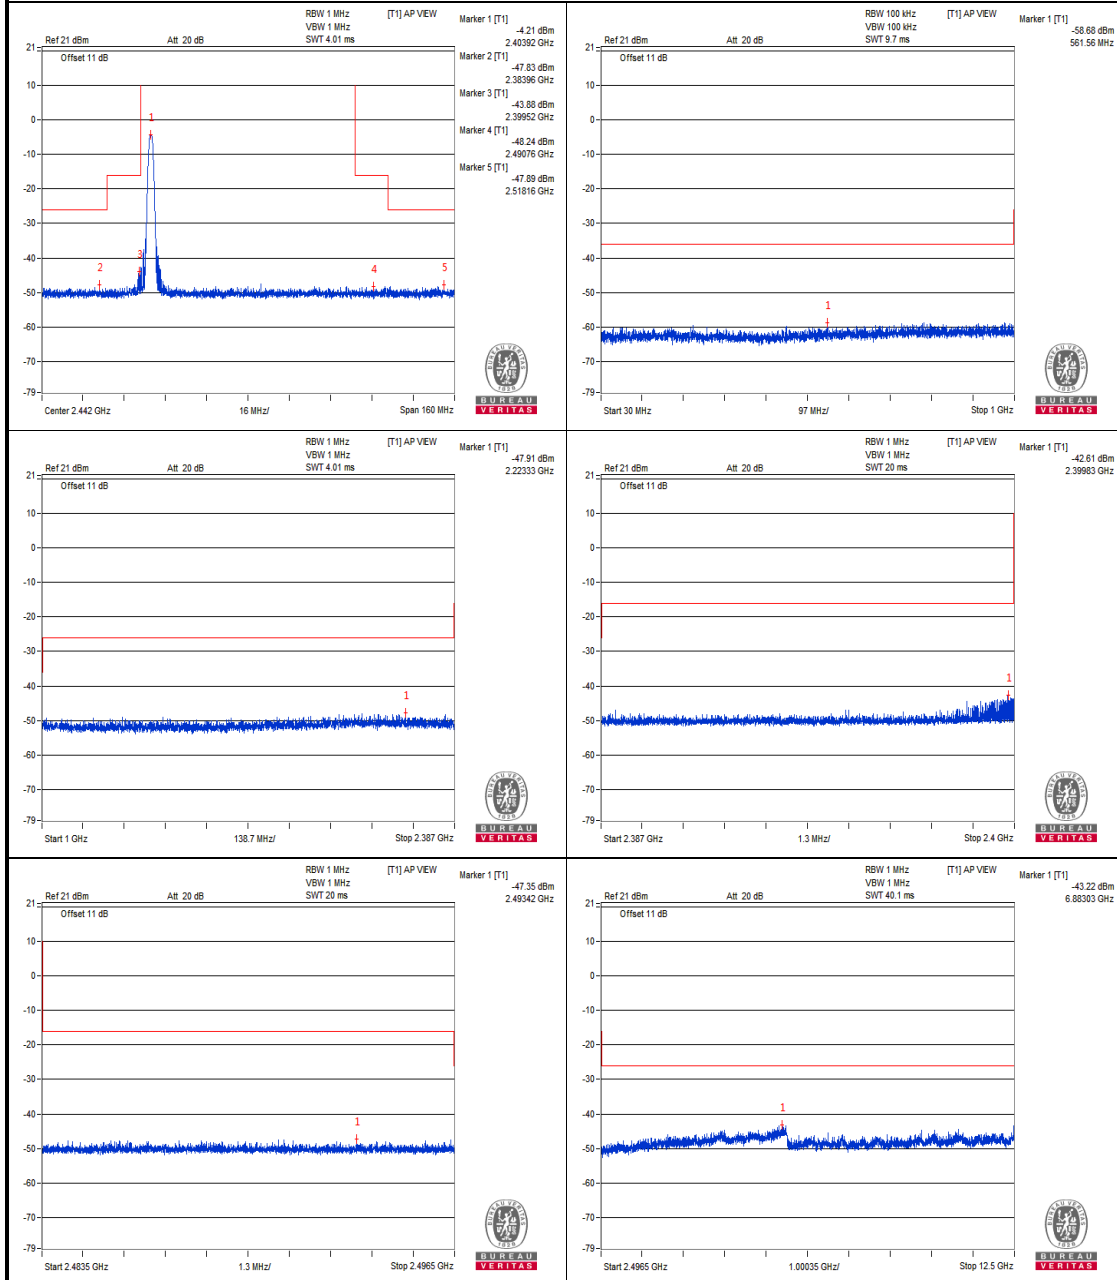


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

Vnormal Channel 2

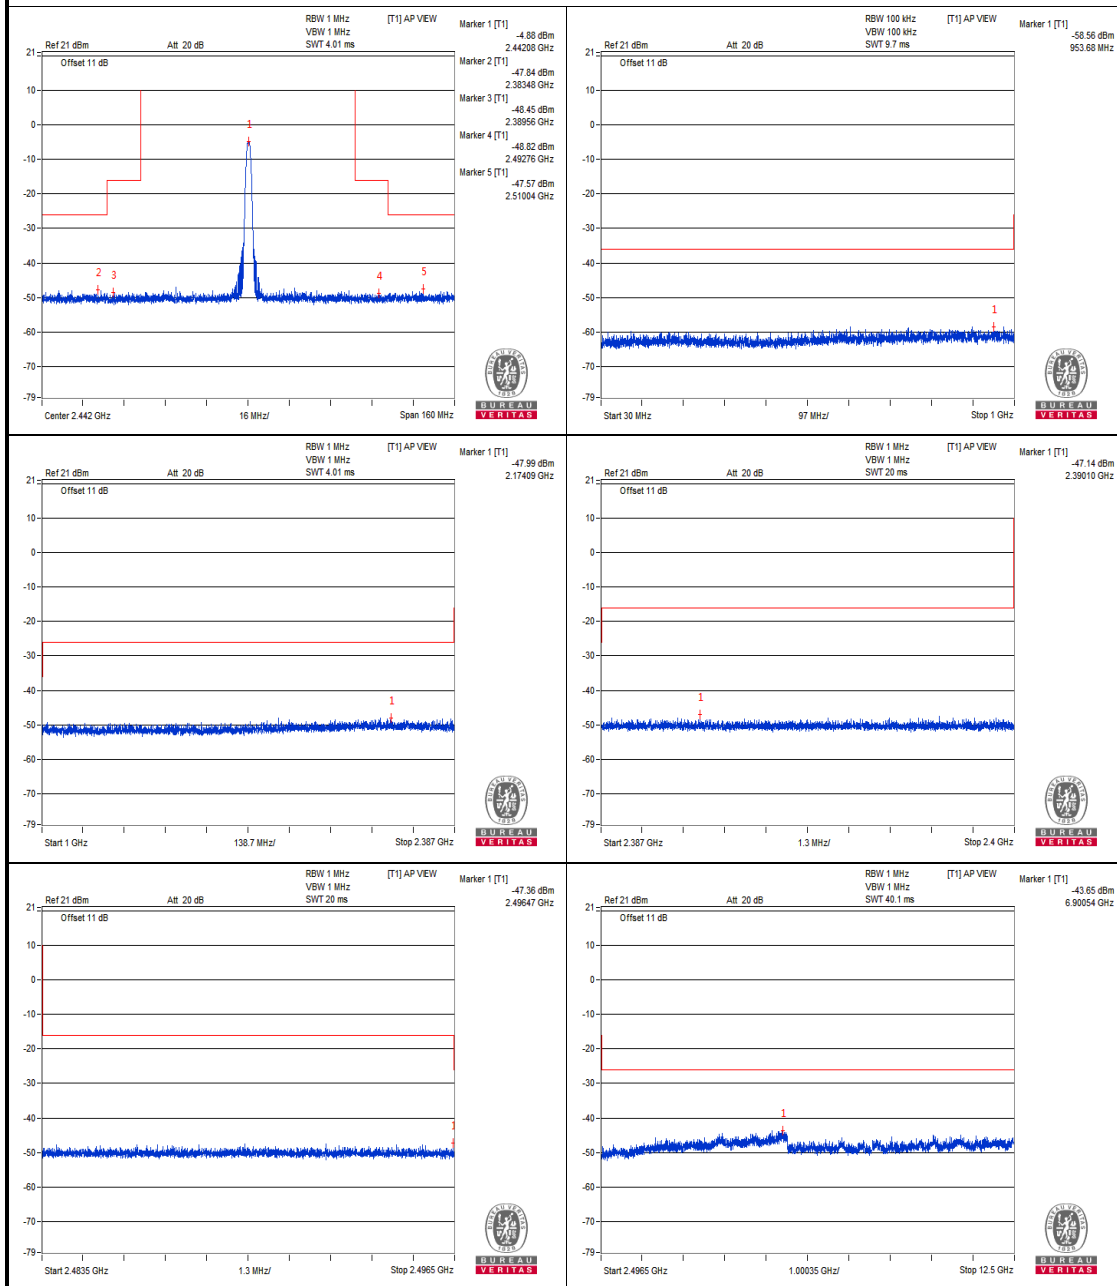


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

Vnormal Channel 4

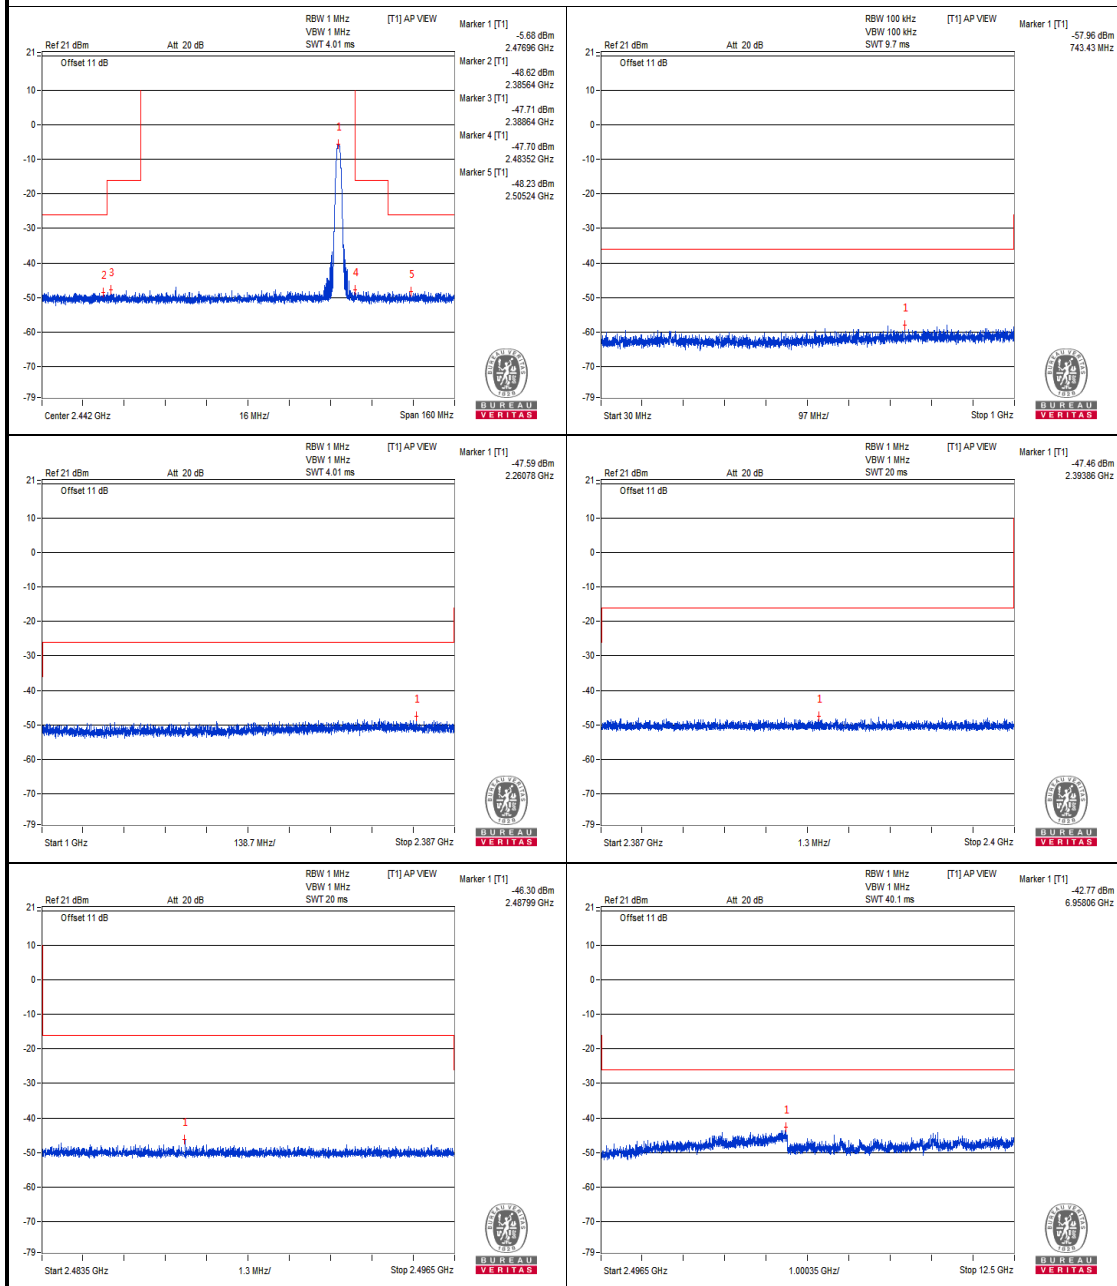


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V+10%
Channel 0

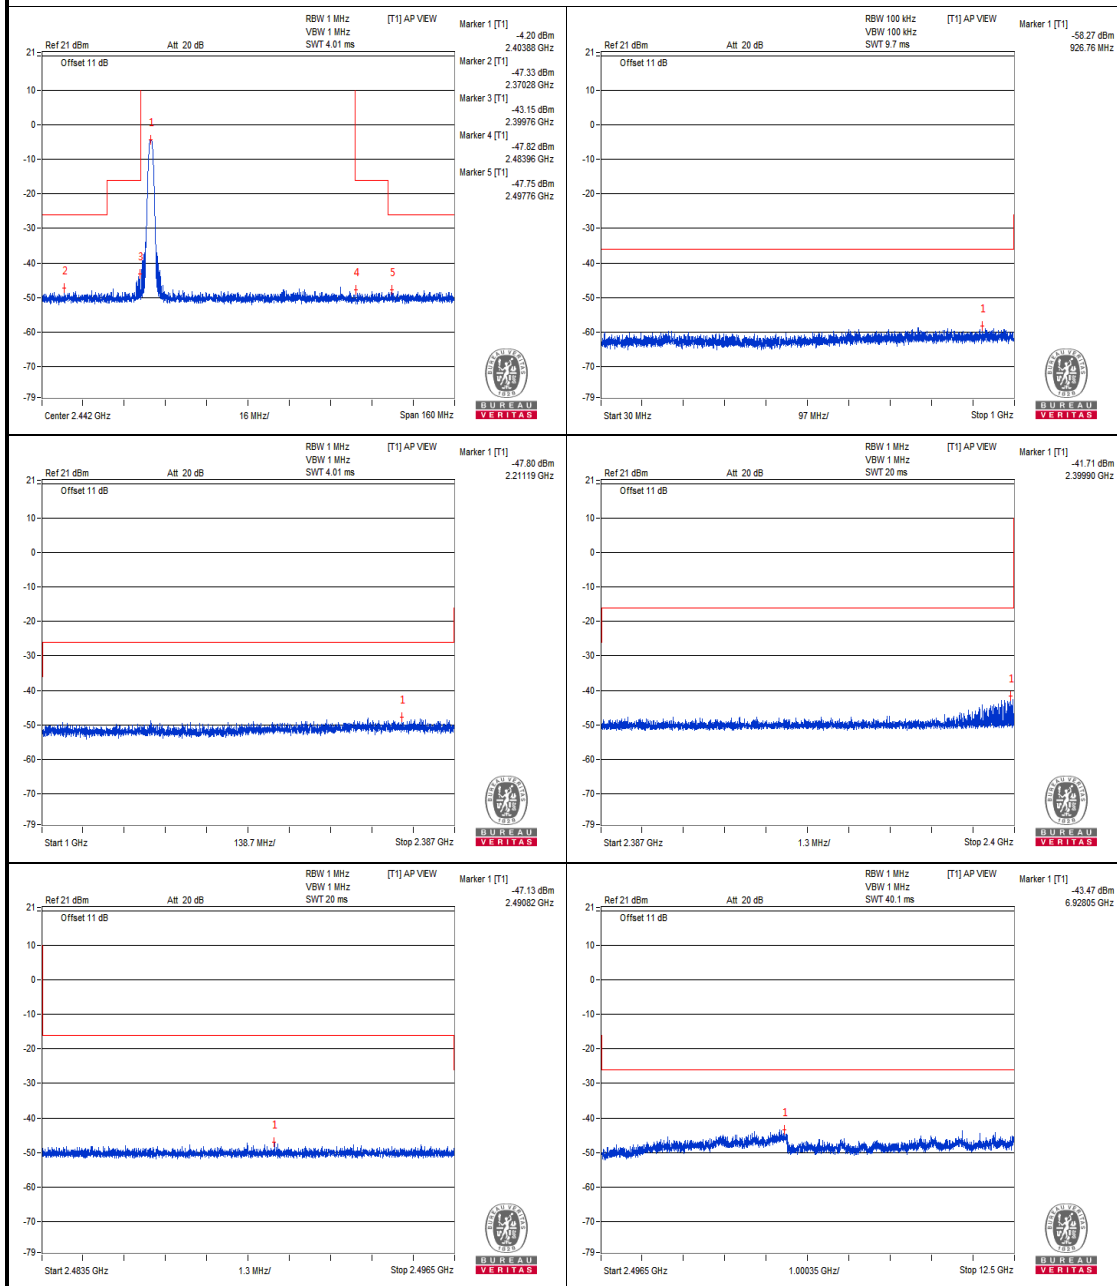


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V+10%
Channel 2

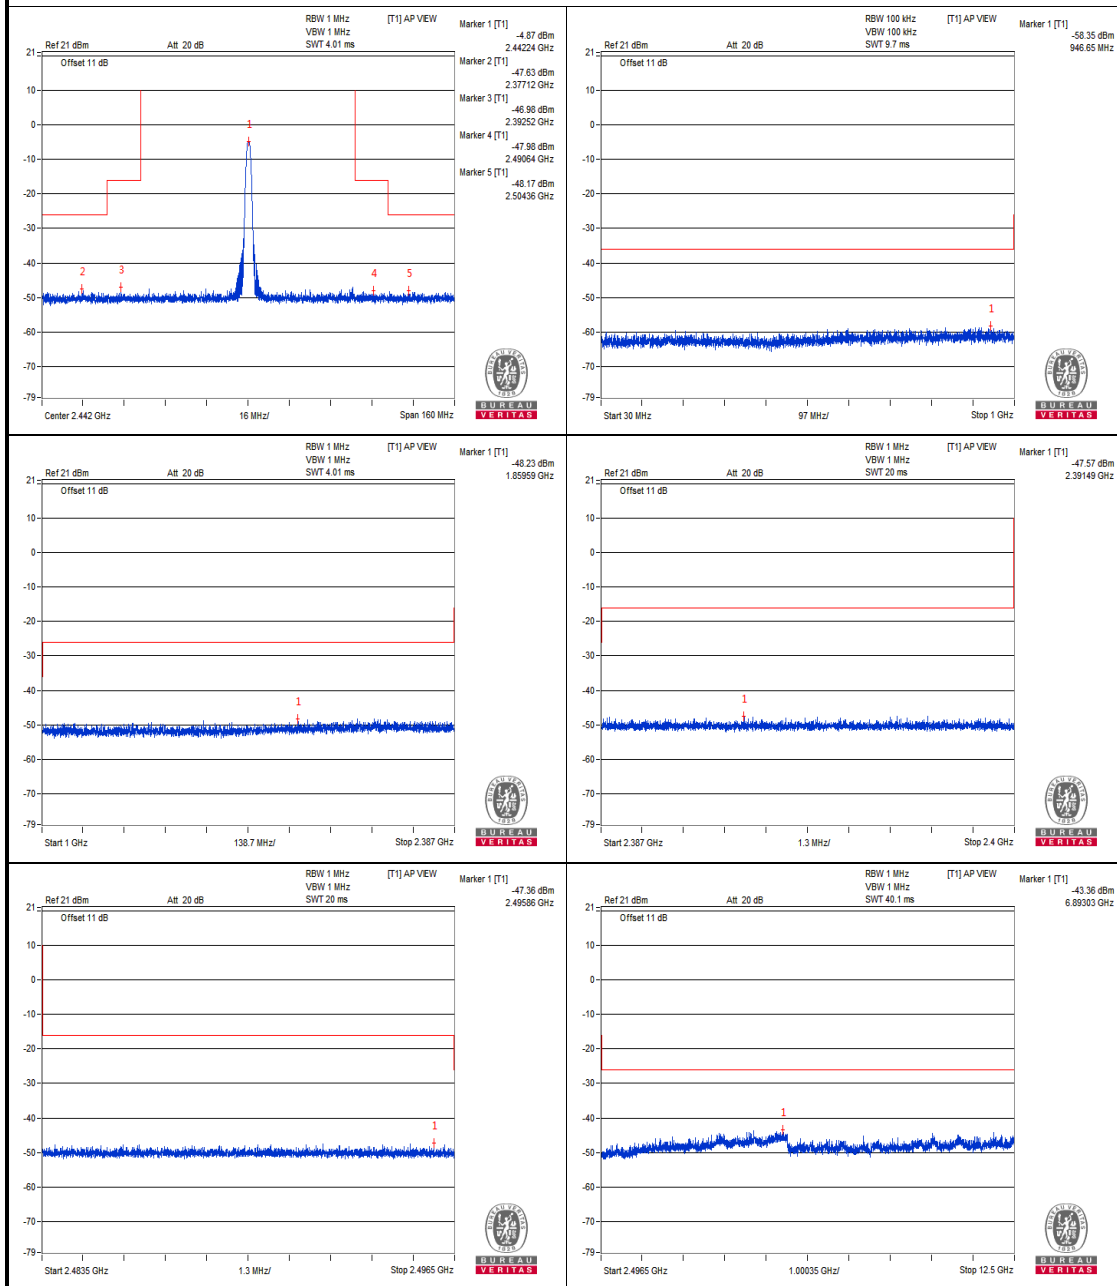


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V+10%
Channel 4

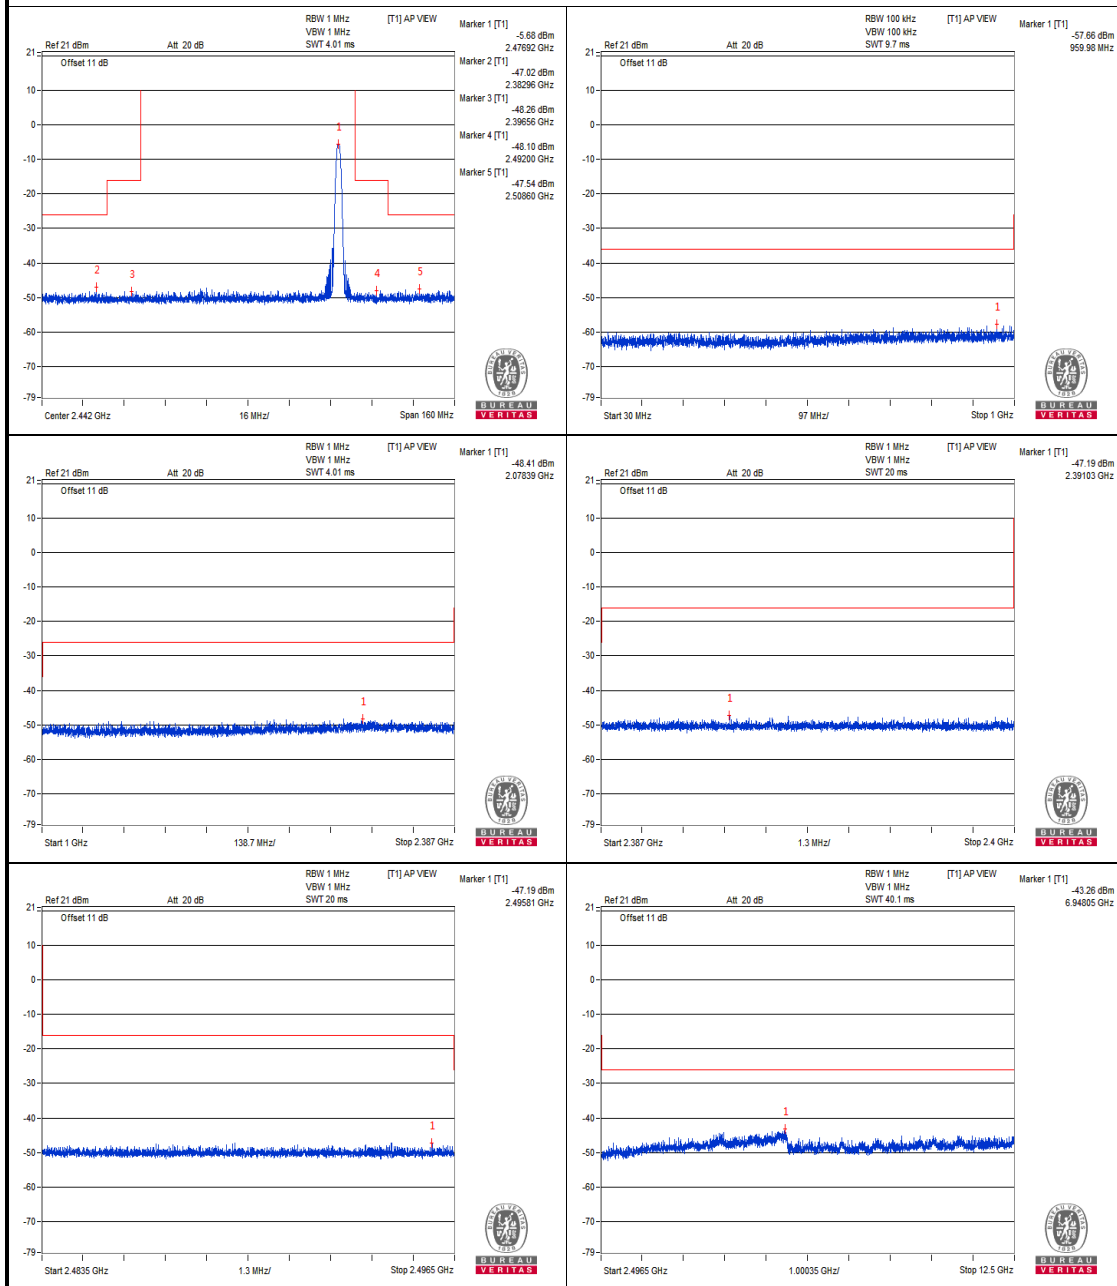


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V-10% Channel 0

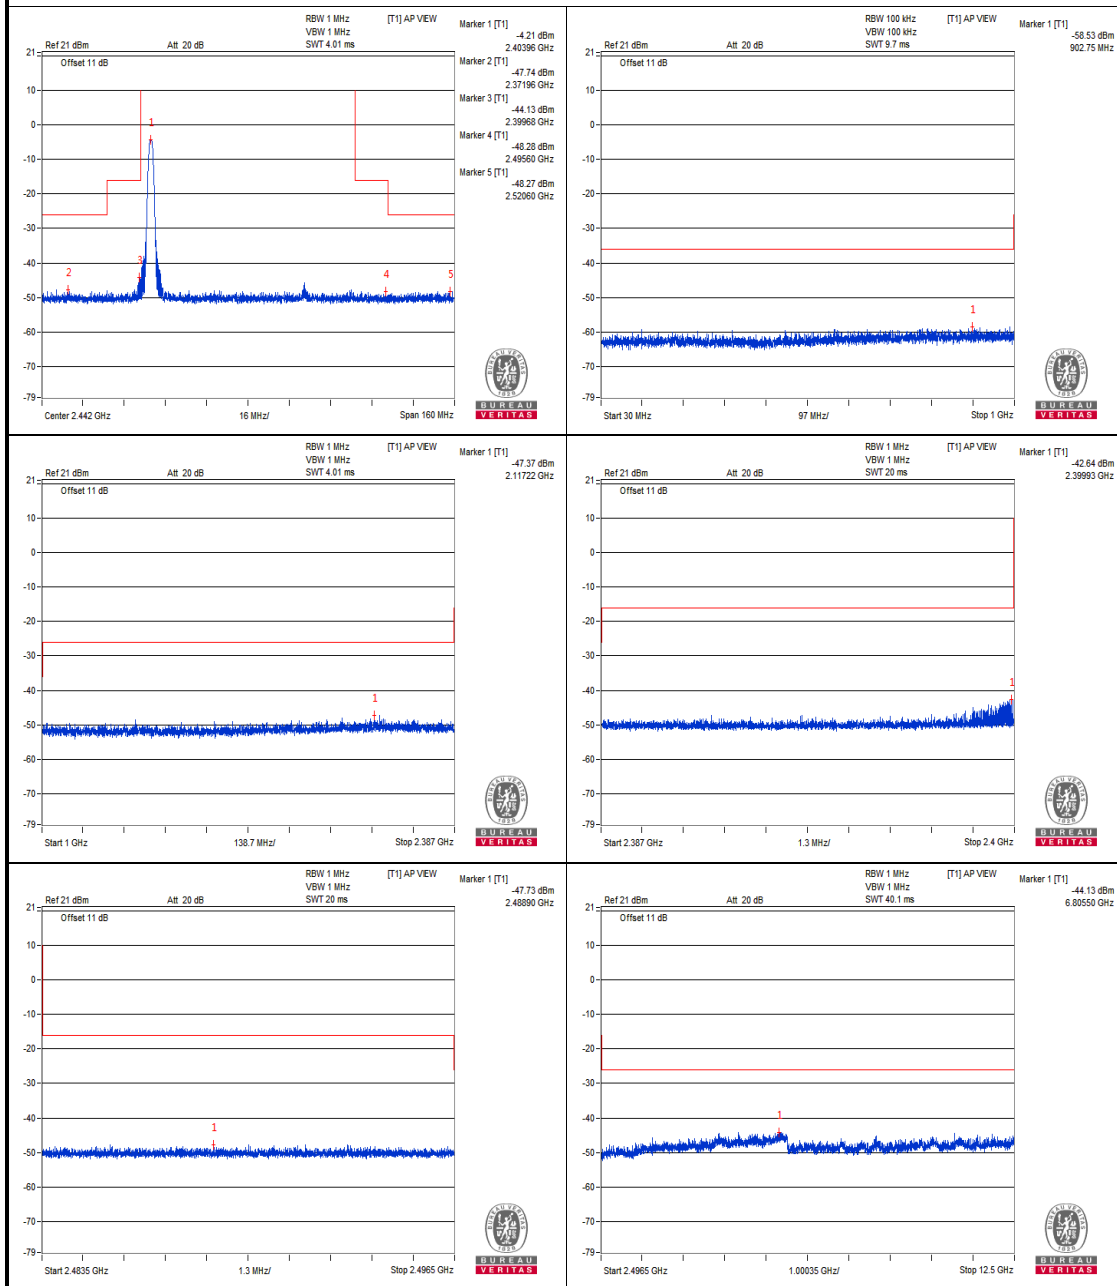


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V-10% Channel 2

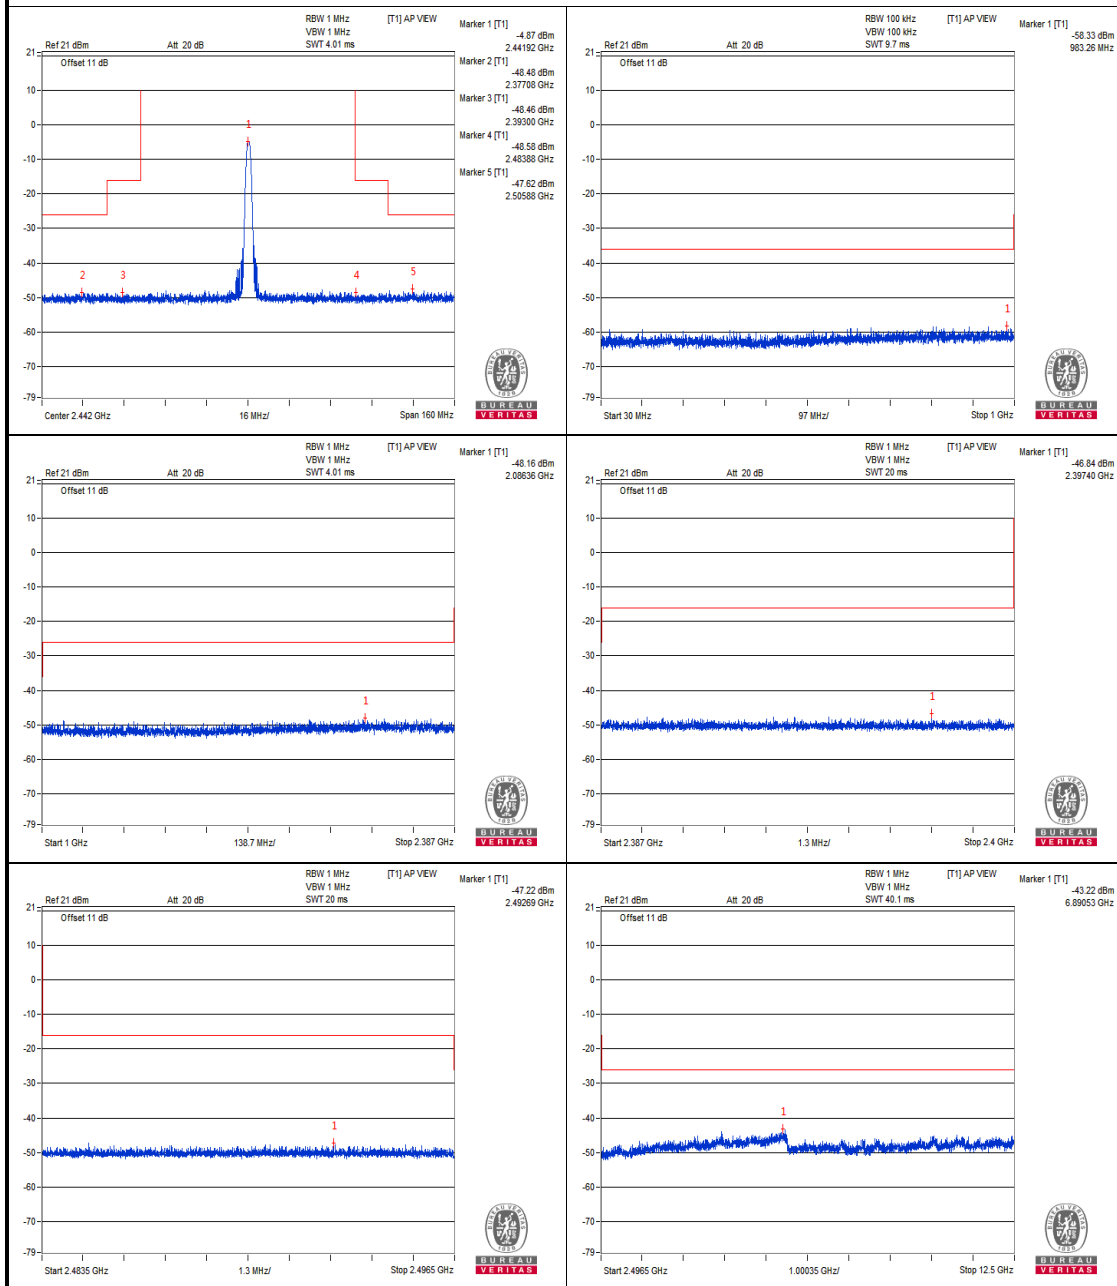


Measurement uncertainty: $\pm 3.93\text{dB}$



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

V-10% Channel 4

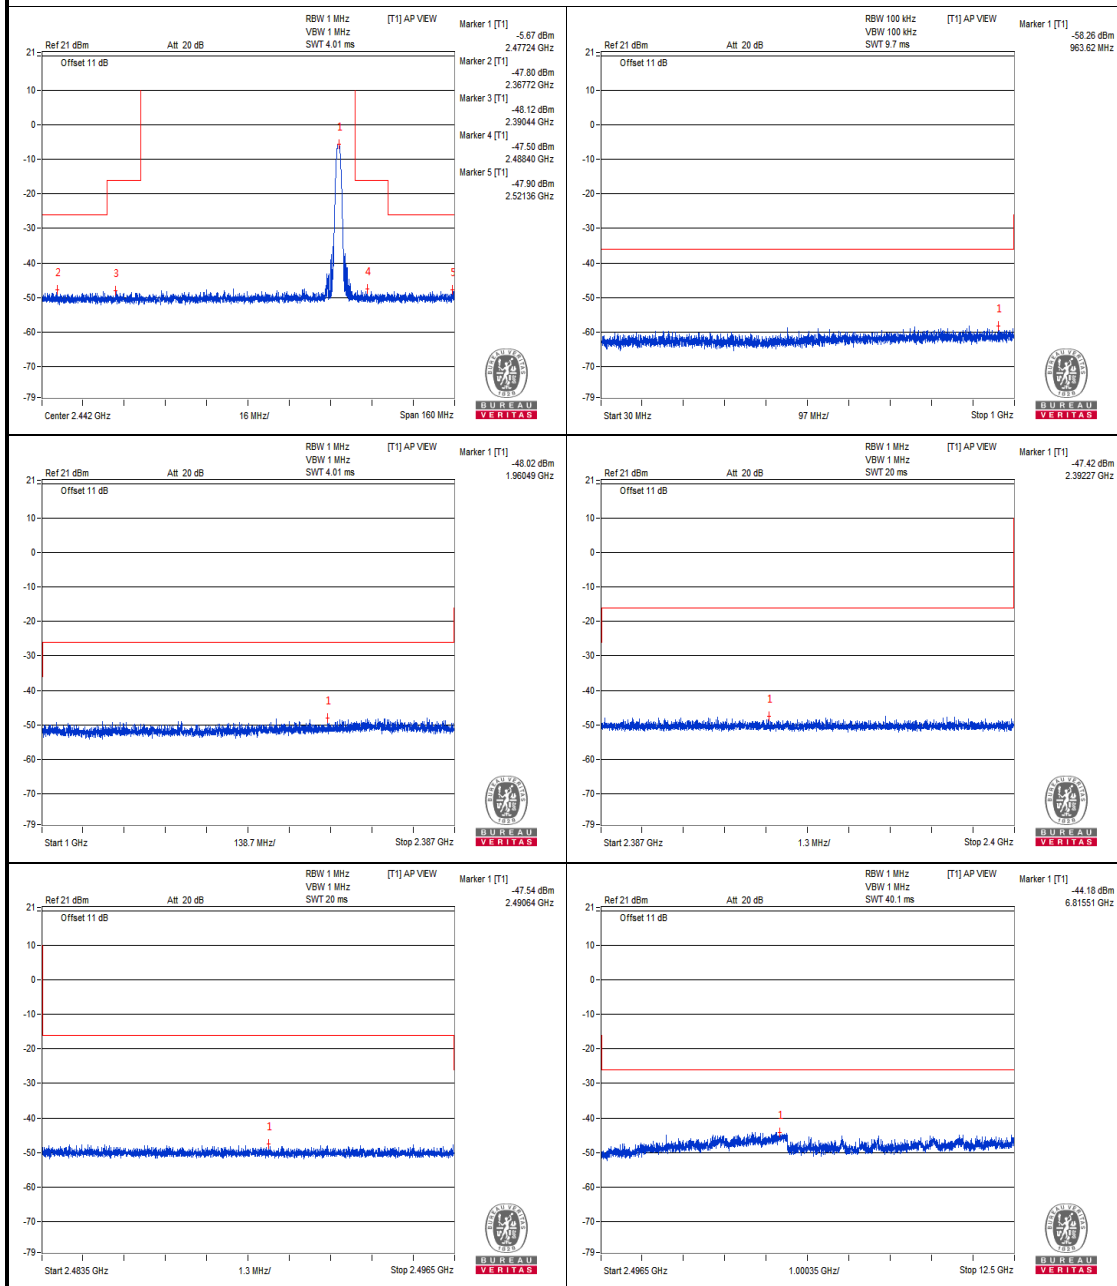

Measurement uncertainty: $\pm 3.93\text{dB}$

3.4 ANTENNA POWER MEASUREMENT

3.4.1 LIMITS OF ANTENNA POWER


Antenna power shall be 10 mW or less.

Tolerance of antenna power shall be +20% (upper value) and –80% (lower value).

3.4.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.4.3 TEST SETUP

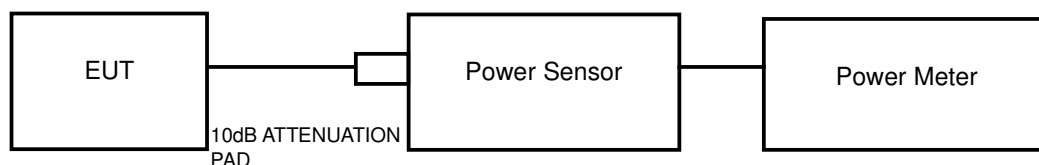

3.4.4 TEST PROCEDURE

1. The transmitter output was connected to the power meter through an attenuator; the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the power level.

**3.4.5 TEST RESULT**

ENVIRONMENTAL CONDITIONS	23 deg.C, 56 % RH		
TEST CONDITION	Conducted RF output power (mW)		
	Low Channel 2404MHz	Middle Channel 2442MHz	High Channel 2477MHz
Normal Voltage	0.395	0.337	0.277
Max Voltage	0.432	0.387	0.322
Min Voltage	0.333	0.294	0.258
Rated power	0.5		
Tolerance of antenna power	0.1 ~ 0.6		

ENVIRONMENTAL CONDITIONS	23 deg.C, 56 % RH		
TEST CONDITION	EIRP output power (mW)		
	Low Channel 2404MHz	Middle Channel 2442MHz	High Channel 2477MHz
Normal Voltage	0.765	0.653	0.536
Max Voltage	0.837	0.749	0.624
Min Voltage	0.645	0.569	0.500

NOTE: The value of radiated RF output densities are "calculated" values.

3.5 SPURIOUS EMISSIONS FOR RECEIVER

3.5.1 LIMITS OF SPURIOUS EMISSIONS FOR RECEIVER

Frequencies (MHz)	Limit
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

3.5.2 TEST METHOD

According to MIC Notice No. 88 Appendix 43.

3.5.3 SUMMARY OF TEST RESULT

ENVIRONMENTAL CONDITIONS		23 deg.C, 56 % RH					
TEST CHANNEL		CH 0 (2404MHz)		CH 2 (2442MHz)		LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)	MEASURE. VALUE	FREQUENCY (MHz)	MEASURE VALUE		
Vnormal	below 1GHz	921.180	0.013709nW	799.210	0.014454nW	4nW	PASS
	above 1GHz	2463.370	2.17771nW	2460.500	3.280953nW	20nW	PASS
V+10%	below 1GHz	741.250	0.016032nW	983.020	0.015631nW	4nW	PASS
	above 1GHz	2457.620	2.243882nW	6911.000	0.463447nW	20nW	PASS
V-10%	below 1GHz	961.440	0.014223nW	757.740	0.014158nW	4nW	PASS
	above 1GHz	2460.500	3.34195nW	6807.500	0.44157nW	20nW	PASS
TEST CHANNEL		CH 4 (2477MHz)				LIMIT	RESULT
TEST CONDITION	FREQUENCY RANGE	FREQUENCY (MHz)		MEASURE VALUE			
Vnormal	below 1GHz	878.990		0.013868nW		4nW	PASS
	above 1GHz	6911.000		0.41783nW		20nW	PASS
V+10%	below 1GHz	881.900		0.012647nW		4nW	PASS
	above 1GHz	6781.620		0.452898nW		20nW	PASS
V-10%	below 1GHz	587.020		0.012474nW		4nW	PASS
	above 1GHz	2463.370		4.130475nW		20nW	PASS


NOTE: 1. The spectrum plots are attached on the following pages.




BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2


Vnormal

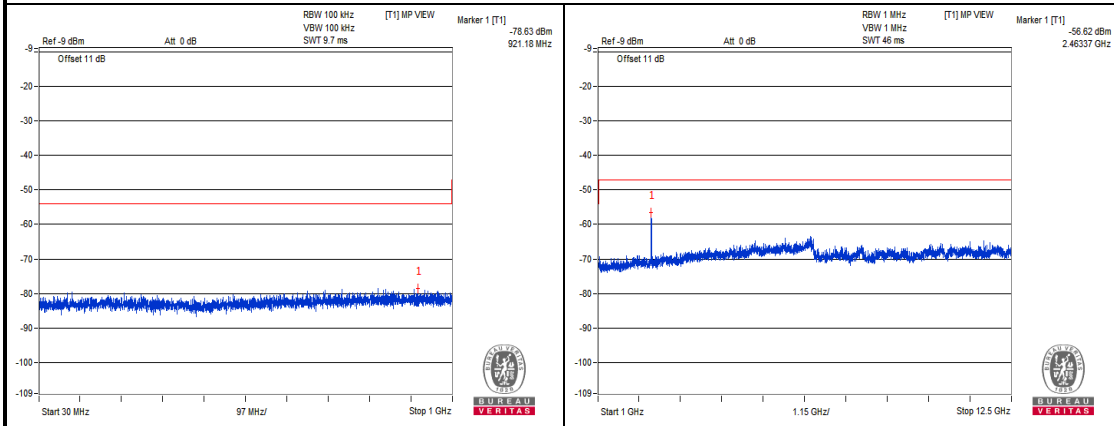

Channel 0

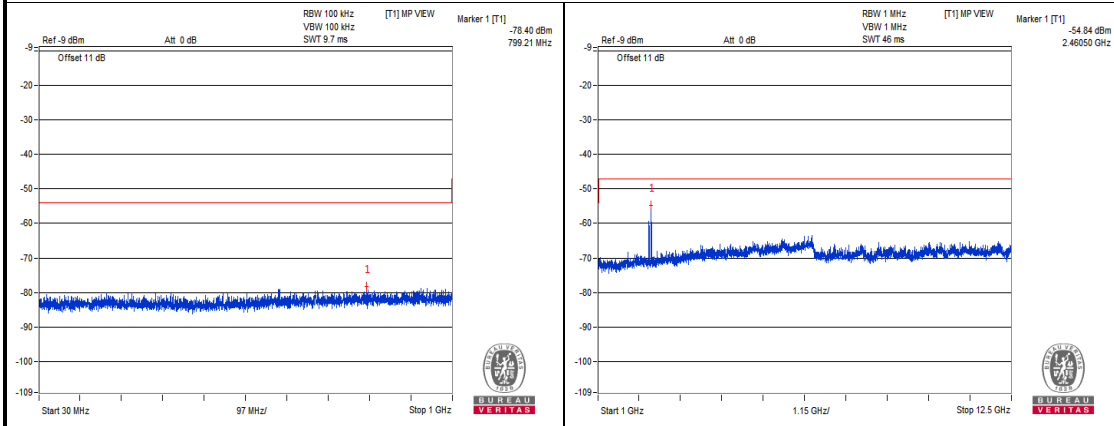

Channel 2

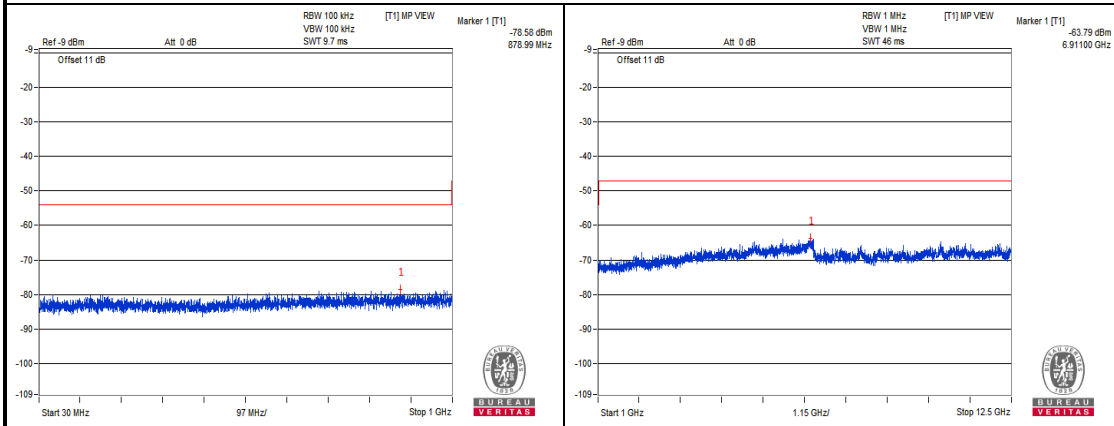

Channel 4


Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2


V+10%

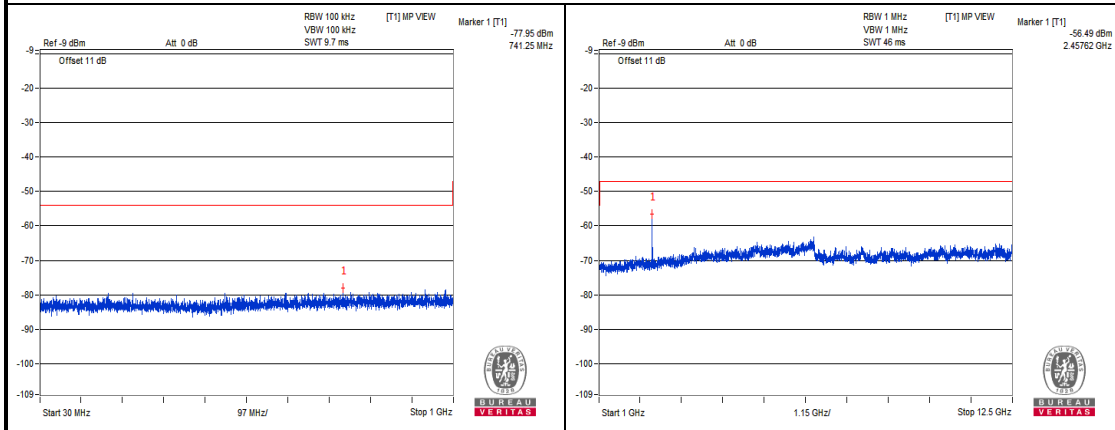

Channel 0

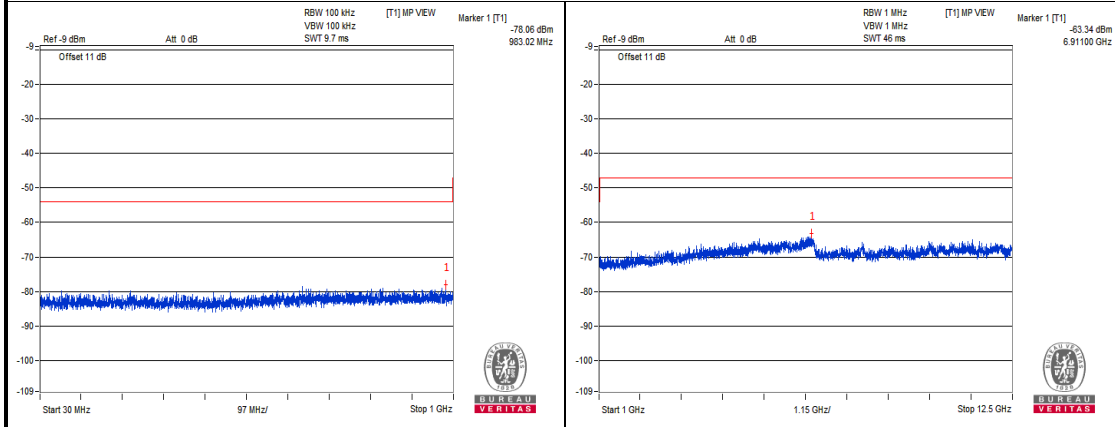

Channel 2

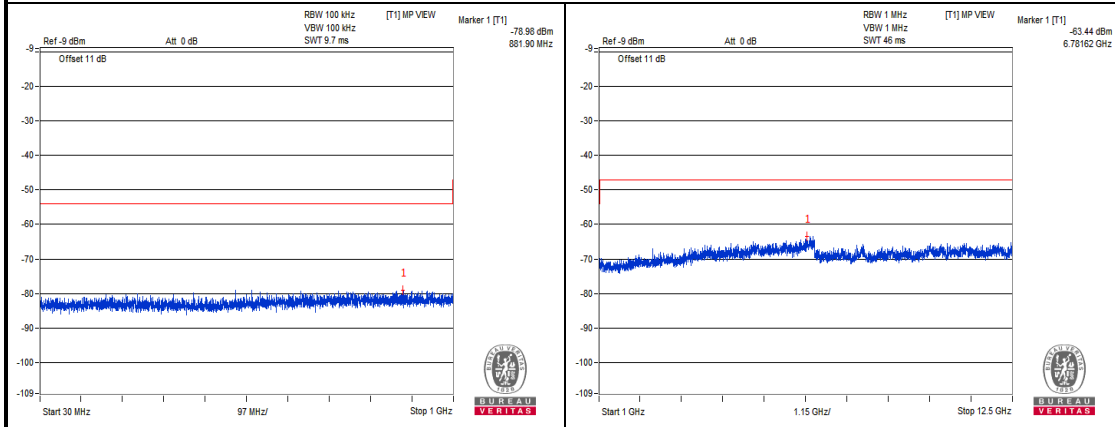

Channel 4


Measurement uncertainty: $\pm 3.93\text{dB}$




BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2


V-10%

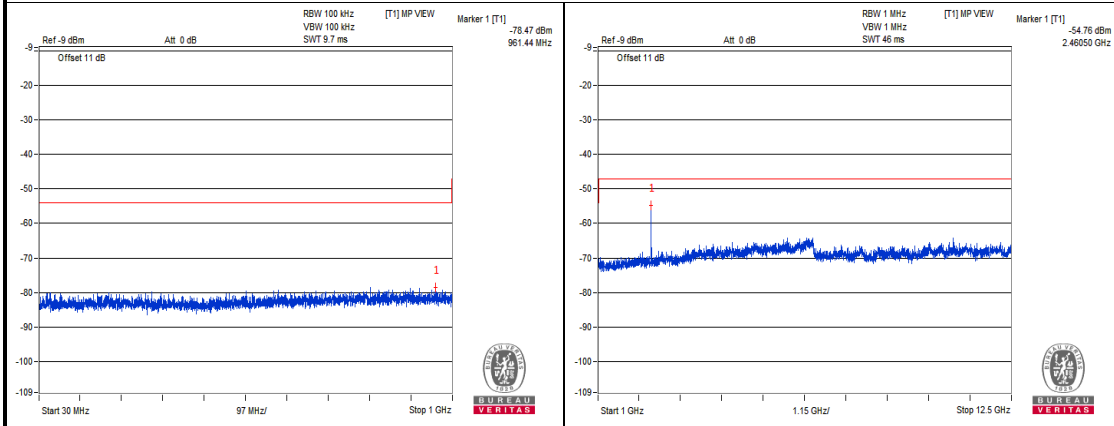

Channel 0

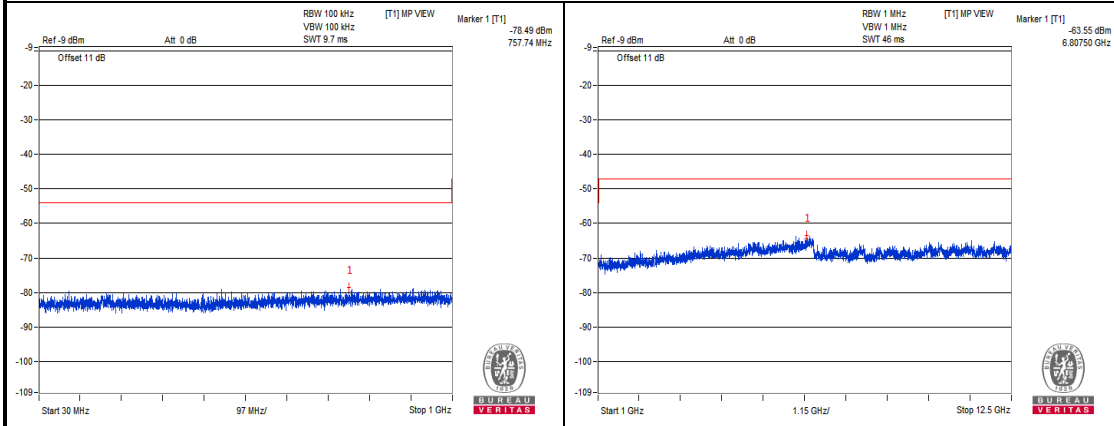

Channel 2

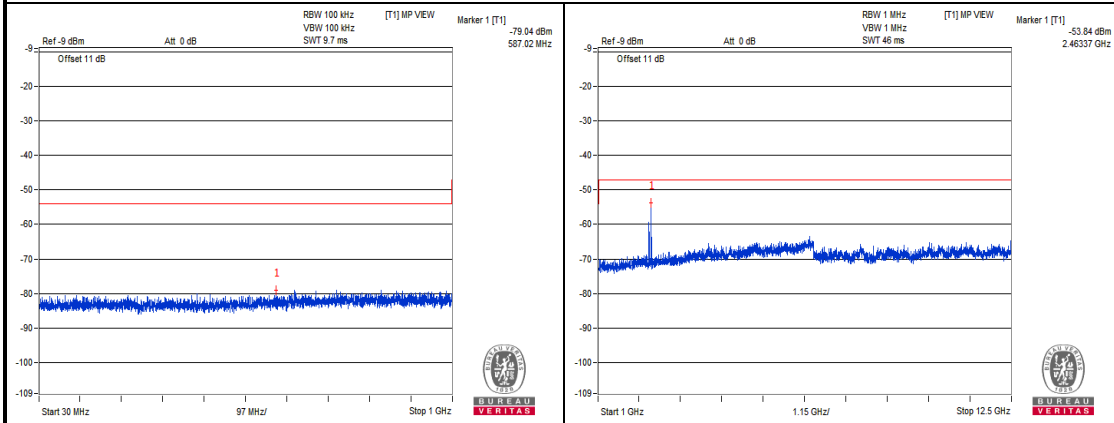

Channel 4


Measurement uncertainty: $\pm 3.93\text{dB}$

3.6 INTERFERENCE PREVENTION FUNCTION

3.6.1 LIMITS OF INTERFERENCE PREVENTION FUNCTION

N/A

3.6.2 TEST SETUP

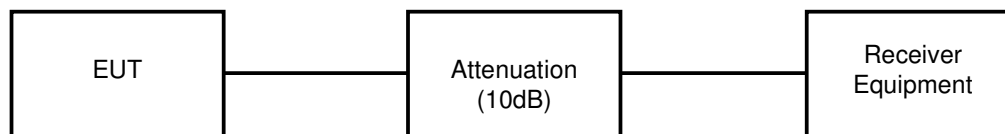

3.6.3 TEST RESULTS

ENVIRONMENTAL CONDITIONS	24.5deg.C, 60% RH
LINK MODE	TEST RESULT
GFSK	PASS



4 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.	Calibration Body	Calibration Method
Signal and Spectrum Analyzer	Rohde& Schwarz	FSV40	101094	Apr. 04,24	GRGT	C
Power Meter	Anritsu	ML2495A	1139001	Feb. 24,24	CEPREI	C
Power Sensor	Anritsu	MA2411B	1531155	Feb. 24,24	CEPREI	C
Digital Multimeter	FLUKE	15B	A1220010DG	Jul. 24, 23	CEPREI	C
Attenuator	MINI	BW-S10W2+	S130129FGE 2	N/A	N/A	C

NOTE:

1. The test was performed in RF Ovenroom.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

Calibration Method:


- a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1)
- b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992)
- c) Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1)
- d) Calibration conducted by using measuring instruments and other equipment listed in the right column of Table No. 3 attached hereto, which shall have been given any of calibration, etc. listed above from a) to c)



BUREAU
VERITAS

Test Report No.: RJ2303WDG0221-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

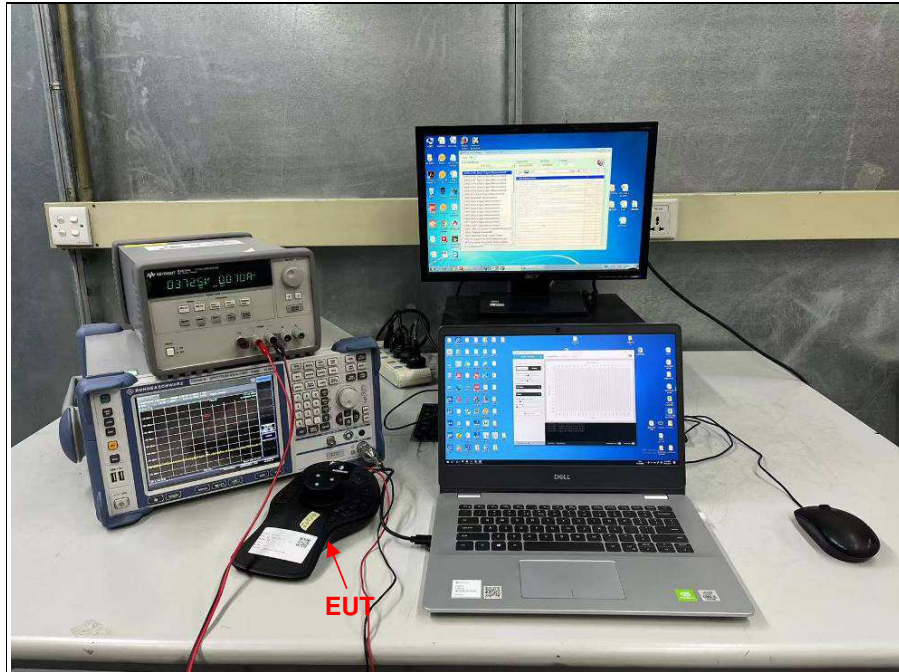



Test Report No.: RJ2303WDG0221-2

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

--- END ---