

DFS Test Report

Report No.: RJ200417C06-2

Test Model: DBA-2620P

Received Date: Apr. 17, 2020

Test Date: May 09 ~ May 11, 2020

Issued Date: May 14, 2020

Applicant: D-LINK CORPORATION

Address: No. 289, Sinhu 3rd Rd., Neihu District, Taipei City, 114, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Dynamic Frequency Selection	5
2.1 Test Limits and Radar Signal Parameters.....	6
2.2 Test Instruments.....	9
2.3 EUT Information	9
2.4 Description of Support Units	10
2.5 Test Procedure	10
2.6 Deviation from Test Standard.....	11
2.7 Conducted Test Setup Configuration	11
2.8 Photographs of the Test Configuration.....	12
2.8.1 List of Measurements	12
2.8.2 Test Result.....	13
2.8.2.1 Channel Availability Check Time.....	19
Appendix – Information of the Testing Laboratories	40

Release Control Record

Issue No.	Description	Date Issued
RJ200417C06-2	Original release	May 14, 2020

1 Certificate of Conformity

Product: Business Cloud Access Point / Nuclias Cloud-Managed AC1300 Wave 2 Access Point

Brand: D-Link

Test Model: DBA-2620P

Sample Status: Identical Prototype

Applicant: D-LINK CORPORATION

Test Date: May 09 ~ May 11, 2020

Standards: ARIB STD-T71, MIC notice 88 Appendix 45

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Polly Chien, **Date:** May 14, 2020
Polly Chien / Specialist

Approved by : Bruce Chen, **Date:** May 14, 2020
Bruce Chen / Senior Project Engineer

2 Dynamic Frequency Selection

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Slave. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables A and B for the applicability of DFS requirements prior to use a channel (Channel Availability Check) and during normal operation (In-Service Monitoring) for each of the operational modes.

Table A: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode
	Master
Interference Detection Threshold	✓
Channel Availability Check Time	✓
Non-Occupancy Period	✓

Table B: Applicability of DFS requirements during normal operation

Requirement	Operational Mode
	Master
Interference Detection Threshold	✓
Channel Closing Transmission Time	✓
Channel Move Time	✓
Non-Occupancy Period	✓

2.1 Test Limits and Radar Signal Parameters

Interference Threshold Values

Master Device

Maximum Transmit Power	Power Value
$\geq 200\text{mW}$ ($\geq 23\text{dBm}$)	-64dBm
$< 200\text{mW}$ ($< 23\text{dBm}$)	-62dBm
This level is only for 0dBi EUT antenna gain	

DFS Requirement Time Values

Parameter	Value
Channel Availability Check Time	60 s
Non-occupancy Period	30 minutes
Channel Move Time	10 s
Channel Closing Transmission Time	260 ms

Parameters of DFS Test Signals

W53

Radar Test Signal	Pulse Repetition Frequency (PRF)	Pulse Width (us)	Number of Pulses per Burst	Burst Period (sec)	Radar Detection Probability
DFS-J1-1	700	1	18	15	60% or more
DFS-J1-2	260	2.5	18	15	60% or more

*1. The Channel Loading is 50% of Maximum Transmission Data Rate.

*2. The receiving threshold level is the following. (This is the average power while receiving radar with an absolute gain 0 dBi antenna.)

The case of $P_o \geq 200\text{mW}$; $\geq -64\text{dBm}(\text{avg.})$ / The case of $P_o < 200\text{mW}$; $\geq -62\text{dBm}(\text{avg.})$

(P_o ; Max. Transmit Power (EIRP) of EUT)

W56

Radar Type	Pulse Repetition Frequency (PRF)	Pulse Width (μsec)	Number of Pulses	Radar Detection Probability
DFS-J2-1	720	0.5	18	60% or more
DFS-J2-2	250	2	18	60% or more
DFS-US-1	700	1	18	60% or more
DFS-US-2	4347 – 6667	1-5	23-29	60% or more
DFS-US-3	2000 – 5000	6-10	16-18	60% or more
DFS-US-4	2000 – 5000	11-20	12-16	60% or more
Aggregate (Radar Types 1-6)				80% or more

*1. The Channel Loading is 17% of Maximum Transmission Data Rate.

*2. The aggregate is the average of the percentage of successful detections of 6 Radar Types.

*3. The receiving threshold level is the following. (This is the average power while receiving radar with an absolute gain 0 dBi antenna.)

The case of $P_o \geq 200\text{mW}$; $\geq -64\text{dBm}(\text{avg.})$ / The case of $P_o < 200\text{mW}$; $\geq -62\text{dBm}(\text{avg.})$

(P_o ; Max. Transmit Power (EIRP) of EUT)

Radar Type	Pulse Repetition Frequency (pps)	Pulse Width (μsec)	Number of Pulses per Burst	Radar Detection Probability
DFS-US-5	500-1000	50 - 100	1-3	80% or more

*1. The Channel Loading is 17% of Maximum Transferred Data Rate.

*2. The transmission period for Long Pulse Radar test signal is 12 seconds.

*3. Each pulse has a liner frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulse in different Bursts may have different chirp widths.

*4. There are a total of 8 to 20 Bursts in the 12 second period. The interval of Burst is the time when divided 12 seconds by the number of the bursts.

*5. In the case of being lots pulse in the Burst, each pulse is same as them.

*6. In the case of being lots pulse in the Burst, each Burst within the 12 second sequence must have a different number of pulses.

*7. The receiving threshold level is the following. (This is the average power while receiving radar with an absolute gain 0 dBi antenna.)

The case of $P_o \geq 200\text{mW}$; $\geq -64\text{dBm}(\text{avg.})$ / The case of $P_o < 200\text{mW}$; $\geq -62\text{dBm}(\text{avg.})$

(P_o ; Max. Transmit Power (EIRP) of EUT)

Radar Type	Pulse Repetition Frequency (pps)	Pulse Width (μsec)	Pulses per Hop	Radar Detection Probability
DFS-US-6	3000	1	9	70% or more

*1. The Channel Loading is 17% of Maximum Transferred Data Rate.
 *2. The frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250MHz to 5724MHz.
 *3. The Switching Interval of Hopping Sequence is 3 millisecond, and the Hopping Sequence Length is 300 millisecond.
 *4. The Burst Interval is 3 millisecond.
 *5. The receiving threshold level is the following. (This is the average power while receiving radar with an absolute gain 0 dBi antenna.)
 The case of $P_o \geq 200\text{mW}$; $\geq -64\text{dBm}(\text{avg.})$ / The case of $P_o < 200\text{mW}$; $\geq -62\text{dBm}(\text{avg.})$
 (P_o ; Max. Transmit Power (EIRP) of EUT)

2.2 Test Instruments

Description & Manufacturer	Model No.	Brand	Date of Calibration	Due Date of Calibration	Calibration Authority	Calibration Method
Spectrum analyzer	ESR	R&S	Mar 04, 2020	Mar 03, 2021	ETC	Refer to Note 2
Signal generator	MXG	KEYSIGHT	Dec. 23 ,2019	Dec. 22 ,2020	ETC	Refer to Note 2
Horn antenna	BBHA 9120 D	Schwarzbeck	Nov. 24, 2019	Nov. 23, 2020	BV CPS E&E	Refer to Note 2
RF coaxial cable	SUCOFLEX 104	HUBER SUHNER	NA	NA	BV CPS E&E	Refer to Note 2

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency. (1) Electronics Testing Center, Taiwan. (2) Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
3. Calibrate the RF coaxial cable before each test and use the radiation or conducted method to calibrate the reference FCC KDB 412172 standard.

2.3 EUT Information

EUT Software and Firmware Version

No.	Product	Test Model No.	Software/Firmware Version
1	Business Cloud Access Point / Nuclias Cloud-Managed AC1300 Wave 2 Access Point	DBA-2620P	2.01.001

Description of Available Antennas to the EUT

Ant NO.	Antenna Type	Connector	Operation Frequency Range(MHz)	Gain(dBi)
1	AUX	IPEX	5250-5725	6.1
2	AUX	IPEX	5250-5725	6.1

2.4 Description of Support Units

Support Unit information

No.	Product	Brand	Model No.	Software/Firmware Version
1	WiFi USB Adapter	D-Link	A6210	5.1.35.0

Note: This device was functioned as a ☐Master ☒Slave device during the DFS test.


2.5 Test Procedure

The measured channels are in the W53 and W56 bands. The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) with -64dBm power level for W53 band and -64dBm power level for W56 band, measured the Channel Availability Check time and channel closing transmission time and channel move time and Non-Occupancy Period. When test W53 Band, The Channel Loading is 50% of Maximum Transmission Data Rate. When test W56 Band, The Channel Loading is 17% of Maximum Transmission Data Rate.

2.6 Deviation from Test Standard


No deviation.

2.7 Conducted Test Setup Configuration

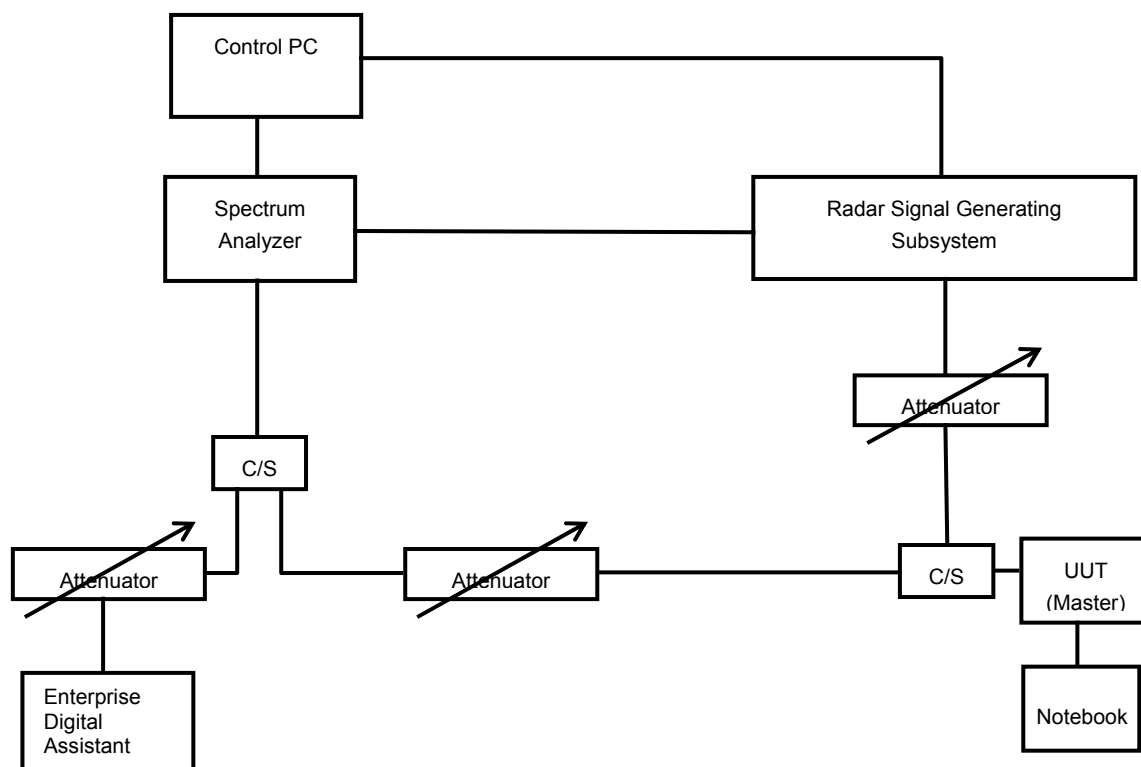

The UUT is capable of operating as a Master mode. The radar test signals are injected into the Master Device.

2.8 Photographs of the Test Configuration

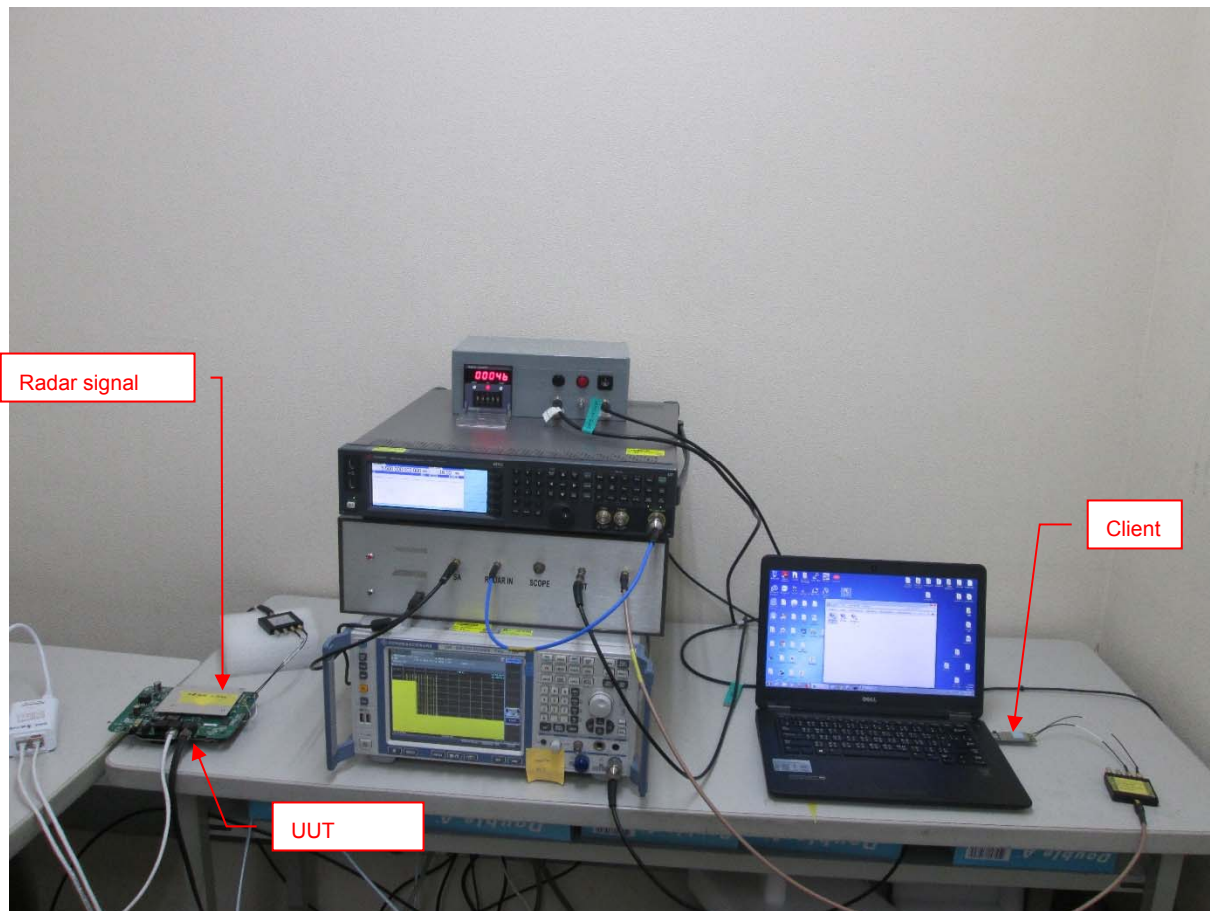

2.8.1 List of Measurements

Clause	Test Parameter	Remarks	Pass/Fail
6.3.5.6	Interference Detection Threshold	Applicable	Pass
6.3.5.6	Channel Availability Check Time	Applicable	Pass
6.3.5.6	Channel Closing Transmission Time	Applicable	Pass
6.3.5.6	Channel Move Time	Applicable	Pass
6.3.5.6	Non-Occupancy Period	Applicable	Pass

Note:



1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. This UUT is capable of operating as a master (with radar detection).

2.8.2 Test Result

INTERFERENCE THRESHOLD VALUES INJECTED INTO AP



W53



For an interference threshold level of -64dBm and the AP antenna gain is 6.1dBi . Then the radar Burst signal level to the AP connector is -57.9dBm .

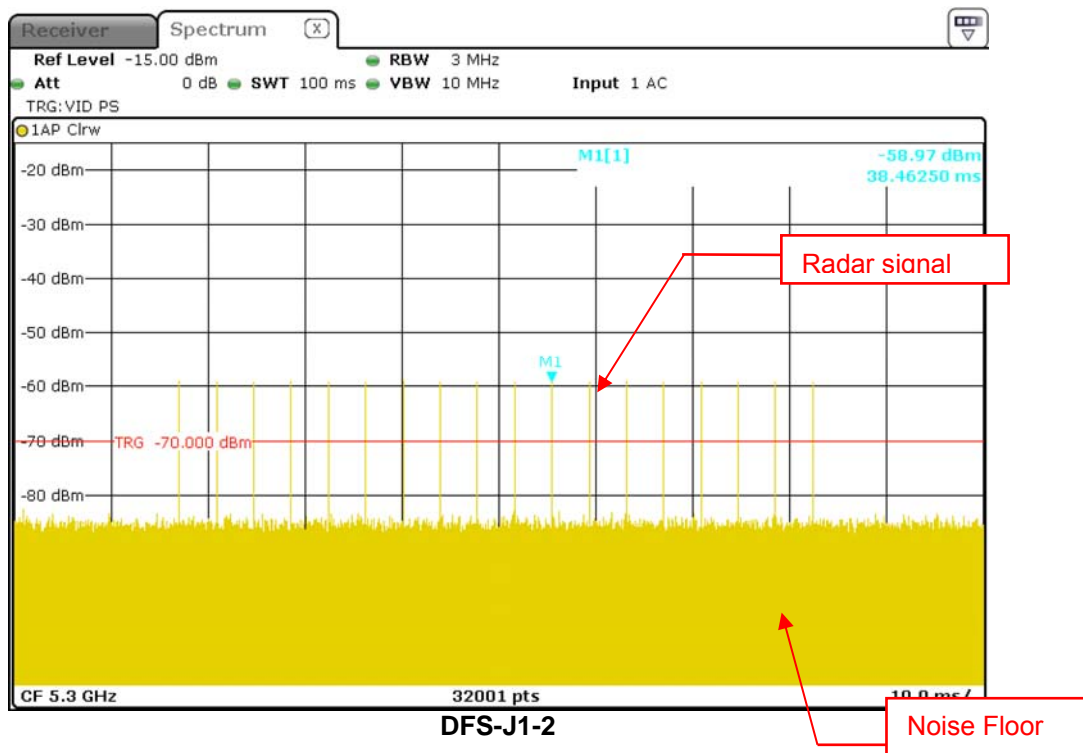
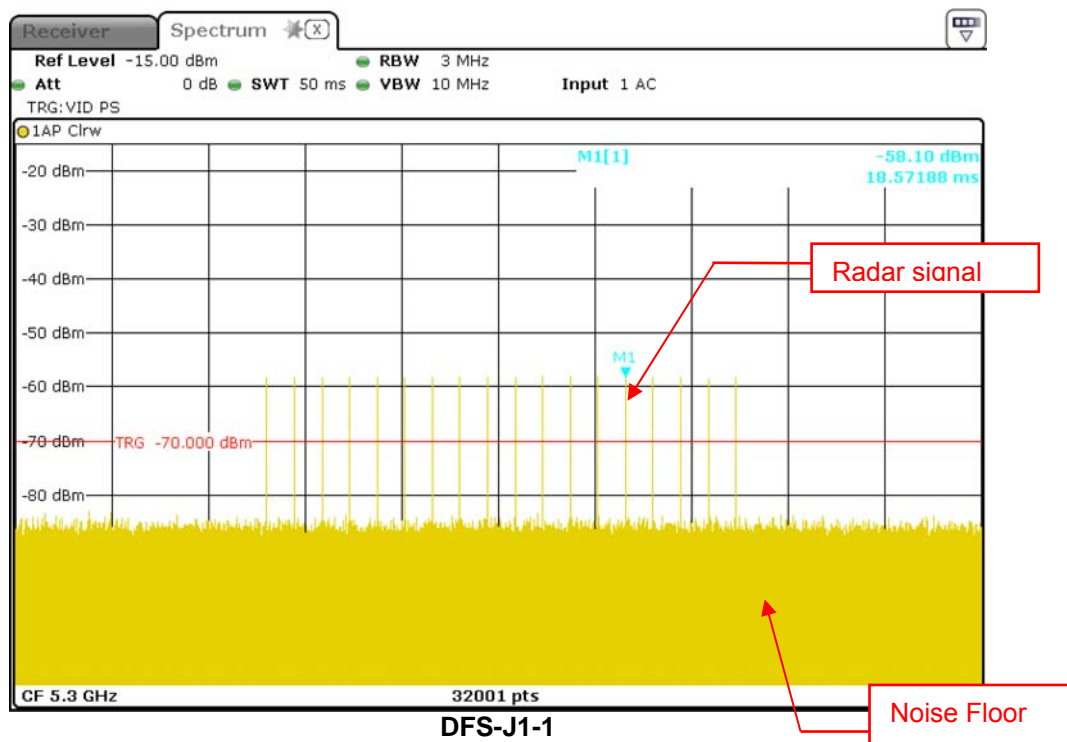




W56


For an interference threshold level of -64 dBm and the AP antenna gain is 6.1 dBi . Then the radar Burst signal level to the AP connector is -57.9 dBm

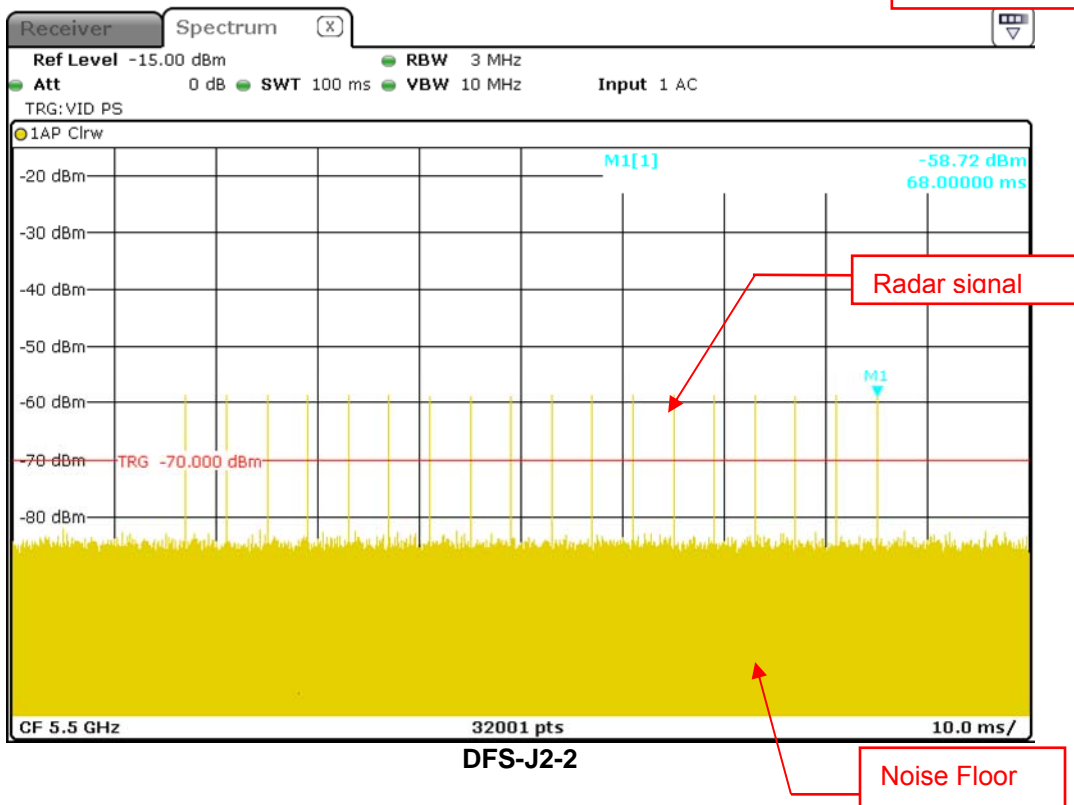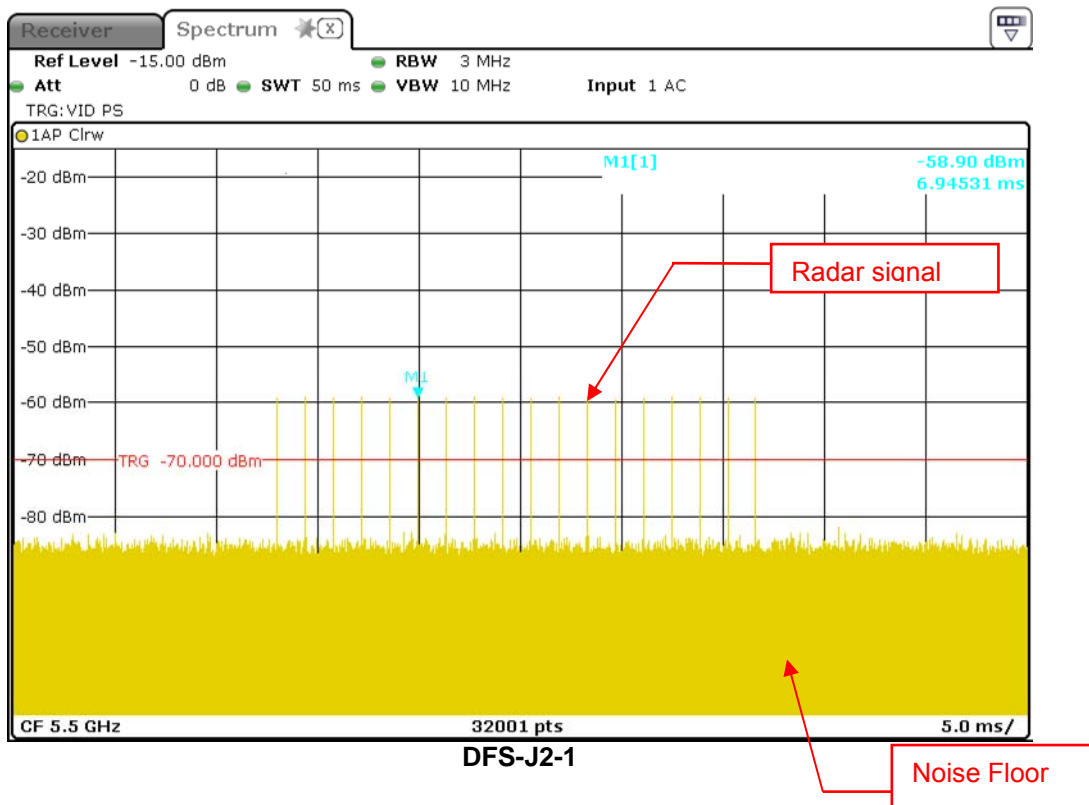

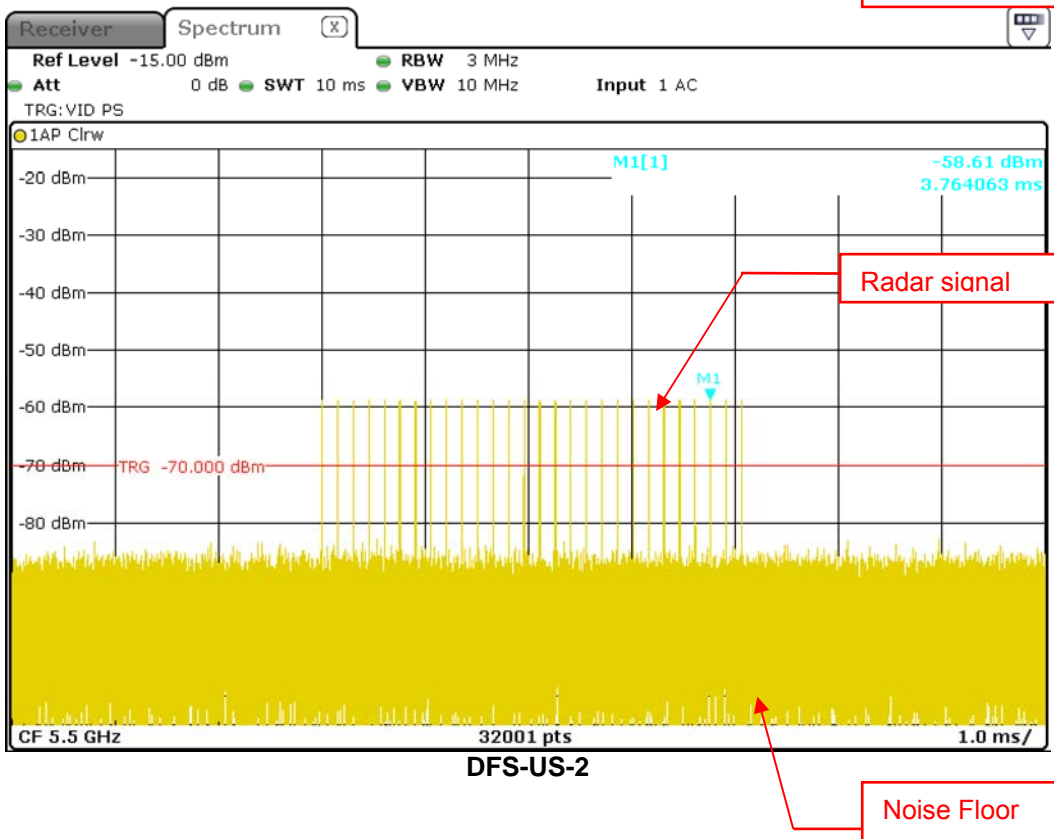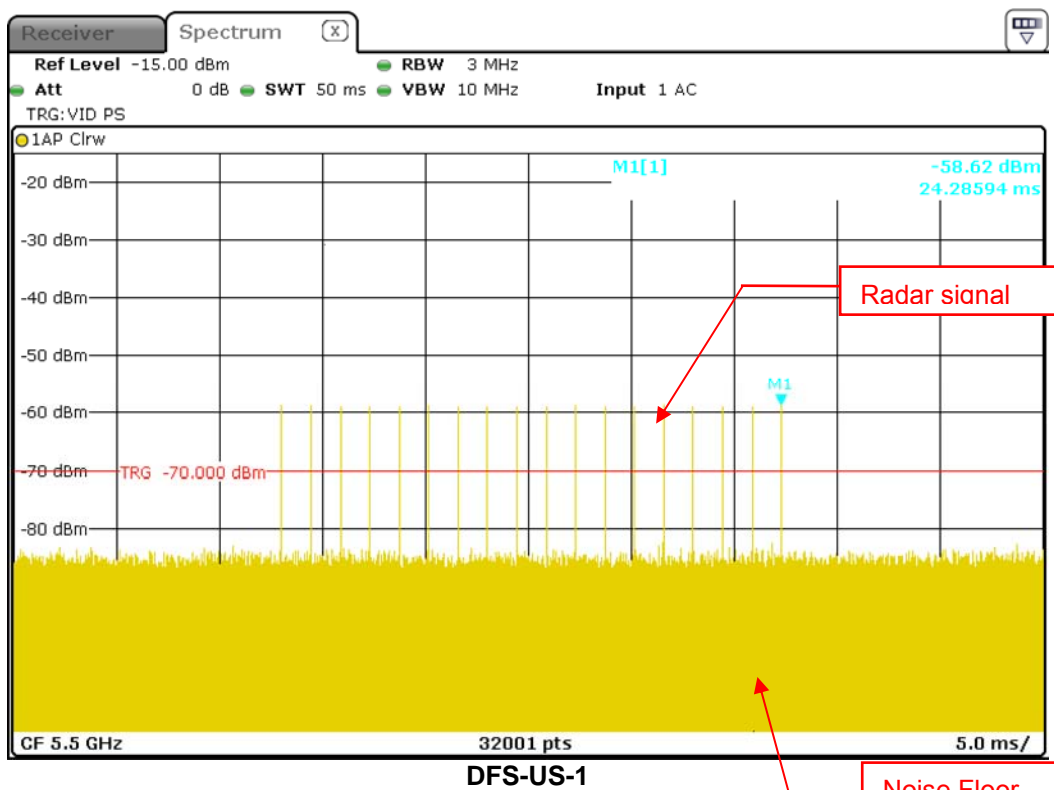

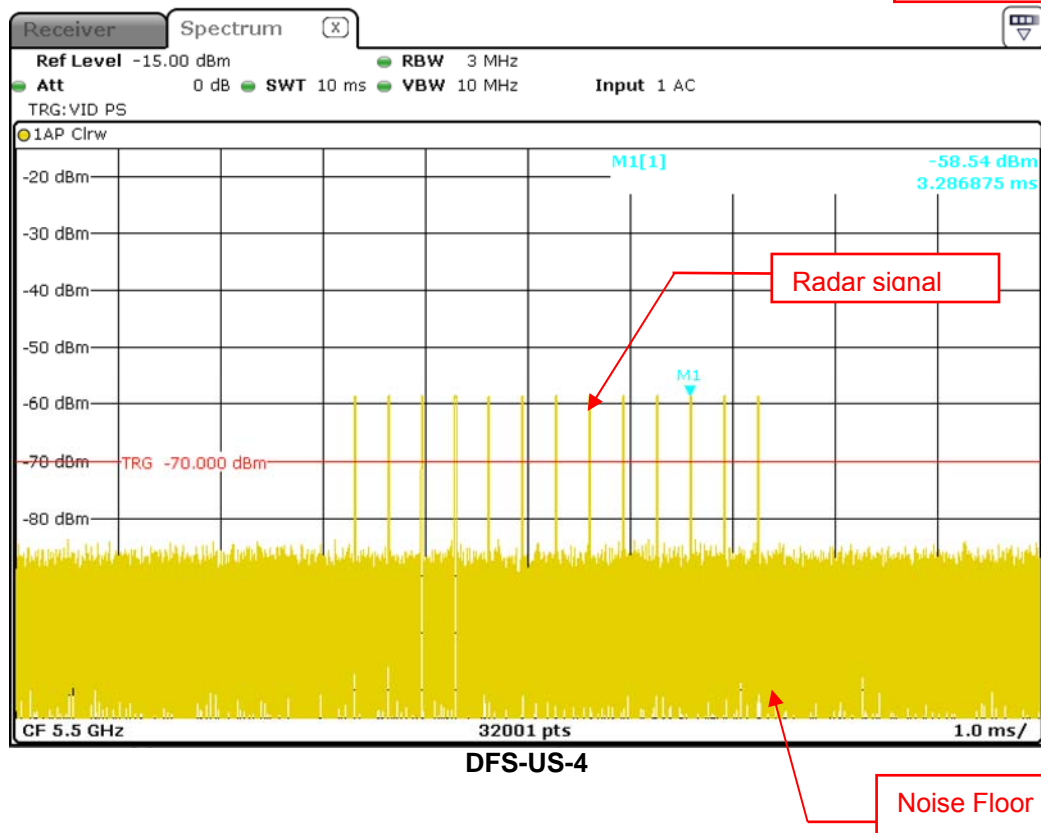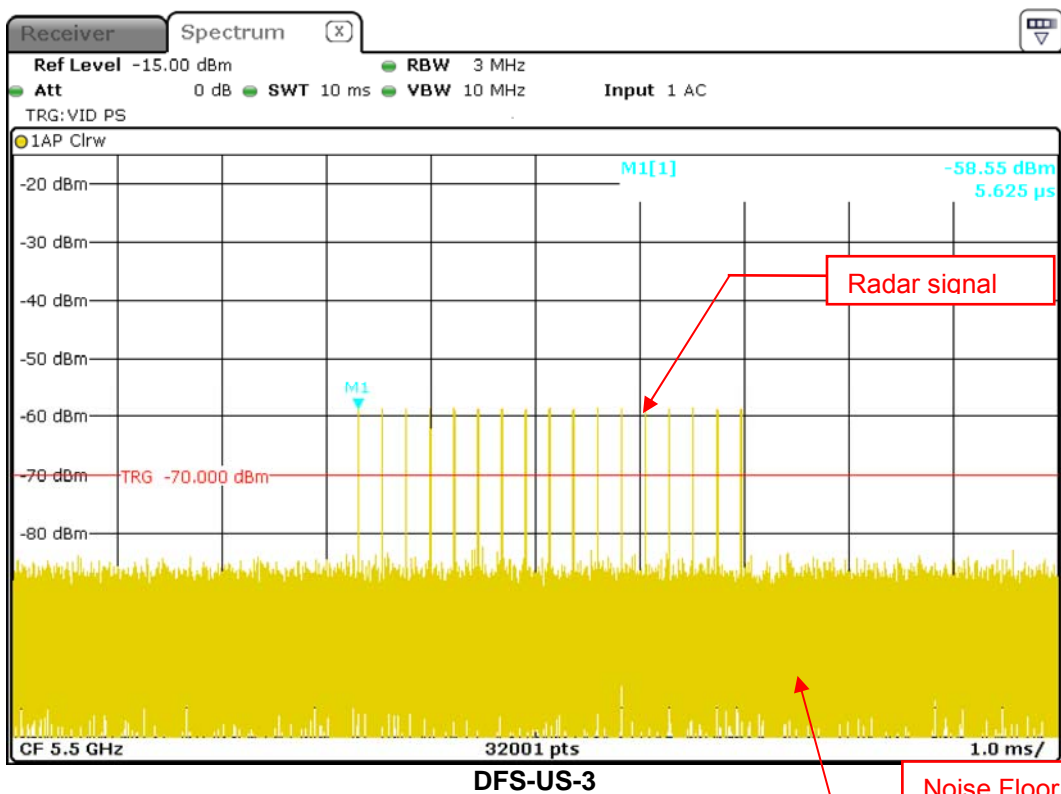

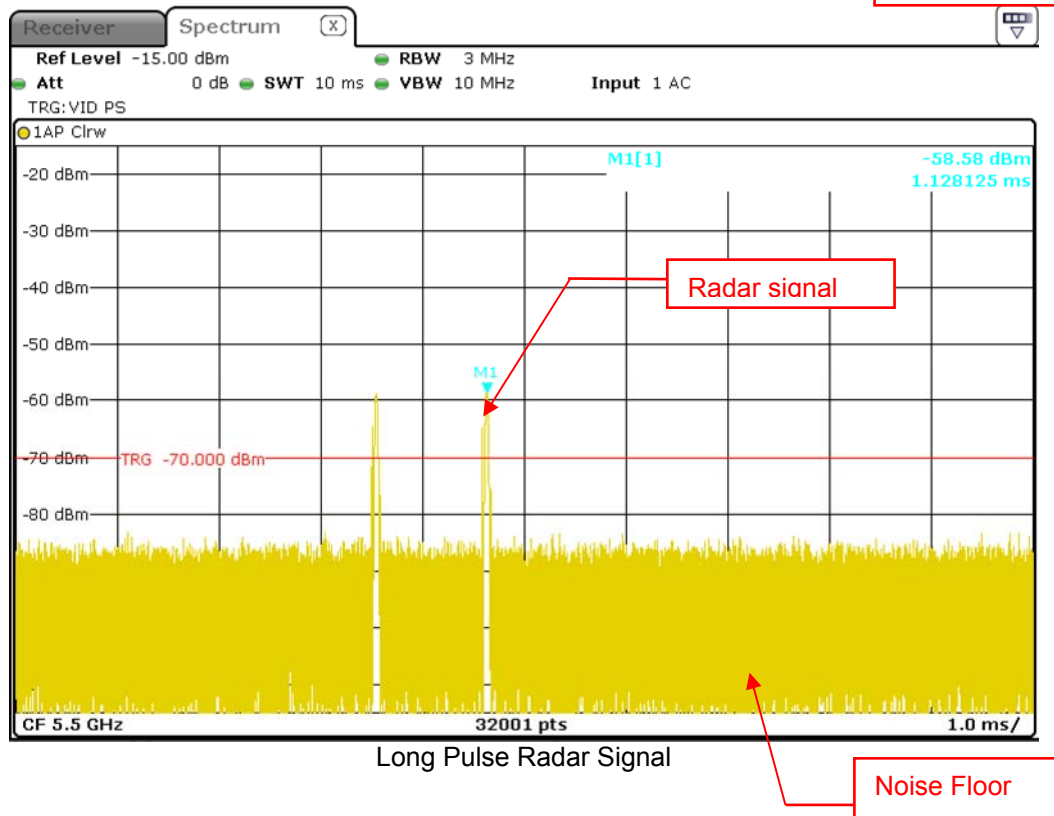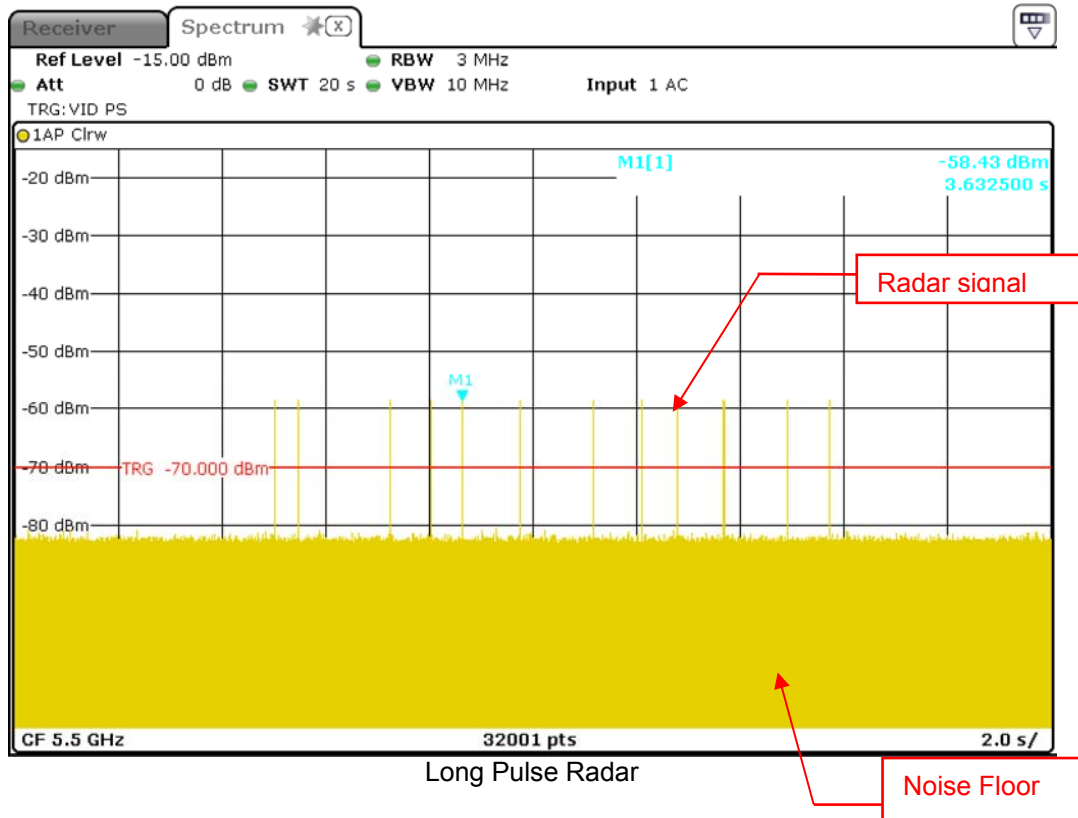

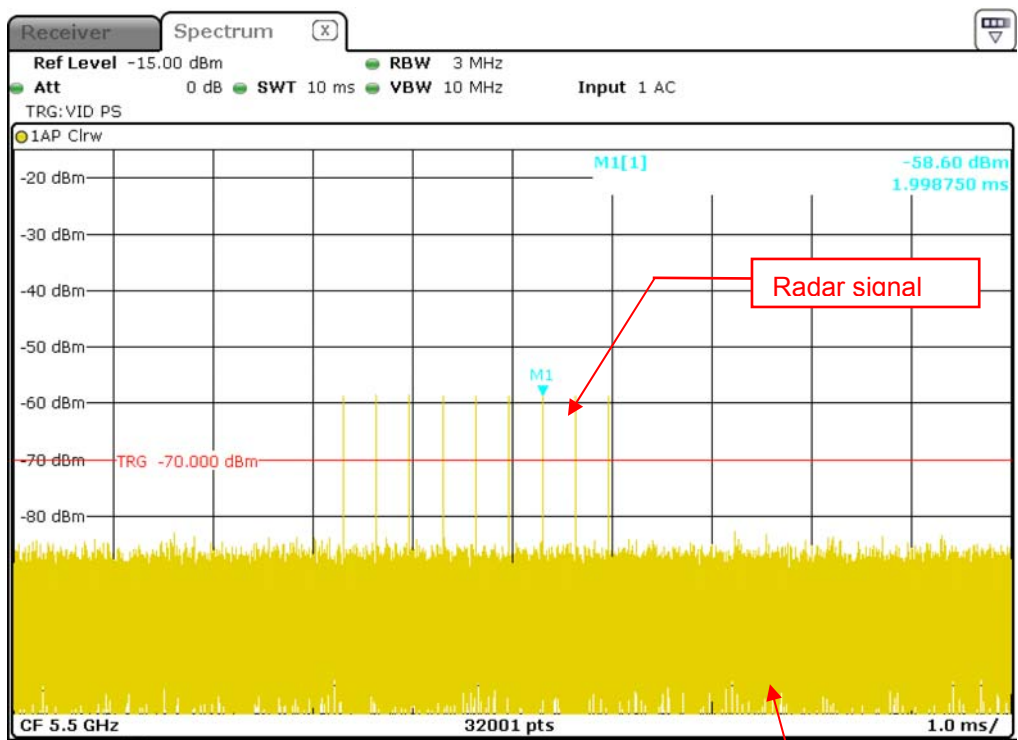

Frequency Hopping Radar Signal

Noise Floor


2.8.2.1 Channel Availability Check Time

For W53

If the UUT successfully detected the radar burst, it should be observed as the UUT has no transmissions occurred until the UUT starts transmitting on another channel.


Timing of Radar Signal	Observation	
	UUT	Spectrum Analyzer
Within 1 to 6 second	Detected	No transmissions
Within 54 to 60 second	Detected	No transmissions

Initial Channel Availability Check Time W53 Channel Availability Check

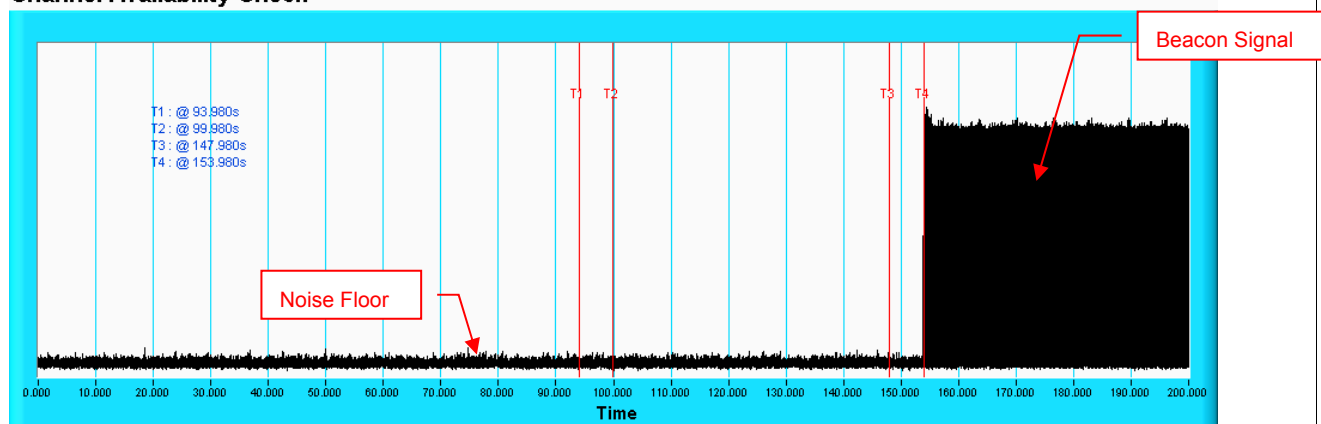


Note: T1 denotes the end of power-up time period is 93.98th second. T4 denotes the end of Channel Availability Check time is 153.98th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

Radar Burst at the Beginning of the Channel Availability Check Time Channel Availability Check

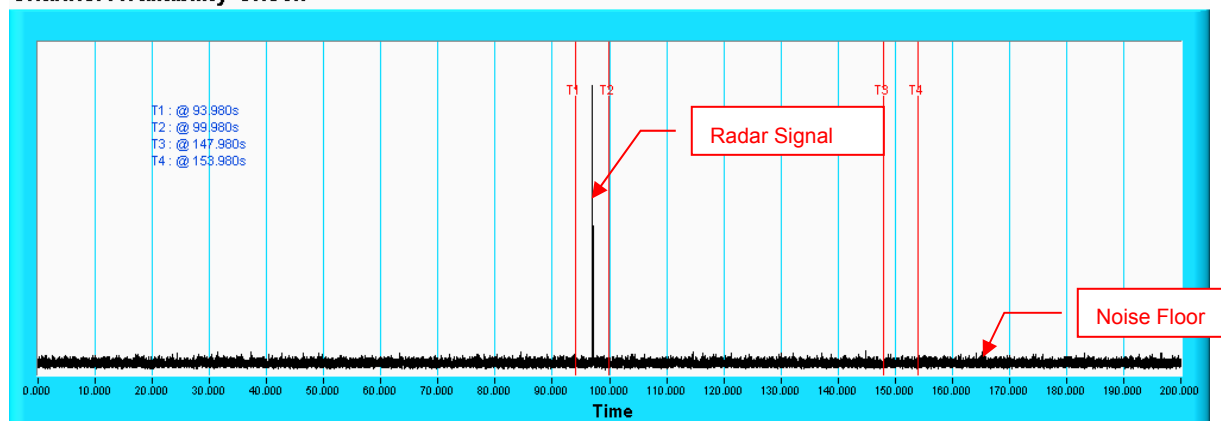

Note: T1 denotes the end of power up time period is 93.98th second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 153.98th second.


Radar Burst at the End of the Channel Availability Check Time Channel Availability Check

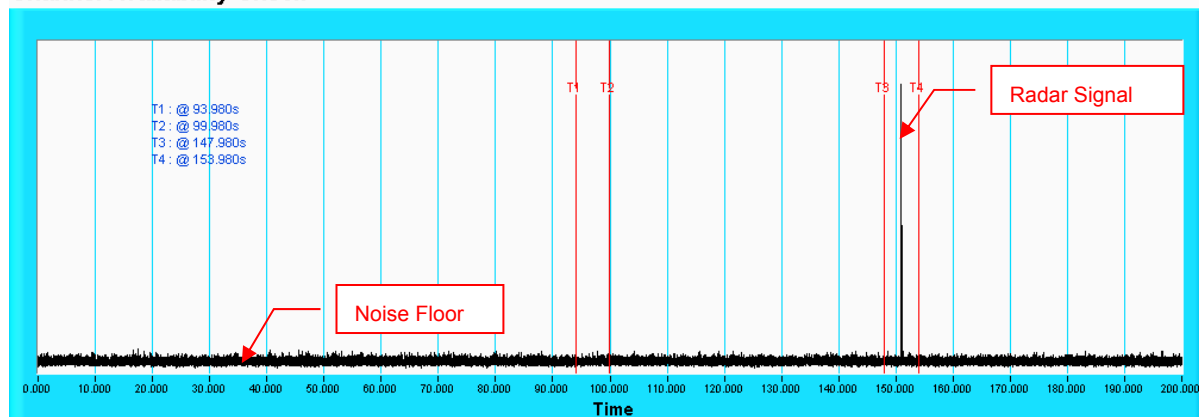

Note: T1 denotes the end of power up time period is 93.98th second. T3 denotes 147.98th second and T4 denotes the 153.98th second. The radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.


W56

Channel Availability Check

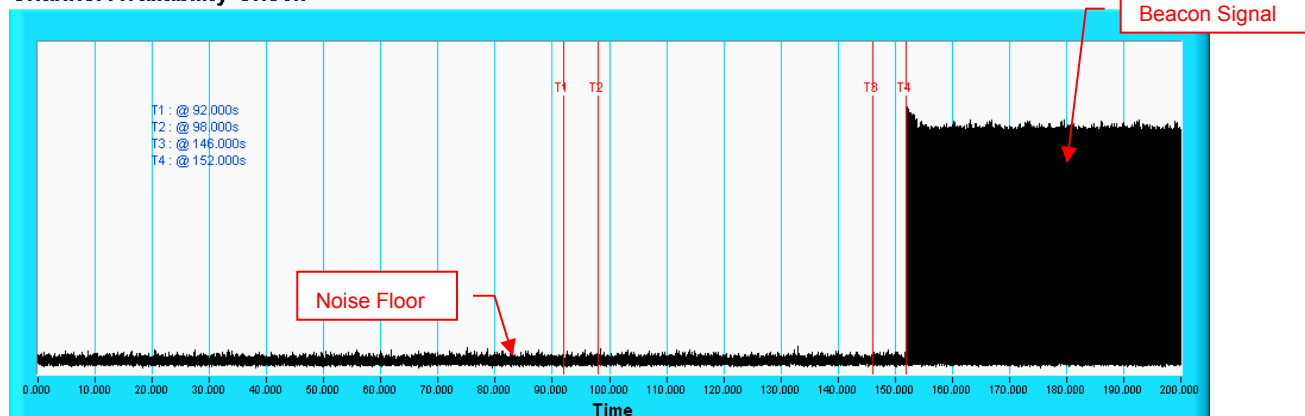


Note: T1 denotes the end of power-up time period is 92th second. T4 denotes the end of Channel Availability Check time is 152th second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

Radar Burst at the Beginning of the Channel Availability Check Time

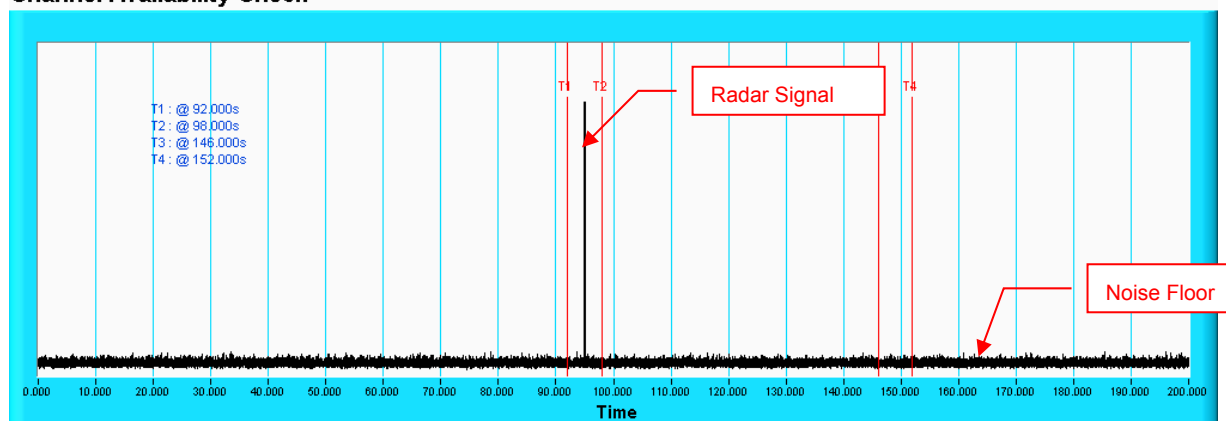

Note: T1 denotes the end of power up time period is 92th second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T4 denotes the 152th second.

Channel Availability Check

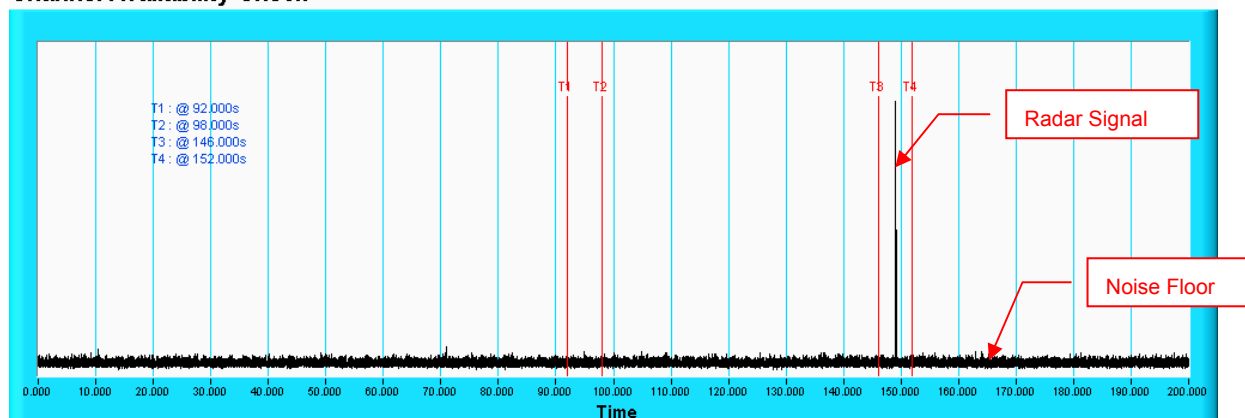

Note: T1 denotes the end of power up time period is 92th second. T3 denotes 146th second and T4 denotes the 152th second. The radar burst was commenced within 54th second to 60th second window starting from the end of power-up sequence.


CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME

The channel closing time is aggregated duration of all transmissions from the UUT during the channel move time. The Aggregate duration of all transmission of the UUT does not include quiet periods in between transmissions of the UUT.

W53 WLAN TRAFFIC

802.11a

Duty Cycle

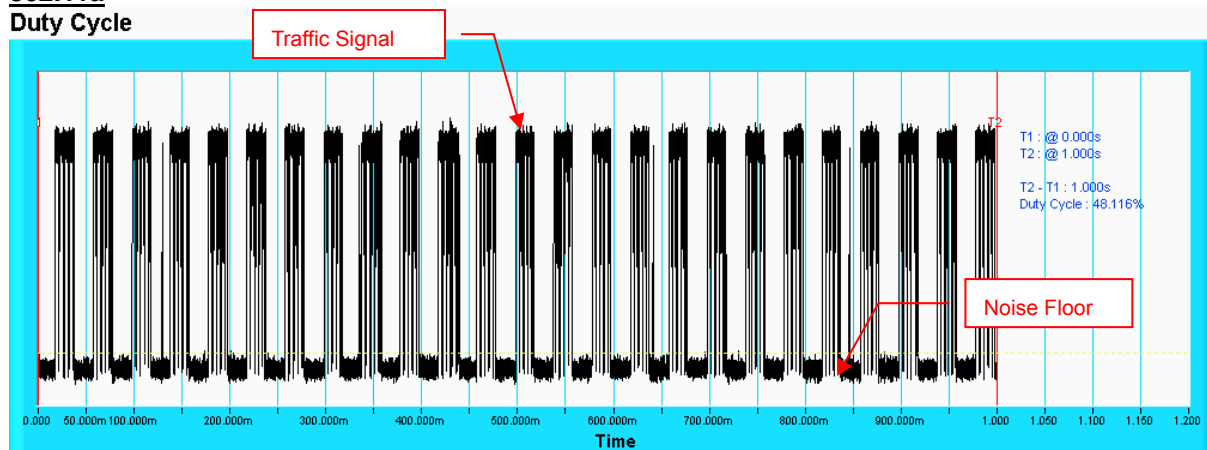


Note: T1 denotes the start of duty cycle period is 0th second. T2 denotes the end of duty cycle period is 1th second. T2 – T1= 1th seconds. Duty Cycle = 48.116%

W56 WLAN TRAFFIC

802.11a

Duty Cycle

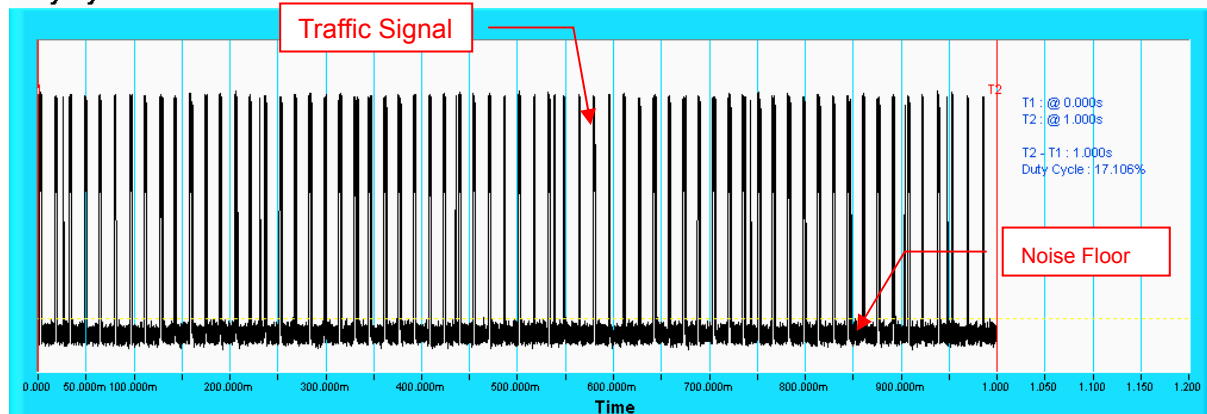

Note: T1 denotes the start of duty cycle period is 0th second. T2 denotes the end of duty cycle period is 1th second. T2 – T1= 1th seconds. Duty Cycle = 17.106%


W53 802.11a

Radar Test Signal	Pulse Repetition Frequency (pps)	Pulse Width (us)	Number of Pulses per Burst	Burst Period (sec)	Minimum Percentage of Successful Detection	Percentage of Successful Detection (%)
DFS-J1-1	700	1	18	15	60%	100%
DFS-J1-2	260	2.5	18	15	60%	100%

W53

DFS-J1-1


Channel Closing Transmission Time & Channel Move Time

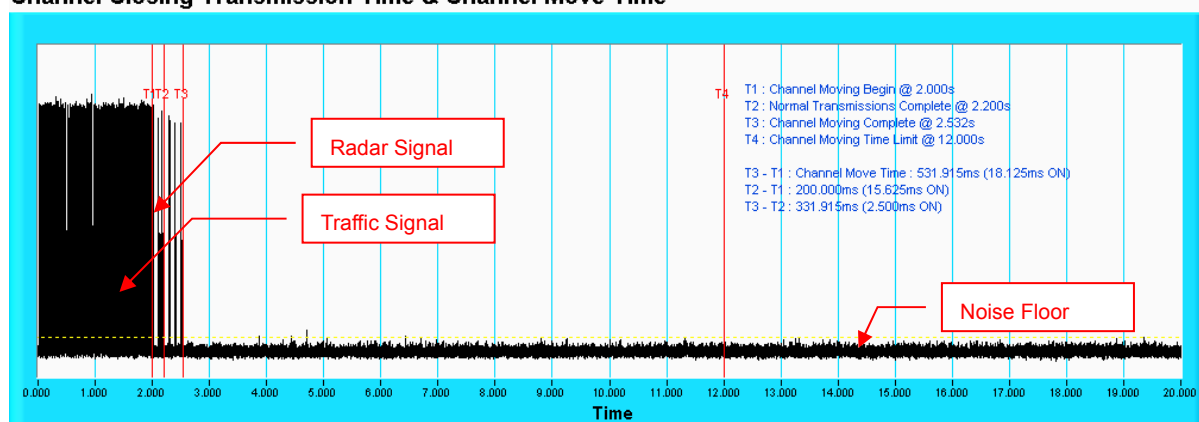

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-J1-2

Channel Closing Transmission Time & Channel Move Time

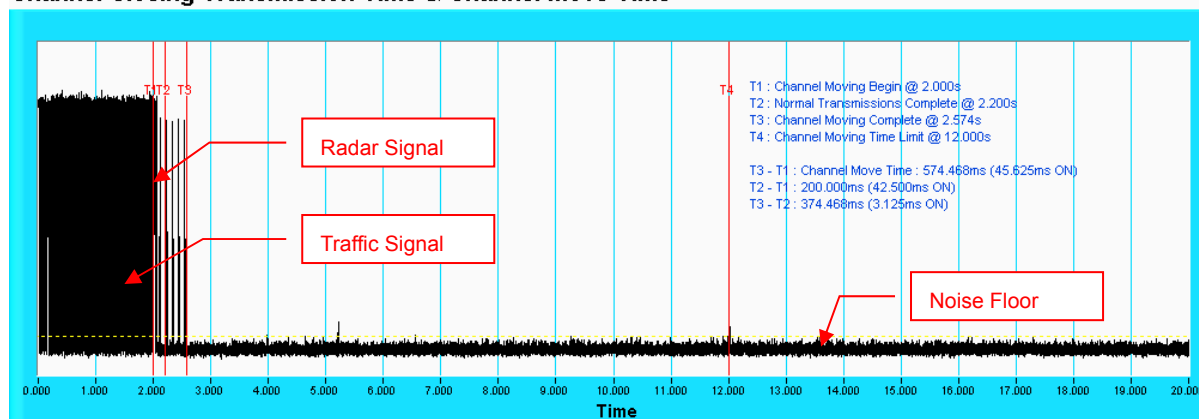

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

W53 802.11a

DFS-J1-1 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5300	Yes
2	5320	Yes
3	5300	Yes
4	5300	Yes
5	5300	Yes
6	5280	Yes
7	5320	Yes
8	5280	Yes
9	5320	Yes
10	5320	Yes
11	5320	Yes
12	5300	Yes
13	5280	Yes
14	5320	Yes
15	5320	Yes
16	5280	Yes
17	5300	Yes
18	5280	Yes
19	5280	Yes
20	5320	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		60%
Result		Pass

W53 802.11a

DFS-J1-2 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5300	Yes
2	5280	Yes
3	5260	Yes
4	5320	Yes
5	5320	Yes
6	5280	Yes
7	5320	Yes
8	5260	Yes
9	5300	Yes
10	5300	Yes
11	5280	Yes
12	5320	Yes
13	5260	Yes
14	5260	Yes
15	5300	Yes
16	5320	Yes
17	5280	Yes
18	5280	Yes
19	5320	Yes
20	5300	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a


Radar Type	Pulse Repetition Frequency (pps)	Pulse Width (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Percentage of Successful Detection (%)
DFS-J2-1	720	0.5	18	60%	100%
DFS-J2-2	250	2	18	60%	100%
DFS-US-1	700	1	18	60%	100%
DFS-US-2	4347 – 6667	1-5	23-29	60%	80%
DFS-US-3	2000 – 5000	6-10	16-18	60%	80%
DFS-US-4	2000 - 5000	11-20	12-16	60%	80%
Aggregate (Radar Types 1-6)				80%	90%

Radar Type	Pulse Repetition Frequency (pps)	Pulse Width (μsec)	Number of Pulses per Burst	Minimum Percentage of Successful Detection	Percentage of Successful Detection (%)
DFS-US-5	500-1000	50 - 100	1-3	80%	100%

Radar Type	Pulse Repetition Frequency (pps)	Pulse Width (μsec)	Pulses per Hop	Minimum Percentage of Successful Detection	Percentage of Successful Detection (%)
DFS-US-6	3000	1	9	70%	95%

DFS-J2-1


Channel Closing Transmission Time & Channel Move Time

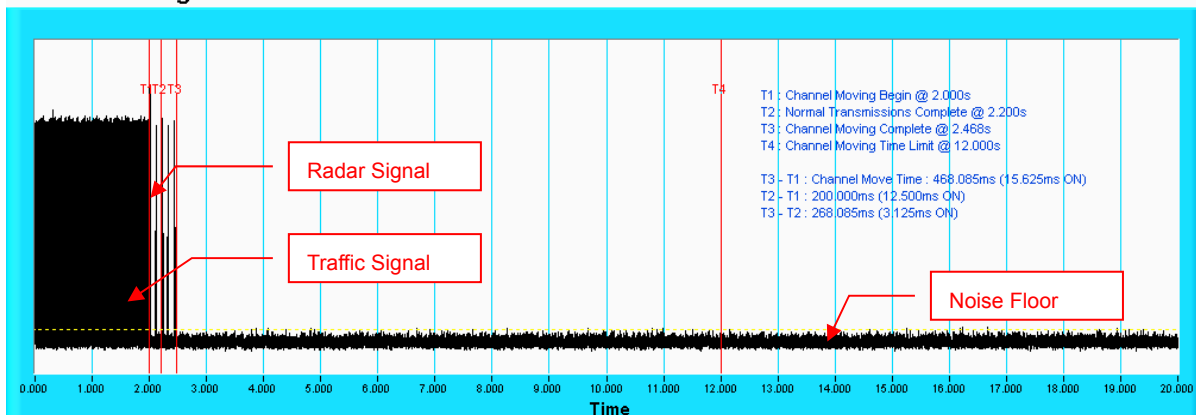

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-J2-2


Channel Closing Transmission Time & Channel Move Time

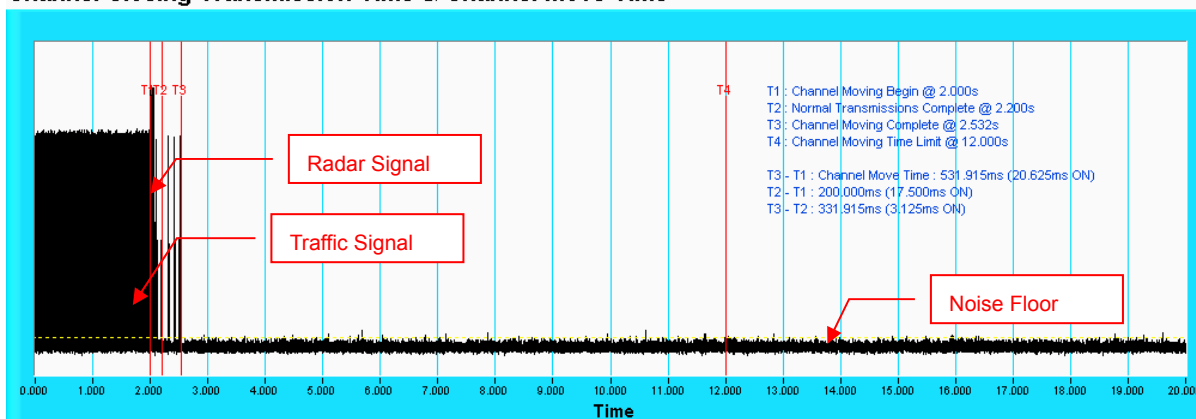

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-US-1


Channel Closing Transmission Time & Channel Move Time

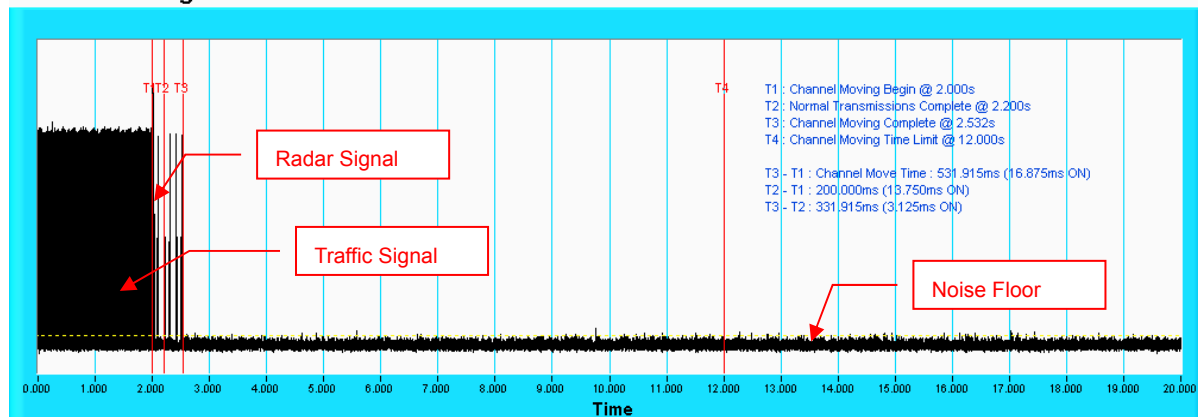

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-US-2


Channel Closing Transmission Time & Channel Move Time

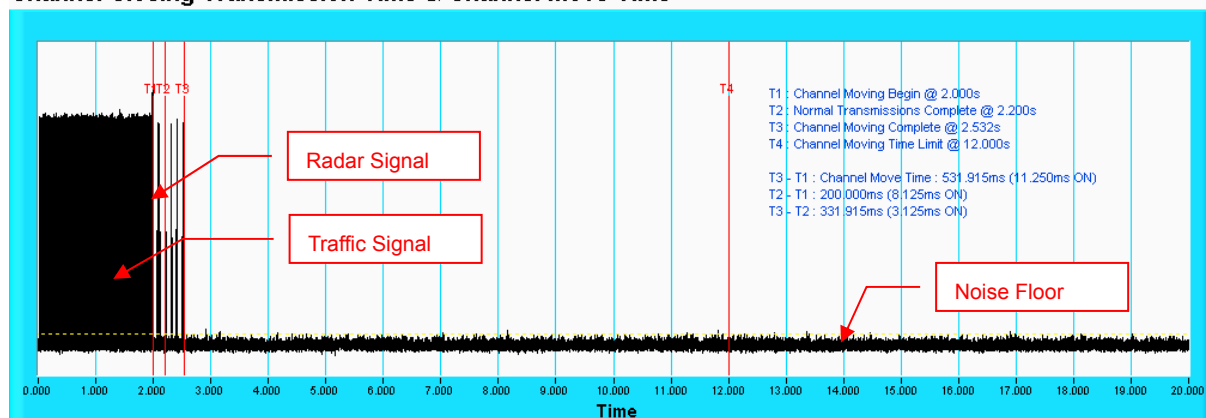

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-US-3


Channel Closing Transmission Time & Channel Move Time

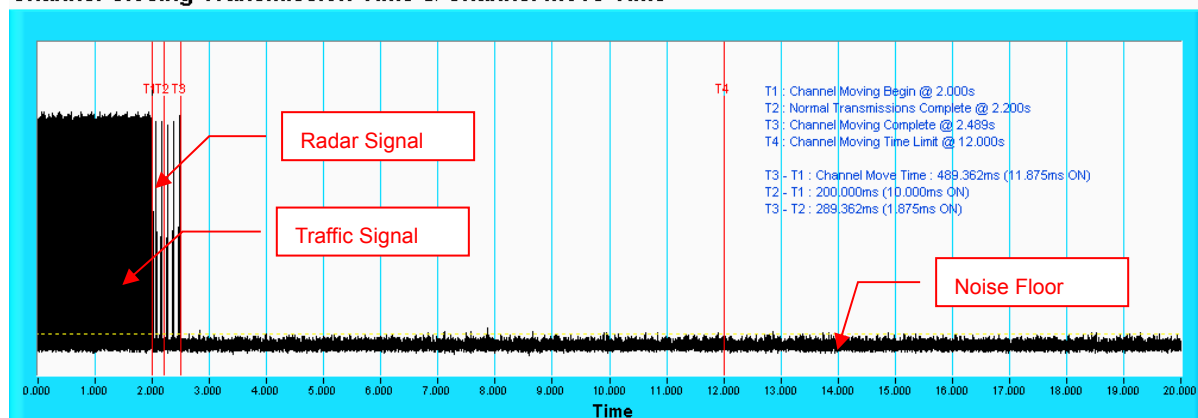

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

DFS-US-4


Channel Closing Transmission Time & Channel Move Time

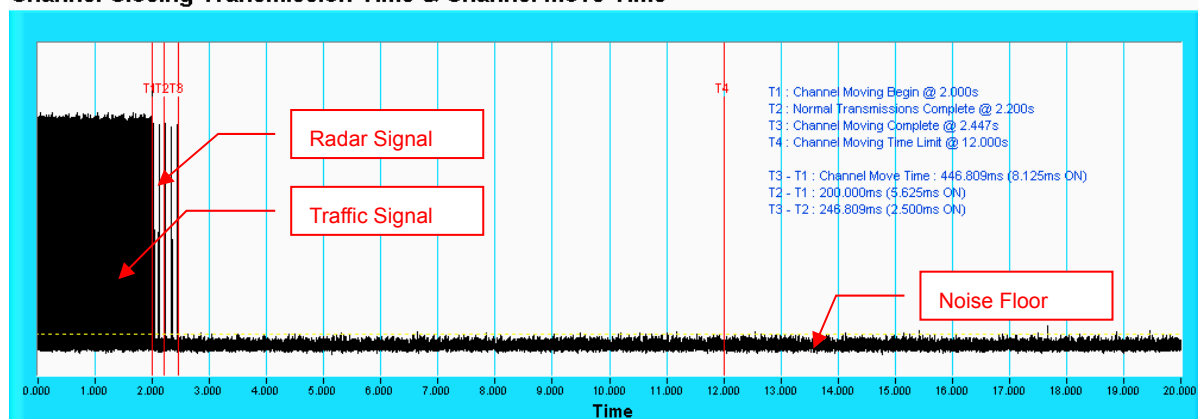

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Long pulse radar signal


Channel Closing Transmission Time & Channel Move Time

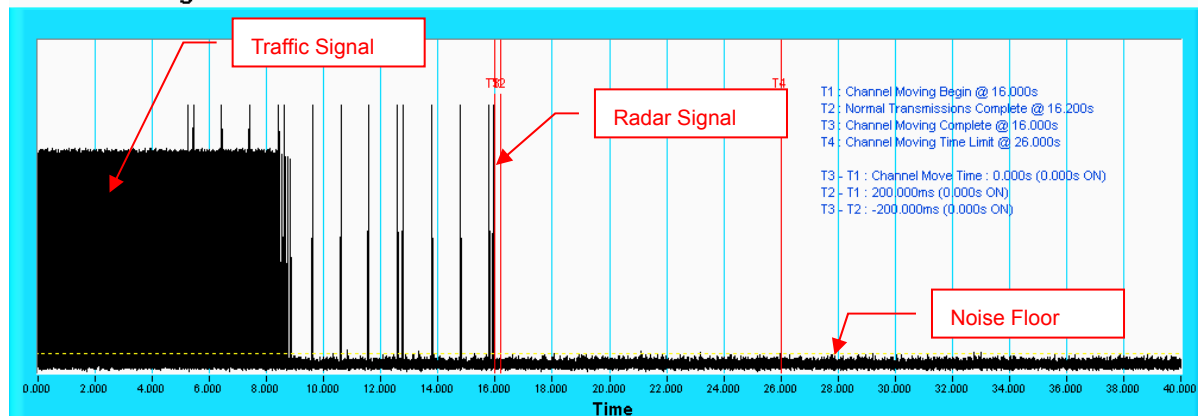

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

Frequency hopping radar signal

Channel Closing Transmission Time & Channel Move Time

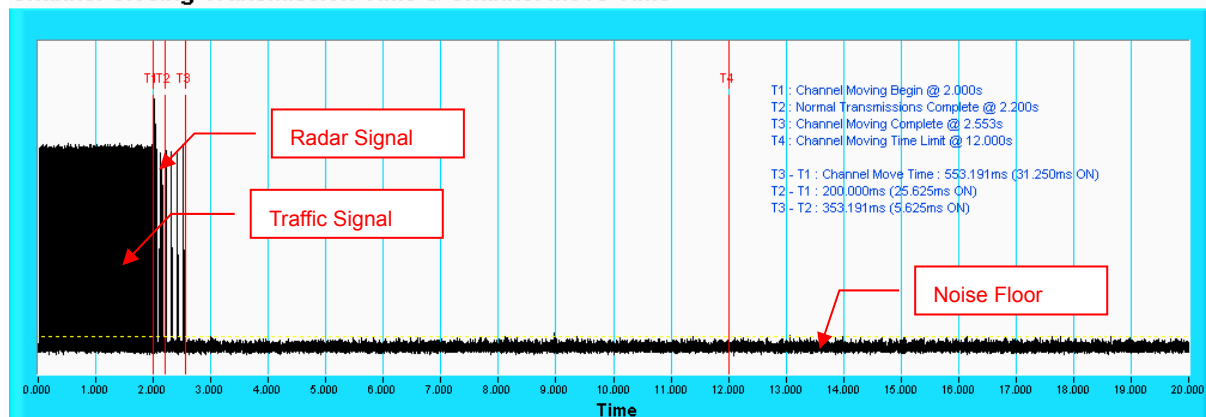

Note: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

W56 802.11a

DFS-J2-1 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5640	Yes
3	5680	Yes
4	5640	Yes
5	5680	Yes
6	5700	Yes
7	5500	Yes
8	5700	Yes
9	5660	Yes
10	5640	Yes
11	5600	Yes
12	5520	Yes
13	5520	Yes
14	5640	Yes
15	5540	Yes
16	5700	Yes
17	5620	Yes
18	5520	Yes
19	5660	Yes
20	5560	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a

DFS-J2-2 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5520	Yes
3	5700	Yes
4	5640	Yes
5	5660	Yes
6	5500	Yes
7	5700	Yes
8	5520	Yes
9	5520	Yes
10	5660	Yes
11	5560	Yes
12	5580	Yes
13	5560	Yes
14	5600	Yes
15	5500	Yes
16	5700	Yes
17	5540	Yes
18	5500	Yes
19	5640	Yes
20	5700	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a

DFS-US-1 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5700	Yes
3	5500	Yes
4	5580	Yes
5	5680	Yes
6	5680	Yes
7	5600	Yes
8	5620	Yes
9	5500	Yes
10	5500	Yes
11	5500	Yes
12	5640	Yes
13	5700	Yes
14	5540	Yes
15	5680	Yes
16	5580	Yes
17	5500	Yes
18	5540	Yes
19	5540	Yes
20	5600	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a

DFS-US-2 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	No
2	5640	Yes
3	5540	Yes
4	5640	Yes
5	5560	Yes
6	5680	Yes
7	5640	Yes
8	5700	Yes
9	5660	No
10	5500	Yes
11	5700	No
12	5700	Yes
13	5560	Yes
14	5580	Yes
15	5560	No
16	5620	Yes
17	5560	Yes
18	5660	Yes
19	5560	Yes
20	5680	Yes
Detection Rate		80%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a

DFS-US-3 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5560	Yes
3	5660	Yes
4	5680	Yes
5	5680	Yes
6	5580	Yes
7	5520	Yes
8	5560	Yes
9	5640	Yes
10	5700	No
11	5540	Yes
12	5640	Yes
13	5620	No
14	5620	No
15	5640	Yes
16	5640	Yes
17	5540	No
18	5600	Yes
19	5540	Yes
20	5640	Yes
Detection Rate		80%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a

DFS-US-4 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5600	Yes
3	5500	No
4	5560	No
5	5560	Yes
6	5520	Yes
7	5600	Yes
8	5660	Yes
9	5600	Yes
10	5540	Yes
11	5680	Yes
12	5680	Yes
13	5500	No
14	5540	Yes
15	5680	Yes
16	5680	Yes
17	5520	Yes
18	5580	No
19	5620	Yes
20	5520	Yes
Detection Rate		80%
Minimum Percentage of Successful Detection		60%
Result		Pass

W56 802.11a


DFS-US-5 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5600	Yes
3	5540	Yes
4	5520	Yes
5	5520	Yes
6	5660	Yes
7	5560	Yes
8	5580	Yes
9	5580	Yes
10	5700	Yes
11	5700	Yes
12	5660	Yes
13	5520	Yes
14	5560	Yes
15	5540	Yes
16	5700	Yes
17	5680	Yes
18	5700	Yes
19	5680	Yes
20	5580	Yes
Detection Rate		100%
Minimum Percentage of Successful Detection		80%
Result		Pass

W56 802.11a

DFS-US-6 Radar Statistical Performances		
Trial #	Channel (MHz)	Channel Closing Transmission Time & Channel move Time
1	5500	Yes
2	5540	Yes
3	5600	Yes
4	5580	Yes
5	5640	Yes
6	5500	Yes
7	5500	Yes
8	5620	Yes
9	5580	Yes
10	5560	No
11	5540	Yes
12	5540	Yes
13	5640	Yes
14	5600	Yes
15	5580	Yes
16	5660	Yes
17	5680	Yes
18	5680	Yes
19	5580	Yes
20	5640	Yes
Detection Rate		95%
Minimum Percentage of Successful Detection		70%
Result		Pass

NON-OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

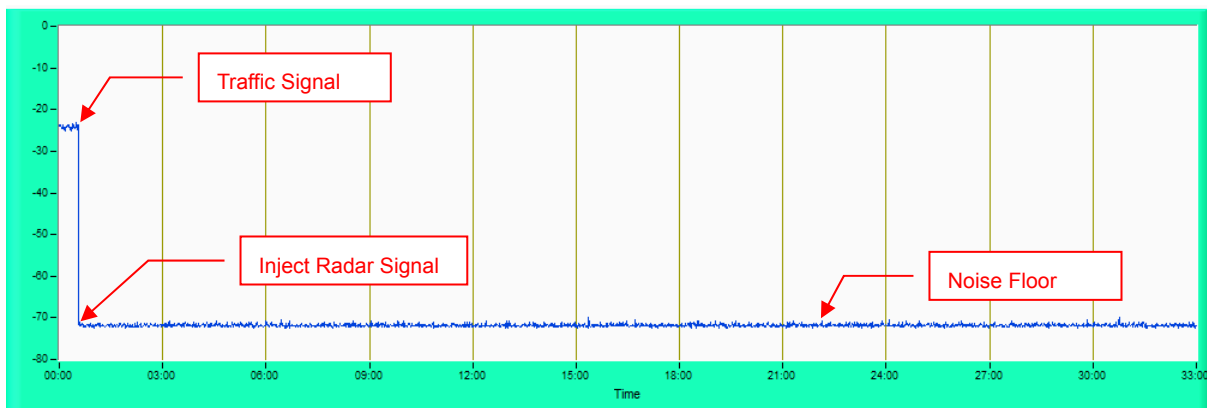

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---