

TEST REPORT

Product : Tablet PC
Trade mark : 
Model/Type reference : ETPad
Serial Number : N/A
Report Number : EED32Q80136703
Date of Issue : Feb. 26, 2024
Product Class : Item 19 of Article 2 Paragraph 1
Test result : PASS

Prepared for:

Acer Gadget Inc.

**7 F.-5, No. 369, Fuxing N. Rd., Songshan Dist.,
Taipei City 105001, Taiwan, China**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

mark.chen

Reviewed by:

Frazer. Li

Approved by:

Mark Chen

Aaron Ma

Date:

Feb. 26, 2024

Aaron Ma

Check No.: 8321290124



1 Version

Version No.	Date	Description
00	Feb. 26, 2024	Original

2 Test Summary

Test	Test Requirement	Limit/Severity	Result
Antenna Requirement	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43,B-1 (1)&(2)	PASS
Test frequency	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43, A-3	PASS
Frequency Error	Item 19 of Article 2 Paragraph 1	±50 PPM or less	PASS
Occupied Bandwidth	Item 19 of Article 2 Paragraph 1	FH/FH+DS/FH+OFDM 83.5MHz or less OFDM : 40MHz or less Others : 26MHz or less	PASS
Spread-spectrum Bandwidth	Item 19 of Article 2 Paragraph 1	500 kHz or more	PASS
Antenna Power	Item 19 of Article 2 Paragraph 1	Designated value: For the 2400-2483.5MHz (1) FH, FH+DS , FH+OFDM: 3mW/MHz(used in the range of 2427-2470.75 MHz) (2) OFDM , DSSS: 10mW/MHz or less OFDM OBW 26-38MHz: 5mW/MHz or less Tolerance: +20%,-80% (3) Other than (1) & (2): 10mW For 2484MHz: 10mW/MHz or less Tolerance: +20%,-80%	PASS
Spurious Emission of Tx	Item 19 of Article 2 Paragraph 1	for 2400-2483.5MHz (1) Below 2387 MHz : 2.5µW/MHz (2) 2387 to 2400 MHz : 25µW/MHz (3) 2483.5 through 2496.5 MHz : 25µW/MHz (4) Over 2496.5 MHz : 2.5µW/MHz	PASS
Interference prevention capability	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43, 44, 45	PASS
Carrier sense capability	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43, 44, 45	PASS
RF accessibility	Item 19 of Article 2 Paragraph 1	Notice 88 Appendix 43, 44, 45	PASS
Spurious Emission of Rx	Item 19 of Article 2 Paragraph 1	(1) Below 1 GHz: -54dBm (2) 1GHz or higher: -47dBm	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means the product in transmitting status.

Rx: In this whole report Rx (or rx) means the product in receiving status.

RF: In this whole report RF means Radiated Frequency.

DS: Direct spreading FH: Frequency hopping

OFDM: Orthogonal frequency division multiplexing.

This report changed the Trade Mark, Model No., Applicant and label. All test data come from the report of No. EED32P81581303.

3 Contents

1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 Client Information	5
4.2 General Description of EUT	5
4.3 EUT Test Environment Recorded	7
4.4 Description of Support Units	7
4.5 Test Location	7
4.6 Measurement Uncertainty (95% confidence levels, k=2)	7
5 EQUIPMENT LIST	8
6 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	9
6.1 Transmitter Requirements	10
6.1.1 EUT test voltage and Frequency	10
6.1.2 Antenna Requirement	13
6.1.3 Frequency Error	14
6.1.4 Occupied Bandwidth (99%)	15
6.1.5 Spread spectrum Bandwidth (90%)	16
6.1.6 Antenna Power	17
6.1.7 Spurious Emissions of Tx	18
6.1.8 Carrier sense capability	19
6.1.9 Interference prevention function	21
6.1.10 RF accessibility	22
6.2 Receiver Requirements	23
6.2.1 Spurious Emissions of Rx	23
7 PHOTOGRAPHS	24
7.1 EUT Test Setup	24
7.2 EUT Constructional Details	25

4 General Information

4.1 Client Information

Applicant:	Acer Gadget Inc.
Address of Applicant:	7 F.-5, No. 369, Fuxing N. Rd., Songshan Dist., Taipei City 105001, Taiwan, China
Manufacturer:	CHUWI Innovation And Technology (ShenZhen)co.,Ltd.
Address of Manufacturer:	F2, Building 3, Li jincheng Industrial Park, Industrial east Road, Longhua Street, Longhua District, ShenZhen City, China
Factory:	Shenzhen Yuko Technology Co., Ltd
Address of Factory:	4/F-B, Building A4, 4/F-A, Building A4, 6/F, Building A4, 6/F-A, Building A9, 4/F, Building A9, TianRui Industrial Park, No.35, FuYuan 1st Road, Zhancheng Community, Fuhai Street, Baoan DistrictShenzhen City, Guangdong Province, P.R. China

4.2 General Description of EUT

Product Name:	Tablet PC	
Model No.(EUT):	ETPad	
Trade mark:		
Operating Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2472MHz IEEE 802.11n(HT40): 2422MHz to 2462MHz	
Rate power:	802.11b: 5.00mW/MHz 802.11g: 3.90mW/MHz 802.11n (HT20): 3.60mW/MHz 802.11n (HT40): 2.90mW/MHz	
Number of Channels:	802.11b: 13 Channels 802.11g: 13 Channels 802.11n (HT20): 13 Channels 802.11n (HT40): 9 Channels	
Type of Modulation:	IEEE for 802.11b:DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g:OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40): OFDM (64QAM, 16QAM,QPSK,BPSK)	
Transmit Data Rate:	802.11b: 1M/2M/5.5M/11M bps 802.11g: 6M/9M/12M/18M/24M/36M/48M/54M bps 802.11n(HT20): 6.5M/13M/19.5M/26M/39M/52M/58.5M/64M bps 802.11n(HT40): 13.5M/27M/40.5M/54M/81M/108M/121.5M/135M bps	
Channel Separation:	5 MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	0.23dBi	
Function:	<input checked="" type="checkbox"/> SISO <input type="checkbox"/> 2x2 MIMO <input type="checkbox"/> TPC	
Test Power Grade:	Default	
Test Software of EUT:	N/A	
Power Supply:	Adapter	Model:UC13US Input:100-240V~50/60Hz Output:5.0V---2000mA
Test Voltage:	Battery DC 3.85V	

Sample Received Date:	Oct. 07, 2023
Sample tested Date:	Oct. 07, 2023 to Nov. 08, 2023

4.3 EUT Test Environment Recorded

Temperature:	23°C
Humidity:	54% RH
Atmospheric Pressure:	1010mbar

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

4.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Frequency Error	10 Hz
2	Occupied Bandwidth	10 kHz
3	Antenna Power	0.55dB
4	Spurious Emissions	0.46dB(30MHz-1GHz)
		0.55dB(1GHz-18GHz)
5	Carrier sense capability	1.0dB
6	Temperature test	0.64°C
7	Humidity test	3.8%
8	DC and low frequency voltages test	0.026%

5 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-23-2022	12-22-2023
Signal Generator	Keysight	N5182B	MY53051549	12-19-2022	12-18-2023
Signal Generator	Agilent	N5181A	MY46240094	12-19-2022	12-18-2023
DC Power	Keysight	E3642A	MY56376072	12-19-2022	12-18-2023
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	06-09-2023	06-08-2024
RF control unit	JS Tonscend	JS0806-2	158060006	12-23-2022	12-22-2023
Communication test set	R&S	CMW500	120765	12-23-2022	12-22-2023
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	12-19-2022	12-18-2023
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-01-2023	05-31-2024
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992).
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c).

From JRL Article 24-2, paragraph 4, Item 2

Notice: Calibration duration for above equipment is 1 year.

6 Radio Technical Requirements Specification

Table 1: Radio Technical Requirements Specification for 2.4 GHz band wide-band low-power data communication system (Item 19 of Article 2 Paragraph 1)

Items	Technical standard
Assigned frequency or designated frequency	2400-2483.5MHz
Communication method	One-way communication, simplex, semi-duplex, or duplex operation of digital signal transmission including spread spectrum
Tolerance of frequency ($\times 10^{-6}$)	± 50 PPM
Tolerance of occupied bandwidth	FH: 83.5MHz or less FH + DS: 83.5MHz or less FH + OFDM: 83.5MHz or less OFDM: 38MHz or less Others: 26MHz or less
Antenna power	Designated value (1) FH, FH+DS, FH+OFDM: 3mW/MHz (used in the range of 2427 - 2470.75 MHz) (2) OFDM, DS other than (1): 10mW/MHz (3) Other than (1) & (2): 10mW Tolerance: +20%, -80%
Antenna gain	1) 12.14 dBi or less in principle 2) In case of directional antenna (1) FH, FH+DS or FH+OFDM using 2427-2470.75 MHz EIRP \leq 16.91 dBm/MHz (2) OFDM or DS other than (1) EIRP \leq 22.14 dBm/MHz (3) Other than (1) and (2): 22.14 dBm or less (4) OFDM OBW 26 - 38MHz: 19.14dBm/MHz (5) Half-power angle of directional antenna (e) in case of the item 2): $e \leq 360/A$ (The A is 10 in maximum.)
Tolerance of spurious emission intensity	for 2400-2483.5Mz (1) Below 2387 MHz : 2.5 μ W (2) 2387 to 2400 MHz : 25 μ W (3) 2483.5 through 2496.5 MHz : 25 μ W (4) Over 2496.5 MHz : 2.5 μ W
Spreading bandwidth	500kHz or more
Spreading rate of spectrum	For DS system; (Spreading bandwidth) / (Frequency corresponding to transmission rate) \geq 5
Limit of secondary radiated emissions	(1) Below 1 GHz: 4nW (2) 1 GHz or higher: 20nW
Interference prevention function	Shall have the function of automatic transmission and reception of identification sign.
Structure	Shall be of the structure that the RF and modulator sections excluding antenna cannot easily be opened.
Note	DS: Direct spread FH: Frequency hopping OFDM: Orthogonal frequency division multiplexing

Note: The Technical Standards described here do not cover all of the regulated items.

6.1 Transmitter Requirements

6.1.1 EUT test voltage and Frequency

6.1.1.1 EUT test voltage

Power Supply:	Adapter	Model:UC13US Input:100-240V~50/60Hz Output:5.0V---2000mA
Test voltage require:	Supply the rated voltage and the rated voltage $\pm 10\%$ to power supply. However, If the fluctuation of input voltage to the circuit of RF unit (except power supply) of test equipment is under $\pm 1\%$, when input voltage from external power supply to the test equipment is fluctuated by $\pm 10\%$: Conduct the test with the rated voltage only.	
RF circuit test points:		

Power Supply result:	The measurement result of the voltage fluctuation at RF circuit when DC 3.85V +/- 10%.	
	DC Input	RF circuit
	3.850V	DC 1.850V
	3.465V	DC 1.850V
	4.235V	DC 1.850V
NT: Normal Temperature NV: Normal Voltage LV: Low Voltage HV: High Voltage		

6.1.1.2 Test frequency

Test frequencies:	If the EUT can be set to 3 or more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L,M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.	
Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom

EUT channels and frequencies list:

802.11b

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
12	2467
13	2472

Test frequencies are the lowest channel: 1 channel(2412MHz), middle channel: 7 channel(2442 MHz) and the highest channel: 13 channel(2472 MHz)

802.11g&n (HT20)

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
12	2467
13	2472

Test frequencies are the lowest channel: 1 channel(2412MHz), middle channel: 7 channel(2442 MHz) and the highest channel: 13 channel(2472 MHz)

802.11n (HT40)


Channel	Frequency (MHz)
1	2422
2	2427
3	2432
4	2437
5	2442
6	2447
7	2452
8	2457
9	2462

Test frequencies are the lowest channel: 1 channel(2422MHz), middle channel: 5 channel(2442 MHz) and the highest channel: 9 channel(2462 MHz).


6.1.2 Antenna Requirement

Standard requirement	
Applicable for equipment with an antenna terminal, including testing terminals) If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.	
EUT Antenna	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.23dBi.	
Result: An antenna connector is available, all relevant tests will be carried out conducted.	

6.1.3 Frequency Error

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Enter the unmodulation mode for the product. Test in Channel lowest, middle and highest, keep in continuously transmitting status.
Test Configuration:	 <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre>
Test Conditions:	Frequency Counter or Spectrum Analyzer is used for measurement.
EUT conditions:	Modulation/Spread/Hopping off, CW Tx If EUT does not accept "Modulation OFF" mode in the measurement, you may use "Modulation ON" mode. In that case you can use the Max power Frequency as the measuring results.
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 1MHz RBW 10KHz (Modulation OFF), VBW 10KHz (Modulation OFF), Sweep Time Auto Detector mode Positive peak Indication mode Max hold
Technical standard:	Tolerance of frequency: $\pm 50 \times 10^{-6}$
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703

6.1.4 Occupied Bandwidth (99%)

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	<div style="text-align: center;">  <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre> </div>
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 40MHz/80MHz (DSSS,OFDM) RBW 300 kHz VBW 300 kHz Sweep Time Auto detector mode Positive peak Indication mode Max hold OBW 99%
Technical standard:	OFDM : 38MHz or less Others : 26MHz or less
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703


6.1.5 Spread spectrum Bandwidth (90%)

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	<div style="text-align: center;">  <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre> </div>
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.
Spectrum Analyzer conditions:	Frequency: Test Frequency Span 40MHz/80MHz (DSSS,OFDM) RBW 300kHz VBW 300kHz Sweep Time Auto detector mode Positive peak Indication mode Max hold OBW 90%
Technical standard:	500kHz or more
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703

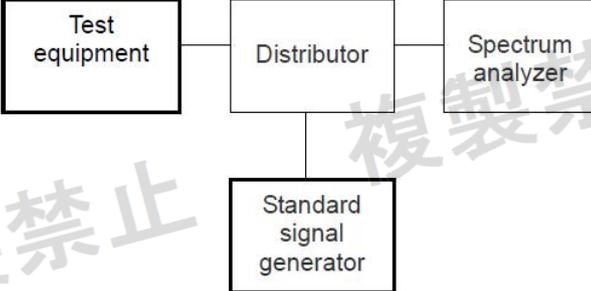
6.1.6 Antenna Power

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	<div style="text-align: center;">  <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre> </div>
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.
Spectrum Analyzer conditions(FHSS):	Frequency: Test Frequency Span 40 MHz/80 MHz (DSSS,OFDM) RBW 1 MHz VBW 1 MHz Sweep Time Auto detector mode Positive peak Indication mode Max hold
Technical standard:	Antenna Power (1) FH, FH+DS , FH+OFDM 3mW/MHz or less (used in the range of 2427 - 2470.75 MHz) (2) OFDM , DS other than (1) 10mW/MHz or less (3) Other than (1) & (2) 10mW or less Tolerance: +20% -80%
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703

6.1.7 Spurious Emissions of Tx

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	<div style="text-align: center;">  <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre> </div>
EUT conditions:	Modulation/Spread/Hopping on, PN9 Modulation Tx For equipment using diffusion code, set to the test diffusion code and modulate with standard coding test signal.
Measurement Procedure:	Step1 All spurious are measured from 30MHz to 13GHz by peak mode. Step2 IF the value measured by Step1 is 2dB or less, measure in average mode.
Spectrum Analyzer conditions(Step 1):	Frequency: 30MHz –13GHz RBW 100kHz (30 – 1GHz), 1000KHz (over 1GHz) VBW 100kHz (30 – 1GHz), 1000KHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold
Spectrum Analyzer conditions(Step 2):	Frequency: Spurious Frequency Span 0Hz RBW 1MHz VBW 1MHz Sweep Time Auto Detector mode Sample Indication mode Max hold
Technical standard:	for 2400-2483.5MHz (1) Below 2387 MHz : 2.5μW/MHz (2) 2387 to 2400 MHz : 25μW/MHz (3) 2483.5 through 2496.5 MHz : 25μW/MHz (5) Over 2496.5 MHz : 2.5μW/MHz
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703

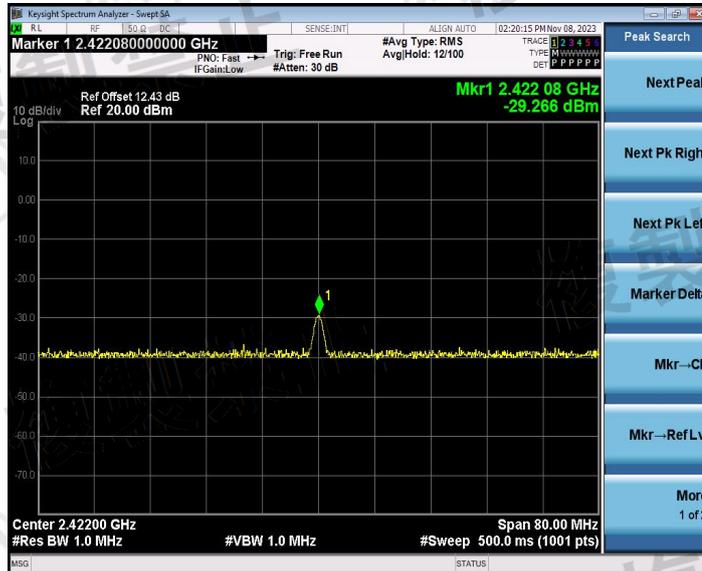
6.1.8 Carrier sense capability

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	The EUT state shall be "normal mode link with wireless router"
Test Configuration:	 <pre> graph LR T[Test equipment] --- D[Distributor] D --- SA[Spectrum analyzer] SG[Standard signal generator] --- D </pre>
Measurement Procedure:	<ol style="list-style-type: none"> 1. SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is $(on\ 22.79+G-20*\log(f)dBm)$ (G is the antenna gain, f is the test frequency). 2. Turn off the RF signal of the SG. 3. EUT have transmitted the maximum modulation signal and fixed channelize. 4. Setting of SA: RBW/VBW=1MHz/1MHz, Span= 50MHz, Sweep time= auto, Sweep mode= continuous, Detect mode=positive peak 5. SG RF signal on, 6. Record the result, 7. SG RF signal off, 8. Record the result.
Technical standard:	EUT shall be stop the transmitted any signal and SG RF signal off. Note: It is not applicable to occupied bandwidth within 26MHz.
Test result:	The unit does meet the requirements (Good).

Result plot as follows:

OFDM mode with 13.5Mbps data rate
802.11n (HT40)


Channel 3: 2.422 GHz:



6.1.9 Interference prevention function

1) Measurement system diagram

(1) When transmitting identification code



2) Condition of measuring instrument

(1) Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.

3) Condition of test equipment The mode of normal use.

4) Measuring operation procedure

(1) When test equipment has the function to transmit identification code automatically:

A) Transmit the predetermined identification code from test equipment.

B) Confirm the transmitted identification code by demodulator.

00:27:15:16:65:4f

5) Test result: The unit does meet the requirements (Good).

Test result: PASS

6.1.10 RF accessibility

Standard requirement


Article 49-20, paragraph 1 (a)

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

<input type="checkbox"/> Sealed with special screws.
<input type="checkbox"/> Plastic chassis is being welded using ultrasonic waves.
<input type="checkbox"/> Chassis is glued using a special adhesive.
<input type="checkbox"/> Metal covers are spot-fused.
<input type="checkbox"/> Cover is specially interlocked.
<input checked="" type="checkbox"/> RF and Modulation components are covered with shielding case and this shielding case is soldered.
<input type="checkbox"/> Shield case is welded at RF and modulation parts, and ID-ROM is welded using the BGA Method.
<input type="checkbox"/> Shield case is welded at RF and modulation parts, and ID-ROM is glued at its lead with a special adhesive.
<input type="checkbox"/> Shield case is welded at RF and modulation parts, and ID-ROM is glued with anon-transparent laminating agent.
<input type="checkbox"/> RF and Modulation parts are mounted on PCB with surface mount technology, the antenna is printed on PCB, chip is welded on PCB, and there is no any adjustable parts on PCB or adjustable parts are not exposed. The interval of terminals: 0.5 mm Number of terminals: 33

6.2 Receiver Requirements

6.2.1 Spurious Emissions of Rx

Test Requirement:	Item 19 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.43
EUT Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test Configuration:	<div style="text-align: center;">  <pre> graph LR EUT[EUT] --> SA[Spectrum Analyzer] </pre> </div>
EUT conditions:	Rx
Measurement Procedure:	Step 1 All spurious are measured from 30 MHz to 13 GHz by peak mode. Step 2 IF the value measured by Step1 is 2 dB or less, measure in average mode.
Spectrum Analyzer conditions(Step 1):	RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Positive peak Indication mode Max hold
Spectrum Analyzer Conditions(Step 2):	Frequency: Spurious Frequency Span 0 Hz RBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) VBW 100 kHz (30 – 1GHz) , 1 MHz (over 1GHz) Sweep Time Auto detector mode Sample Indication mode Max hold
Technical standard:	(1) Below 1 GHz : 4 nW or less (2) 1 GHz and over : 20 nW or less
Test result:	Refer to Appendix: 2.4G WIFI of Report No. EED32Q80136703