



Temperature	24.5	Humidity	54.4%
Test Engineer	Diamond Lu	Test Voltage	Nominal Voltage
Worst Test Mode	802.11n(HT40): Channel 38		

Test Plot of Secondary Radiated Emissions

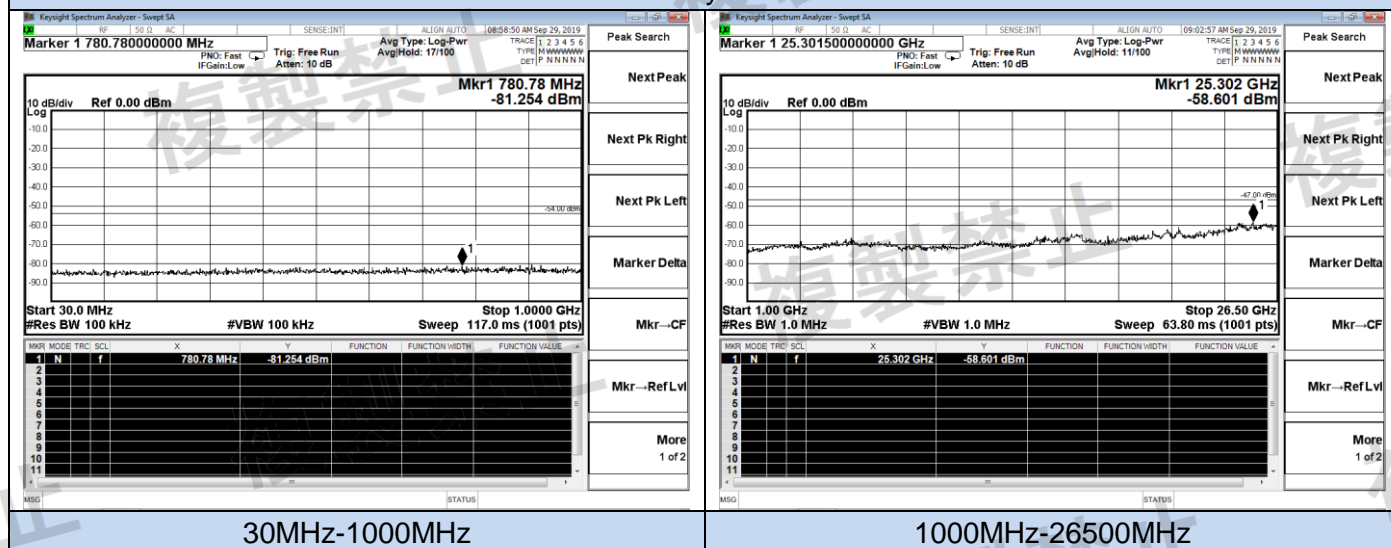


Temperature	24.5	Humidity	54.4%
Test Engineer	Diamond Lu	Test Voltage	Nominal Voltage
Worst Test Mode	802.11ac(VHT20): Channel 40		

Test Plot of Secondary Radiated Emissions

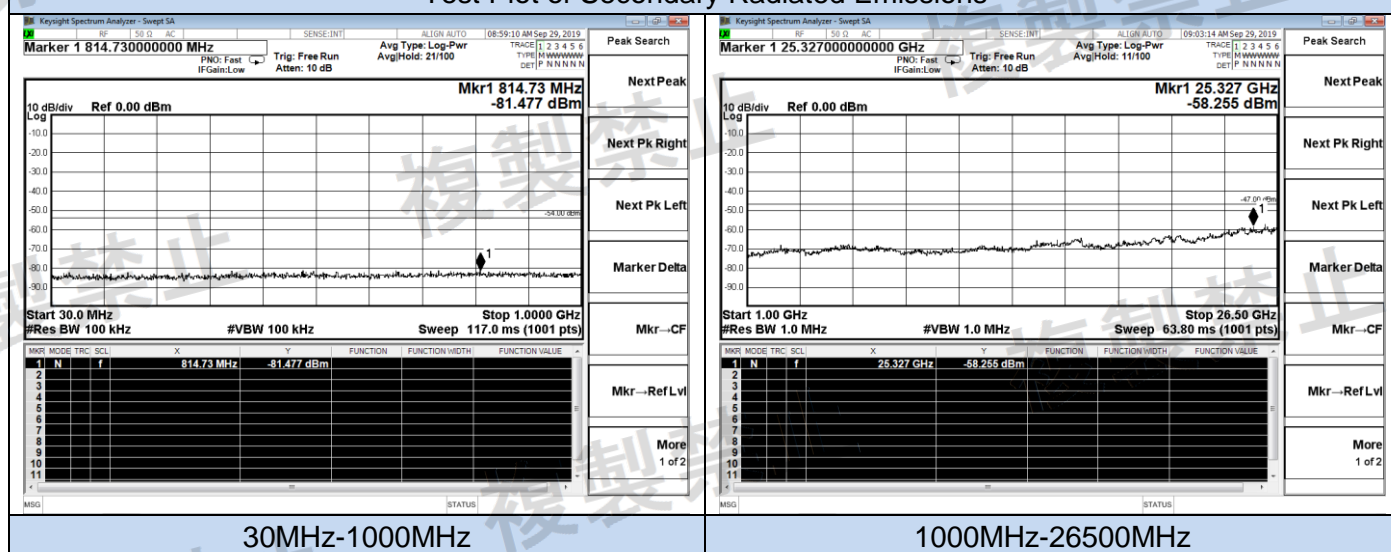


Temperature	24.5	Humidity	54.4%
Test Engineer	Diamond Lu	Test Voltage	Nominal Voltage
Worst Test Mode	802.11ac(VHT40): Channel 38		

Test Plot of Secondary Radiated Emissions

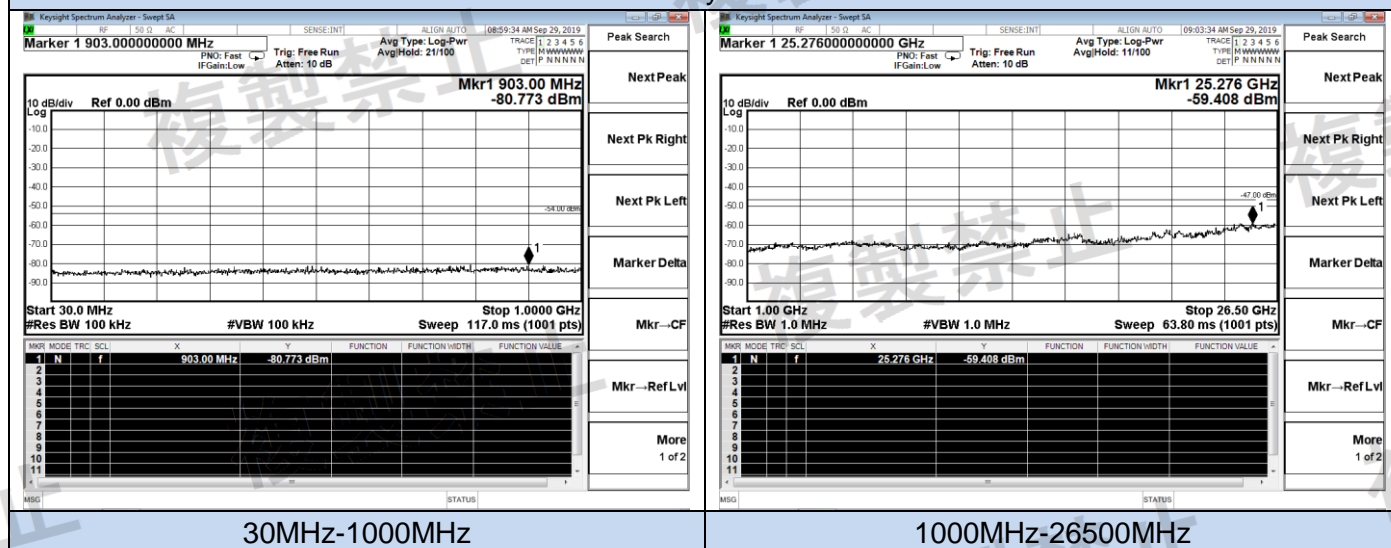

Temperature	24.5	Humidity	54.4%
Test Engineer	Diamond Lu	Test Voltage	Nominal Voltage
Test Mode	802.11ac(VHT80): Channel 42		

Test Plot of Secondary Radiated Emissions

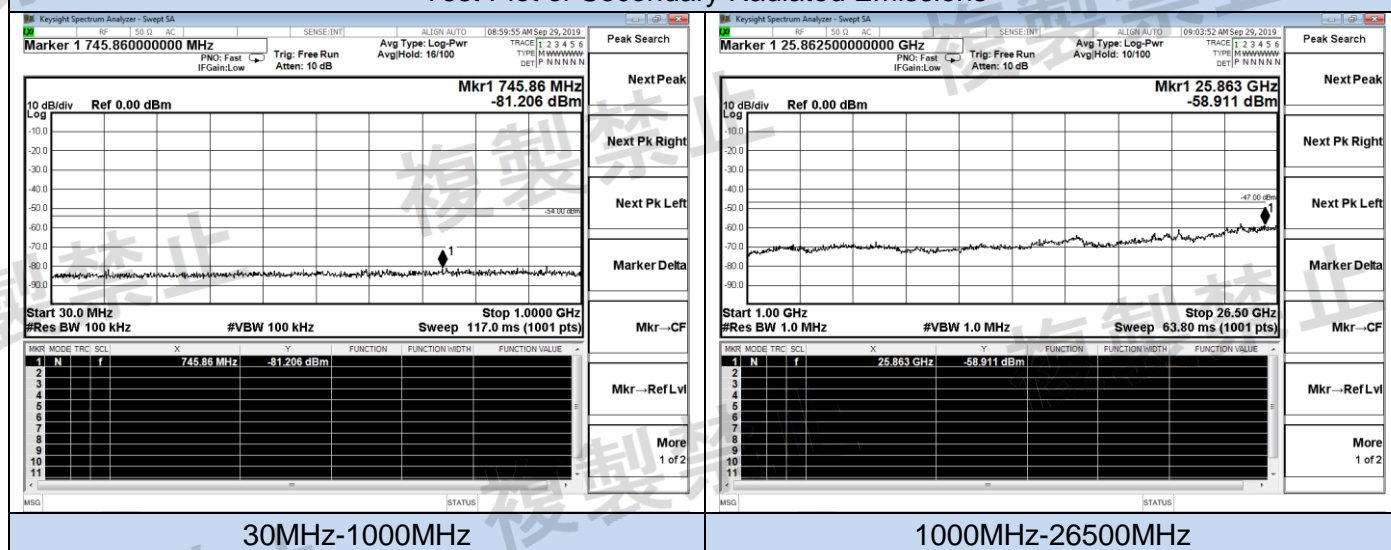

6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photographs of the EUT.

7. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photographs of the EUT.

8. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photographs of the EUT.

9. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2019-06-11	2020-06-10
2	Power Sensor	R&S	NRV-Z81	100458	2019-06-11	2020-06-10
3	Power Sensor	R&S	NRV-Z32	10057	2019-06-11	2020-06-10
4	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2018-11-15	2019-11-14
5	DC Power Supply	Agilent	E3642A	N/A	2018-11-15	2019-11-14

Note: All equipment is calibrated through China Electronic Product Reliability and Environmental Testing Research Institute and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

-----THE END OF REPORT-----