

TEST REPORT

Report number: DRTTEC1810-0160(1)

Issue Date: Oct 15, 2018

Applicant	: Bluebird Inc. (Dogok-dong, SEI Tower 13,14)39, Eonjuro30-gil, Seoul, South Korea
Equipment under test	: Enterprise Full Touch Handheld Computer
Model Name	: EF401
Date of Test	: 2018-08-06 ~ 2018-08-22
Test Place	: DT&C Co., Ltd. 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935
Test Results	: PASS (Refer to attachment)

The results in this reports are applicable only to the samples tested.

This report shall not be re-produced except in full without the written approval of
DT&C Co., Ltd.

Test Engineer;

MyungHoon Lee

Approval Person;

Geunki Son

1. Summary of Test

1. Purpose of test

Ordinance on Technical Standards Conformity Certification of Specified Radio Equipment
2.4GHz Band wide band low power data communication System

2. Standards

Certification Ordinance Article 2 Clause 1 Item19

1) Test Methods

Ministry of Internal Affairs and Communications Notification Article 88 Appendix 43

2) Deviation from standards

None

3. List of applied test to the EUT

Article 88 Appendix 43	Classification of EUT	Condition	Result
1	Voltage fluctuation	Conducted	PASS
3	Frequency Tolerance	Conducted	PASS
4	Occupied Bandwidth	Conducted	PASS
4	Spread Bandwidth	Conducted	N/A
5	Unwanted (Spurious) Emission Strength	Conducted	PASS
6	RF Output Power Tolerance	Conducted	PASS
7	Secondary Emitted Radio Wave Strength	Conducted	PASS
8	Carrier Sensing Function (1)	Conducted	N/A
9	Carrier Sensing Function (2)	Conducted	N/A
10	Absolute Gain of Transmission Antenna	Conducted	N/A
11	Angle Width of Principal Radiation from Transmission Antenna	Conducted	N/A
12	Interference Prevention Function	Conducted	PASS
13	Hopping frequency dwell time	Conducted	N/A

1) Test set up

Table-Top

2) Modification to the EUT by laboratory

None

2. Test Information

1. Applicant

Bluebird Inc.

2. Equipment under test

Enterprise Full Touch Handheld Computer

3. Model number

EF401

4. Serial number

Identical prototype

5. Size

(W) 68 x (D) 15.9 x (H) 136.3 mm

6. Terminal limitation

- 10 °C ~ + 50 °C

7. RF Specification Frequency range

2412-2472MHz

8. Number of RF Channels

13 Channels

9. Modulation method & Data rate

Direct Sequence Spread Spectrum

(1Mbps: DBPSK, 2Mbps: DQPSK, 5.5/11Mbps: CCK)

Frequency equal to the transmission rate of the modulation signal

1MHz(case of 1/2Mbps) 1,375MHz(case of 5.5/11Mbps)

Orthogonal Frequency Division Multiplexing

(6/9Mbps: OFDM-BPSK, 12/18Mbps: QPSK, 24/36Mbps: 16QAM, 48/54Mbps: 64QAM)

The number of sub carrier: 52(A pilot is in sub carrier of these)

HT20: Orthogonal Frequency Division Multiplexing

(Up to 72.2Mbps)

10. Variation of the family model(s)

None

3. Configuration of equipment

1. Frequency tolerance, RF output power tolerance, Occupied Bandwidth
Unwanted(Spurious) emission strength, Secondary emitted radio wave strength



4. Test Result

Environment of Test Room	Test Date	2018-08-06 ~ 2018-08-22
	Temperature	20 ~ 25 °C
	Humidity	45 ~ 48 %

Peak Antenna Gain	0.823	dBi
Declaration Output Power	1.851	mW/MHz
Declaration Output Power	2.6741	dBm/MHz
E.I.R.P.	3.4971	dBm/MHz
Input Power Voltage	3.80	VDC

Tested Circuit Insertion Loss		0	dB
Frequency equal to the Transmission rate		1.375	MHz
Transmission Time	ON TIME	1.364	ms
	OFF TIME	0.198	ms
	Ratio	87%	%
Packet Type (Mode)		Not Applicable	mode
Transmit Speed		Not Applicable	MHz

Test Category; Radio Equipment of Specified Low-Power Radio Station for IEEE802.802.11 g (HT 20)

The reason why the tests are performed only at rated voltage:

When the input voltage to receiver RF circuit varies below $\pm 1\%$ as the input voltage from the external power supply to the receiver varies $\pm 10\%$ (excluding power supply).

Measurement Frequency		MHz	2412	2442	2472	Result	Limit	Note
Channel Number		Ch.	1	7	13	---	---	
Reading Frequency		MHz	2412.008656135	2442.007864602	2472.008054832	---	---	
Frequency Tolerance		ppm	3.58878	3.22056	3.25843	PASS	$\pm 50 \times 10^{-6}$ (50ppm)	
Occupied Bandwidth		MHz	17.124	17.053	16.891	PASS	26MHz or below	
Spread Bandwidth		MHz	-	-	-	N/A	500kHz or more	
RF Output Power		mW/MHz	1.320890	1.351658	1.293799	PASS	10mW/MHz or below	
RF Output Power Tolerance		%	-28.639113	-26.976904	-30.102726	PASS	+20 to -80%	
Tx Spurious Emission Strength	30 to 2387MHz	uW/MHz	0.009141	0.002323	0.002773	PASS	2.5uW/MHz or below	
		MHz	2384.6	2384.6	2368.1	-----		
	2387 to 2400MHz	uW/MHz	14.791084	0.030019	0.012954	PASS	25uW/MHz or below	(Ch1)RBW, VBW: 30kHz
		MHz	2399.831	2389.795	2399.194	-----		+15.23dB
	2483.5 to 2496.5MHz	uW/MHz	0.007249	0.015262	12.050359	PASS	25uW/MHz or below	(Ch13)RBW, VBW: 30kHz
		MHz	2484.059	2483.669	2483.565	-----		+15.23dB
	2496.5 to 12500MHz	uW/MHz	0.005153	0.004461	0.001035	PASS	2.5uW/MHz or below	
		MHz	12270	7448	2506	-----		
Rx Spurious Emission Strength	10 to 1000MHz	nW	0.006243	0.005794	0.005995	PASS	4nW or below	
		MHz	918.82	657.46	961.39	-----		
	1000 to 5000MHz	nW	0.113058	0.116145	0.125545	PASS	20nW or below	
		MHz	2940	3152	3148	-----		
	5000 to 12500MHz	nW	0.273590	0.191293	0.210669	PASS	20nW or below	
		MHz	9650.0	12275.0	9890.0	-----		
Interference Prevention Function		-----	Good	Good	Good	PASS		

Equipment	Company





複製禁止

Note2: 較正期限は、較正を行った日の翌月から起算して1年以内です。
The validity of measurement equipment is one year from the first day of the following month of the calibration date.

複製禁止


6. Uncertainty

Parameter	Uncertainty
Total RF power conducted	0.88 dB
Spurious emissions conducted	0.92 dB
Temperature	0.4 C
Humidity	2%

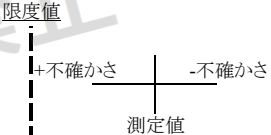判定	測定データにおける不確かさの判断とその範囲	
適合	例 A  <p>測定結果と不確かさは与えられた限度値内に入っています。これを『適合』と呼びます。</p>	
	例 B  <p>完全には、限度値内でも限度値外でもありません。この場合の適合性については、確実な結論を出すことは出来ません。</p>	
不適合	例 C  <p>完全には、限度値内でも限度値外でもありません。この場合の適合性については、確実な結論を出すことは出来ません。</p>	
	例 D  <p>測定結果も不確かさも与えられた限度値内に入っていません。これは『不適合』と呼びます。</p>	

7. Configuration Photographs

Conducted Measurement Photo(1)

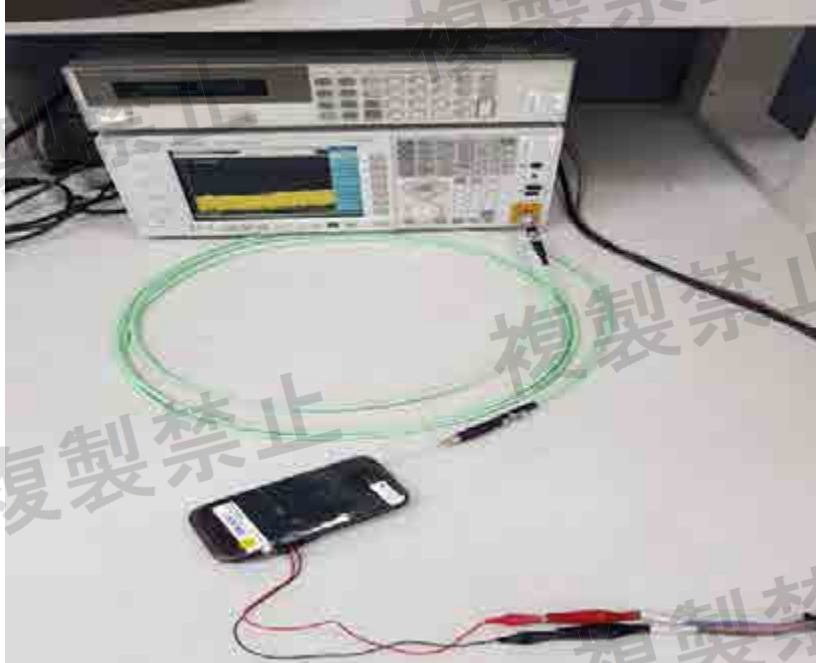


Conducted Measurement Photo(2)




8. Trace Data

8.1 Frequency Tolerance


Ch.1: 2412MHz

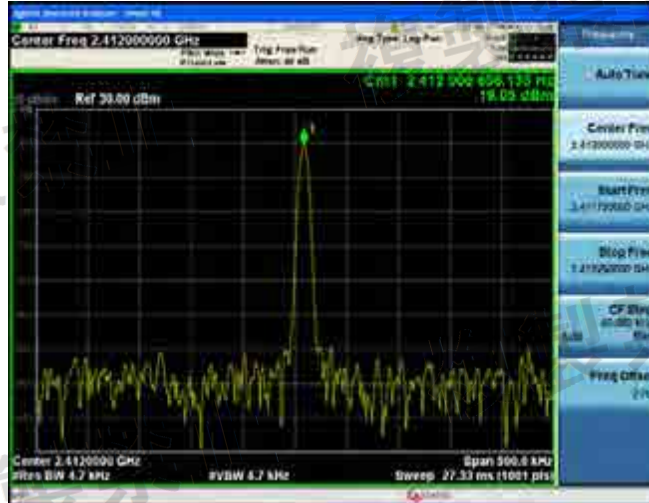

Ch.7: 2442MHz

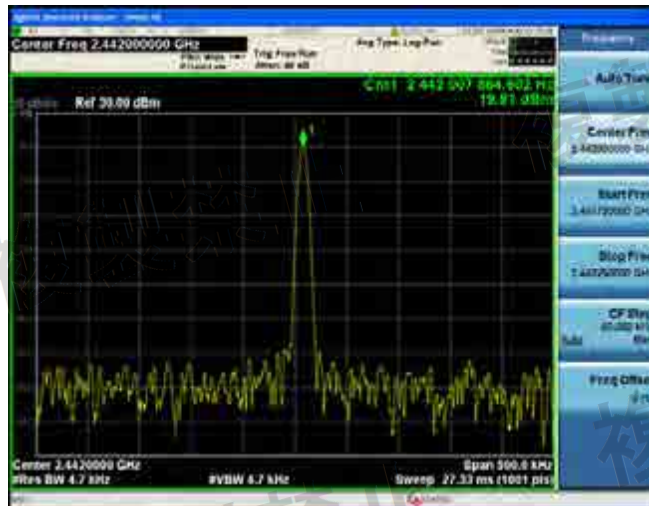


Ch.13: 2472MHz

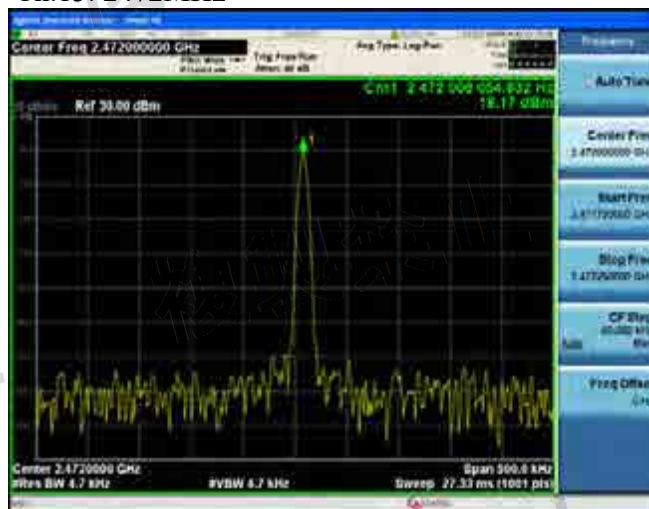


8.2 Occupied and Spread Bandwidth

Ch.1: 2412MHz


Occupied Bandwidth

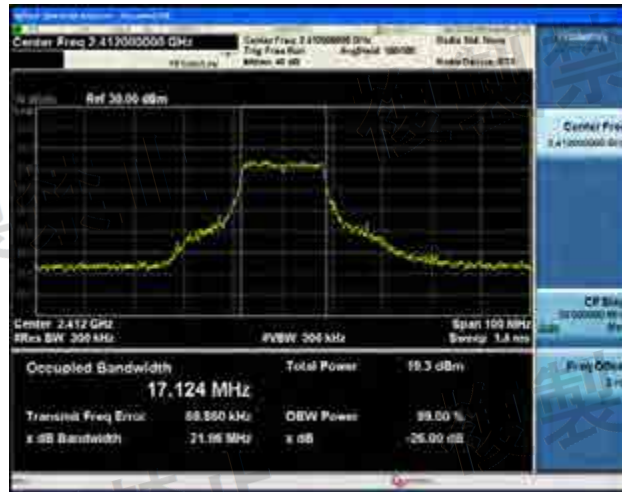

Ch.7: 2442MHz

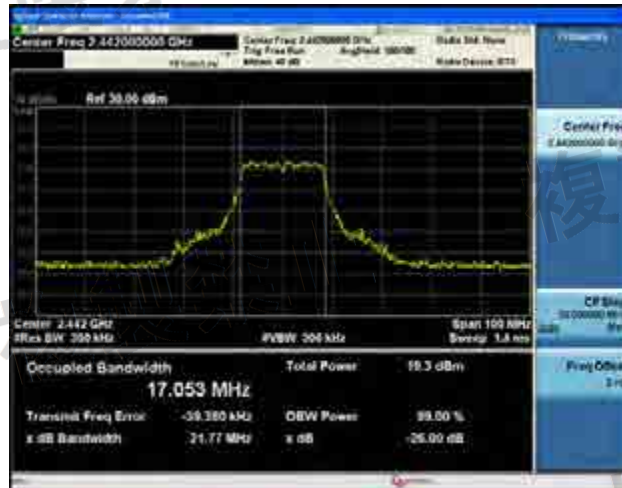

Ch.13: 2472MHz

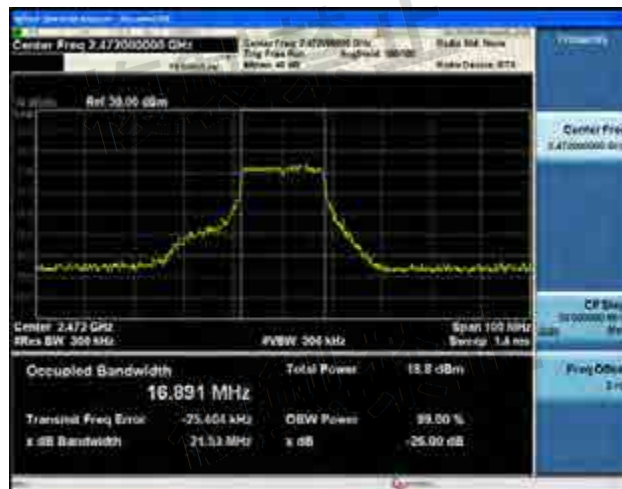


8.3 Tx Spurious Emission Strength

Ch.1: 2412MHz


30-2387MHz



2387-2400MHz

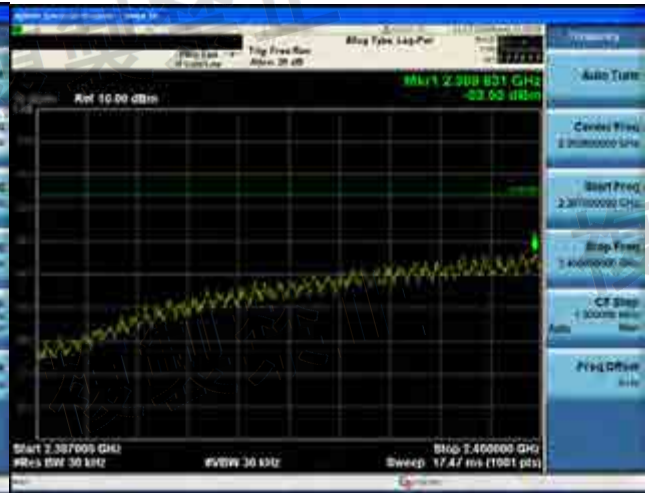

2483.5-2496.5MHz

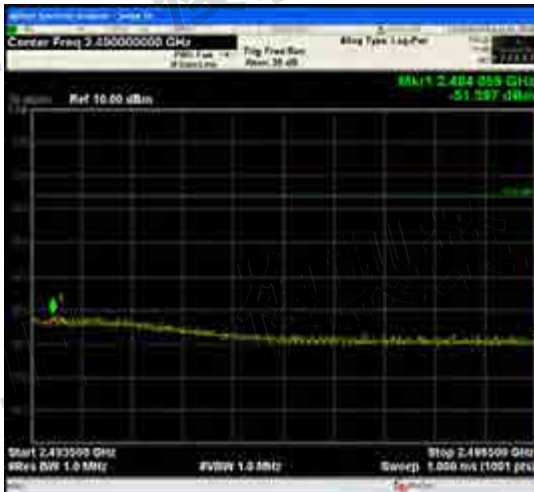


2496.5-12500MHz



8.3 Tx Spurious Emission Strength(2)

Ch.7: 2442MHz

30-2387MHz

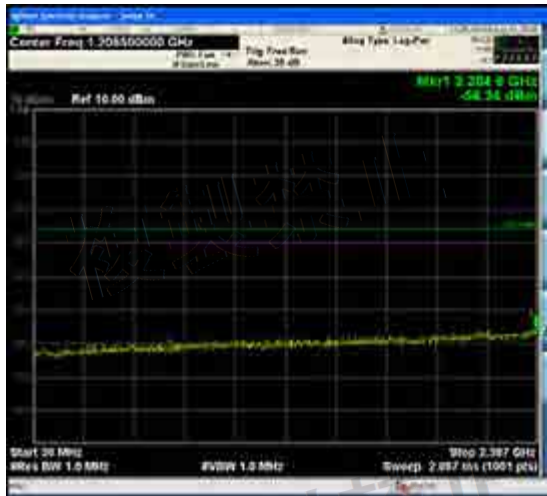

2387-2400MHz



2483.5-2496.5MHz




2496.5-12500MHz



8.3 Tx Spurious Emission Strength(3)

Ch.13: 2472MHz


30-2387MHz

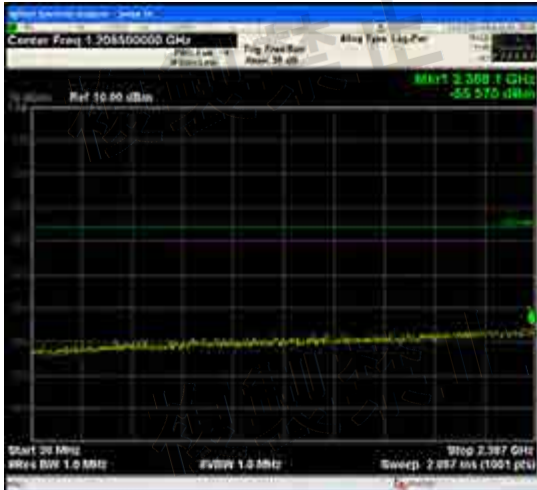

2387-2400MHz



2483.5-2496.5MHz

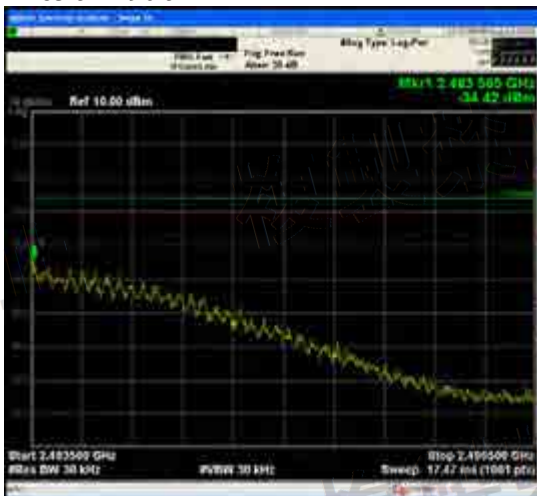


2496.5-12500MHz



8.4 RF Output Power


Ch.1: 2412MHz

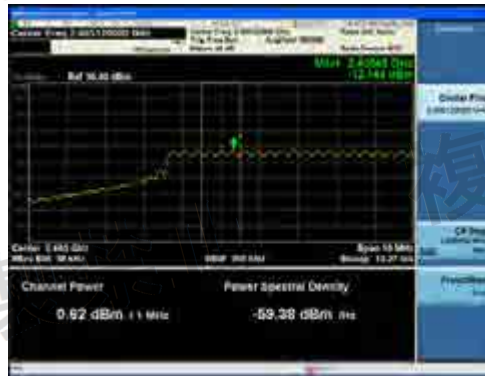

Ch.7: 2442MHz



Ch.13: 2472MHz

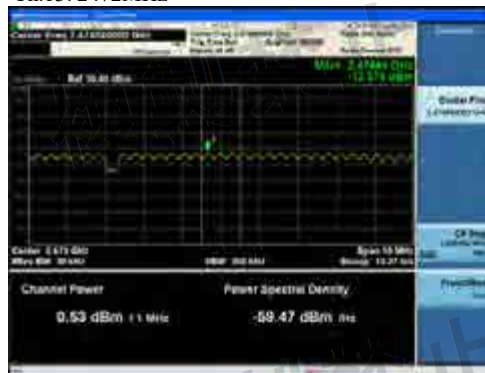

8.4 空中線電力の偏差 RF output power tolerance


Port A ON/OFF time




8.5 Rx Spurious Emission Strength

Ch.1: 2412MHz

10MHz-1GHz

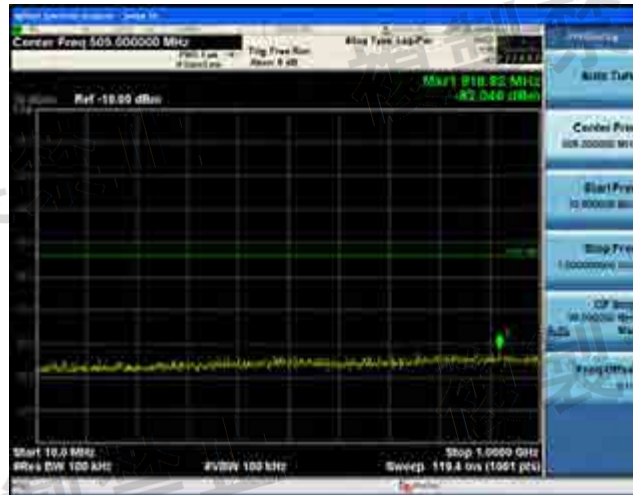

1-5GHz

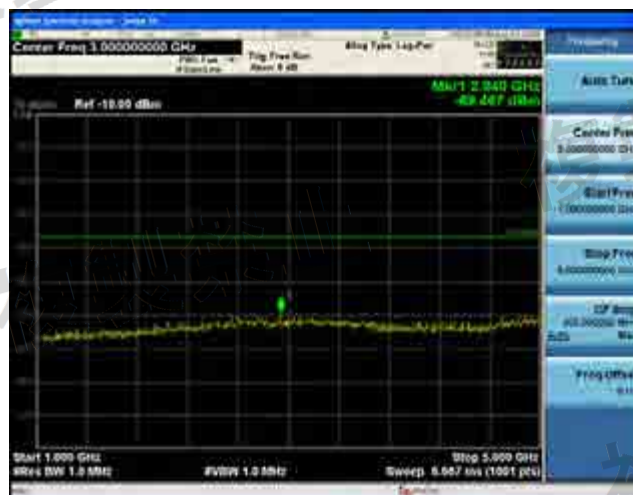


5-12.5GHz




5.5 Rx Spurious Emission Strength(2)

Ch.7: 2442MHz

10MHz-1GHz

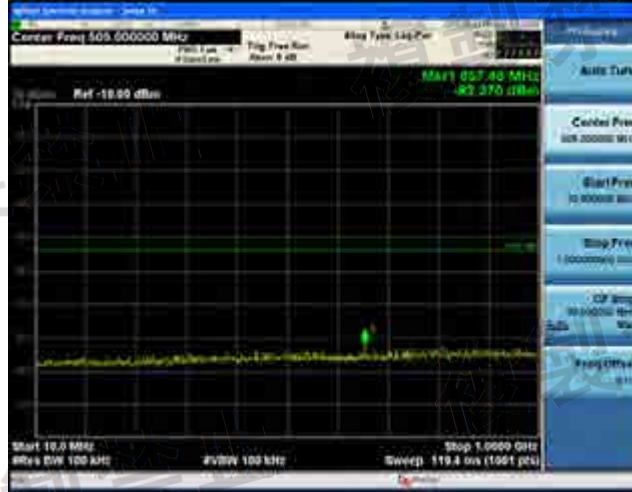

1-5GHz

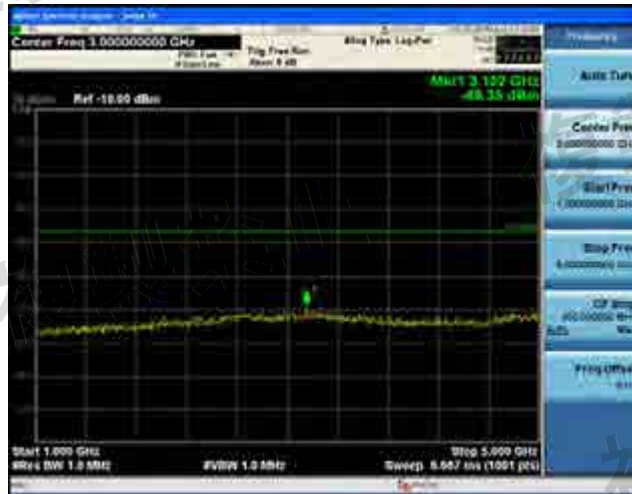


5-12.5GHz



5.5 Rx Spurious Emission Strength(3)

Ch.13: 2472MHz


10MHz-1GHz

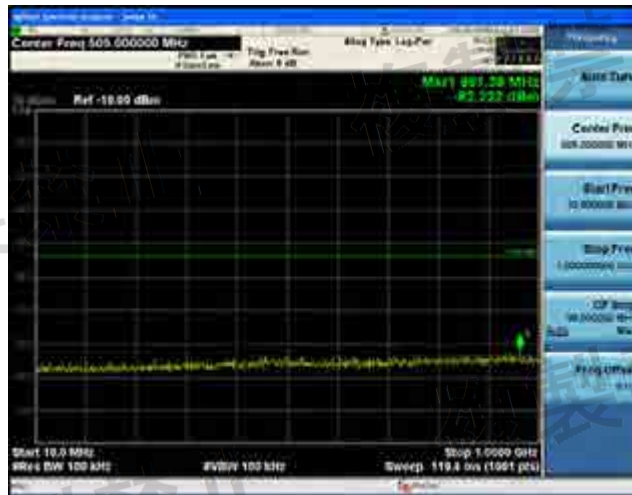

1-5GHz



5-12.5GHz

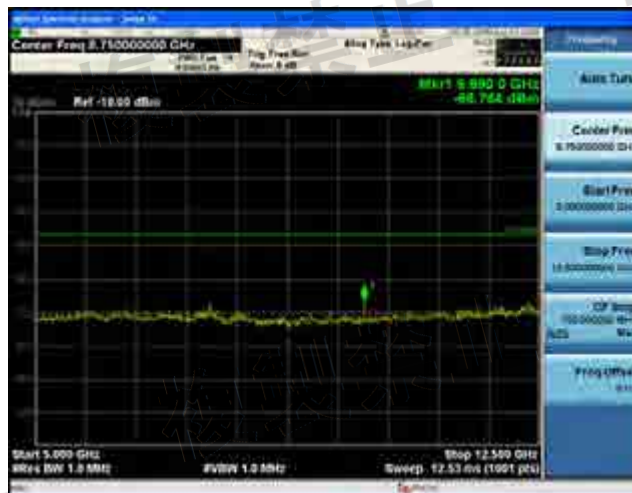

9. Laboratory description

1. Location

Name: DT&C Co., Ltd.

Address: 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935s

Fax: +81-031-321-2855

2. Accreditation and Registration

1) VLAC

Accreditation No.: N/A

2) NVLAP

LAB CODE: N/A

3) BSMI

Laboratory Code: N/A

4) Industry Canada

Site number	Facility	Expiration date
5740A-4	DT&C Co., Ltd.	2020-10-16
-	-	-
-	-	-

5) VCCI Council

Registration number	Expiration date
-	-

6) KOLAS

Registration number	Expiration date
KT393	2021-01-13