

Radio Test Report

Report No.: RJBHUD-WTW-P22040454

Test Model: GB406

Received Date: Apr. 14, 2022

Test Date: Apr. 27, 2022

Issued Date: May 13, 2022

Applicant: Universal Electronics Inc.

Address: 201 East Sandpointe Ave, 7th Floor, Santa Ana Ca, 92707

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Test Instruments	6
2.2 Measurement Uncertainty	6
2.3 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.3 Test Conditions	9
3.4 Assembly	9
3.5 Antenna Specifications	10
3.5.1 Antenna Gain	10
3.5.2 Antenna Pattern	10
4 Test Results	13
4.1 Frequency Tolerance Measurement	13
4.1.1 Limits of Frequency Tolerance Measurement	13
4.1.2 Test Setup	13
4.1.3 Test Results	13
4.2 Occupied Bandwidth Measurement (99% power bandwidth)	14
4.2.1 Limits of Occupied Bandwidth Measurement	14
4.2.2 Test Setup	14
4.2.3 Test Results	15
4.3 Spurious Emissions for Transmitter Measurement	19
4.3.1 Limits of Spurious Emissions	19
4.3.2 Test Setup	19
4.3.3 Test Results	20
4.4 Antenna Power Measurement	33
4.4.1 Limits of Antenna Power	33
4.4.2 Test Setup	33
4.4.3 Test Results	34
4.5 Spurious Emissions for Receiver	35
4.5.1 Limits of Spurious Emissions For Receiver	35
4.5.2 Test Setup	35
4.5.3 Test Result	36
4.6 Interference Prevention Function	40
4.6.1 Limits of Interference Prevention Function	40
4.6.2 Test Setup	40
4.6.3 Test Results	40
5 Photographs of the Test Configuration	41
Appendix - Information of the Testing Laboratories	42

Release Control Record

Issue No.	Description	Date Issued
RJBHUD-WTW-P22040454	Original release	May 13, 2022

1 Certificate of Conformity

Product: Remote Control

Brand: Sharp

Test Model: GB406

Sample Status: Engineering sample

Applicant: Universal Electronics Inc.

Test Date: Apr. 27, 2022

Standards: ARIB STD-T66 (V3.7), MIC notice 88 Appendix 43
Certification Ordinance Article 2-1-19

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** May 13, 2022
Celine Chou / Senior Specialist

Approved by : Jeremy Lin , **Date:** May 13, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

The EUT has been tested according to the following specifications:

Notice 88 Appendix 43 Reference	ARIB STD-T66 Ref.	Report Reference	Parameter	Test Results (Note)
General Provisions				
C	3.2 (4)	4.1	Frequency tolerance	C
D	3.2 (7)	4.2	Occupied bandwidth	C
E	3.2 (6)	4.4	Spurious emissions	C
Transmitting Equipment				
F	3.2 (2)	4.5	Antenna power	C
--	--	--	SAR	NA
Transmitting Antenna				
--	--	3.5	Type, configuration, etc. of transmitting antenna	C
--	--	3.5	Direction pattern of transmitting antenna	C
Receiving Equipment				
G	3.3 (1)	4.6	Spurious emissions of receiver	C
--	--	--	Refer to all articles for transmitting antenna	C
Operating Frequency 2400 to 2483.5MHz				
--	3.7 (1)	3.4	Radio Frequency / modulation section cannot be opened easily	C
--	3.1 (1)	3.1	Communication method	C
--	3.2 (1)a	3.1	Modulation method	C
--	3.2 (1)a	3.1	Spread spectrum method	C
--	3.2 (2)	4.5	Antenna power	C
--	3.6 (2)	4.5	Absolute gain of transmitting antenna	C
--	3.6 (2)	--	Angular width of principal radiation (AWPR)	NA
--	3.2 (10)	--	Number of carriers within 1 MHz bandwidth in OFDM	NA
--	3.2 (8)	4.3	Spreading bandwidth	NA
--	3.2 (9)	4.3	Spreading factor	NA
--	3.2 (11)	--	Frequency retention time (FH employed)	NA
--	3.4.1(1)	4.7	Interference Prevention Function	C

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable

2.1 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration	Calibration Authority	Cal. Method
Spectrum Analyzer / KEYSIGHT	N9020B	MY60110462	Dec. 21, 2021	Dec. 20, 2022	ETC	c)
Signal Generator / Anritsu	E4438C	MY49071692	Nov. 09, 2021	Nov. 08, 2022	ETC	c)
Power Meter / Anritsu	ML2495A	1232003	Jan. 09, 2022	Jan. 08, 2023	ETC	c)
Power Sensor / Anritsu	MA2411B	1207333	Jan. 09, 2022	Jan. 08, 2023	ETC	c)
Power Splitter / Marvelous Microwave Inc.	MVE8546	20161123081	Jan. 12, 2022	Jan. 11, 2023	BV CPS E&E	d)
DC Power Supply / Keysight	U8002A	MY56330015	Note 3	Note 3	BV CPS E&E	d)
True RMS Clamp Meter / Fluke	325	31130711WS	Jun. 02, 2021	Jun. 01, 2022	ETC	c)

Note:

1. Calibration Method

- Calibration conducted by the National Institute of Information and Communications Technology (NICT) or a designated calibration agency under Article 102-18 paragraph (1) of the Radio Law.
- Calibration conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law (Law No. 51 of 1992) Japan Calibration Service System.
- Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- Calibration conducted by using other equipment that listed above from a) to c).

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. The power supply no evaluation calibrated, which used the digital multimeter to verify before each testing.

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in TR 100 028-1.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
Occupied Bandwidth	491.896Hz
Spurious emissions	2.208dB
Output power density	2.889dB
Out of band radiated power	3.93dB
Frequency Tolerance	6805.18Hz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Remote Control
Brand	Sharp
Test Model	GB406
Status of EUT	Engineering sample
Nominal Voltage	3Vdc from battery
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Rated RF Output Power	3.300mW
Conducted RF Output Power	3.243mW
Radiated RF Output Power	14.124mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	NA
Data Cable Supplied	NA

Note: The antenna information is listed as below.

Type	Connector	Gain (dBi)
PCB	NA	6.39

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note: The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore only the data of the test channels were recorded in this report.

By means of test software (RadioControlConsole v0.4.0.3) provided by manufacture, the power levels during the tests were set according to the following codes:

Channel	Power Setting
0	5
19	5
39	5

3.3 Test Conditions

Test Conditions	Voltage (Vdc)
Vnormal	3.00
Vmax.	3.30
Vmin.	2.70

Note: After checking the fluctuation of input voltage to the circuit of the radio part (excluding the power supply) of the equipment to be tested, the fluctuation less than +/- 1 % when input voltage from an external supply into the equipment fluctuates +/- 10%, therefore, the test is carried out only at the normal voltage.

Test Item	Test Conditions	Environmental Conditions	Test Engineer
Frequency Tolerance	BT LE 4.2	25 deg.C, 60 % RH	Vincent Huang
Occupied Bandwidth (99% power bandwidth)	BT LE 4.2	25 deg.C, 60 % RH	Vincent Huang
Spurious Emissions for Transmitter	BT LE 4.2	25 deg.C, 60 % RH	Vincent Huang
Antenna Power	BT LE 4.2	25 deg.C, 60 % RH	Vincent Huang
Spurious Emissions for Receiver	BT LE 4.2	25 deg.C, 60 % RH	Vincent Huang

3.4 Assembly

The EUT used a kind of particular screw, which could not operated by a tool bought in the market. Only means of brute force will be able to open.


3.5 Antenna Specifications

3.5.1 Antenna Gain


Type	Connector	Gain (dBi)
PCB	NA	6.39

* The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.5.2 Antenna Pattern

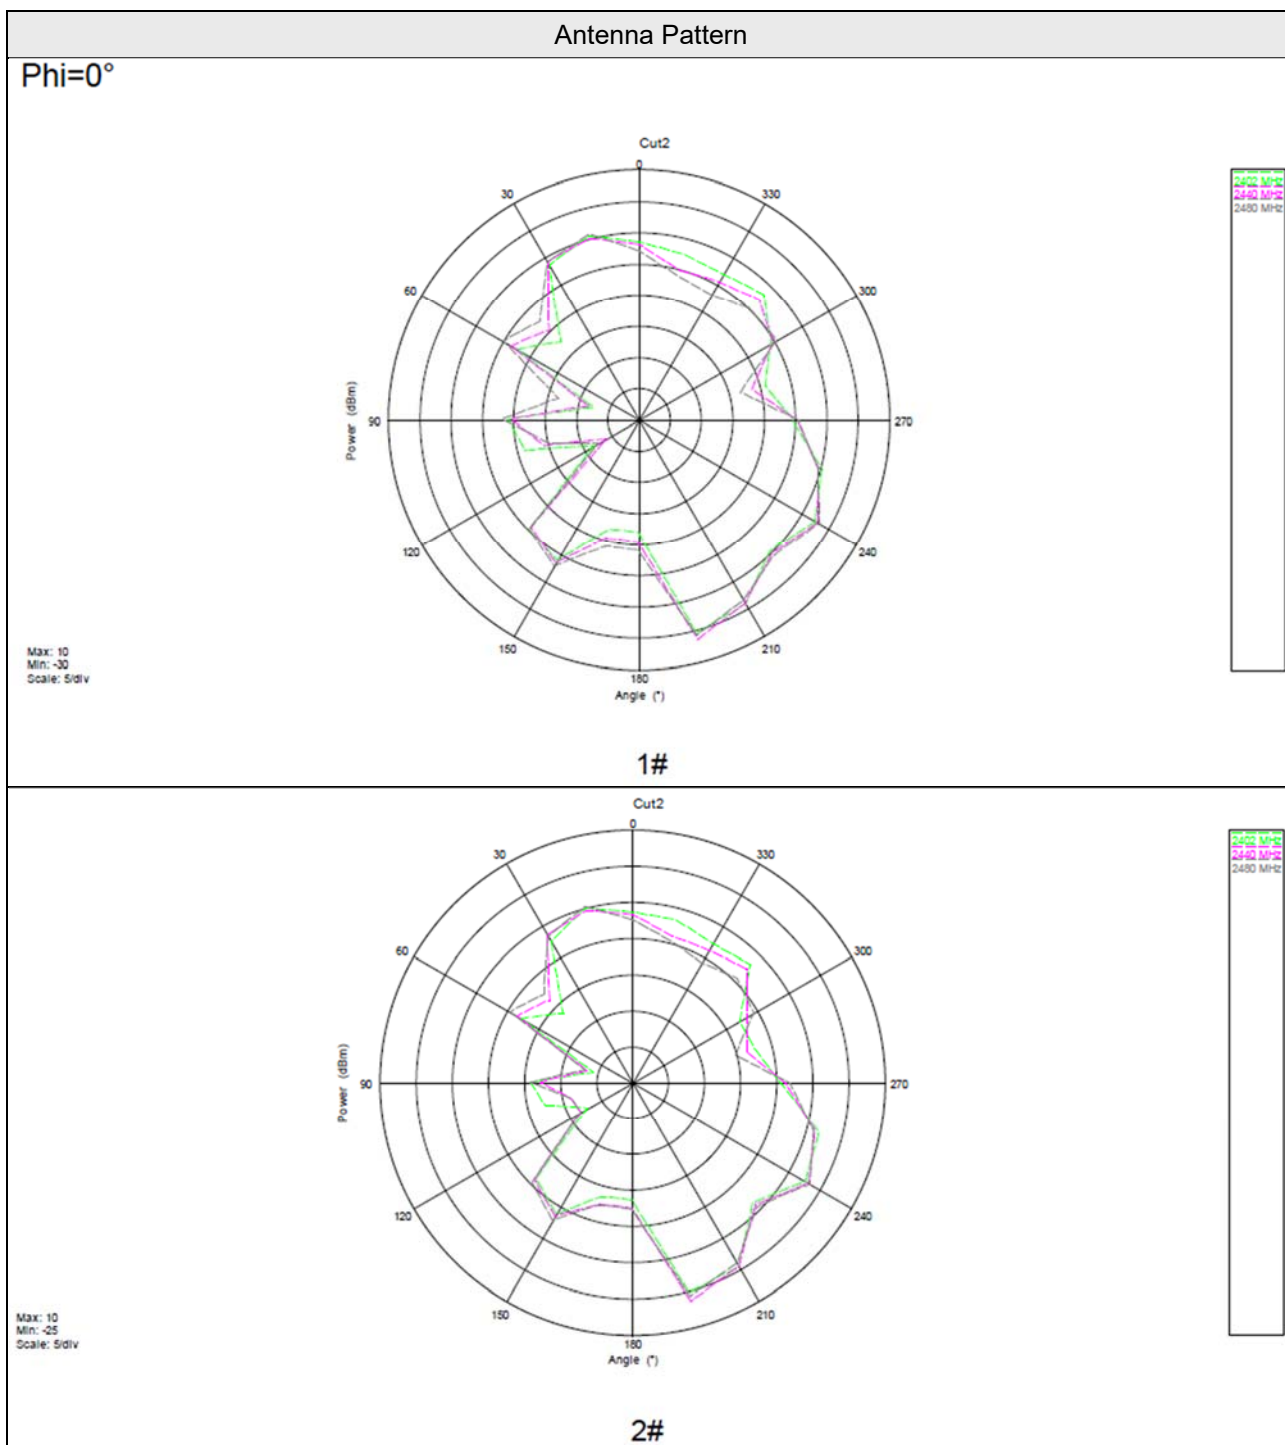


Phi=90°

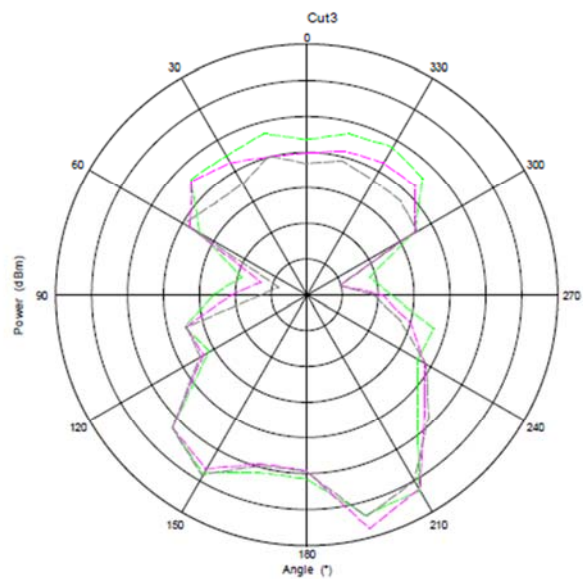

Max: 4
Min: -10
Scale: 2/div


1#

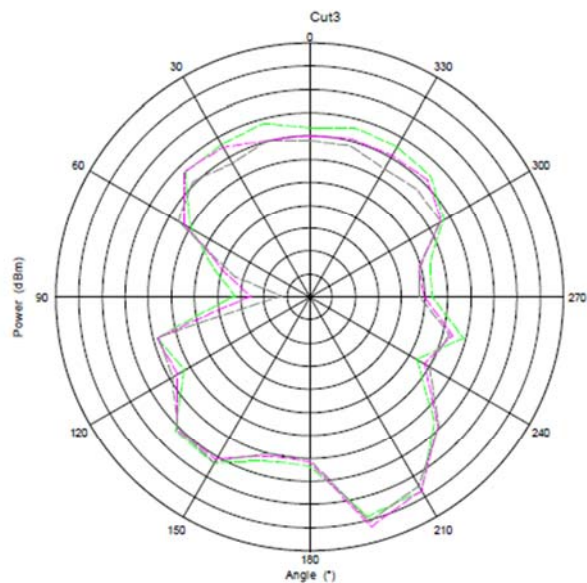


Max: 6
Min: -15
Scale: 2/div

2#

Theta=90°

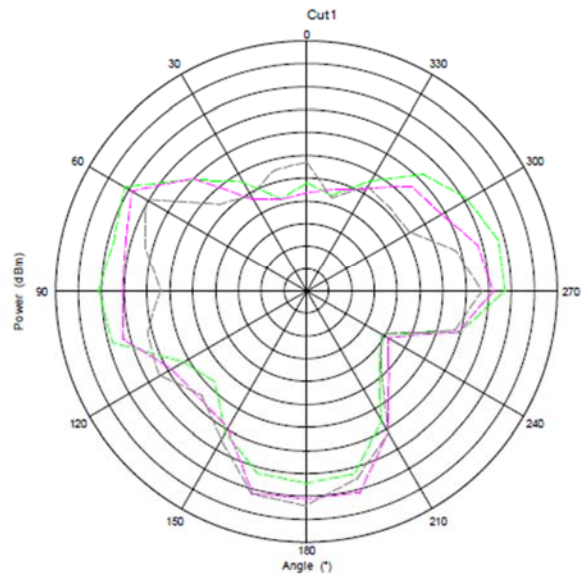

2400 MHz
2440 MHz
2480 MHz

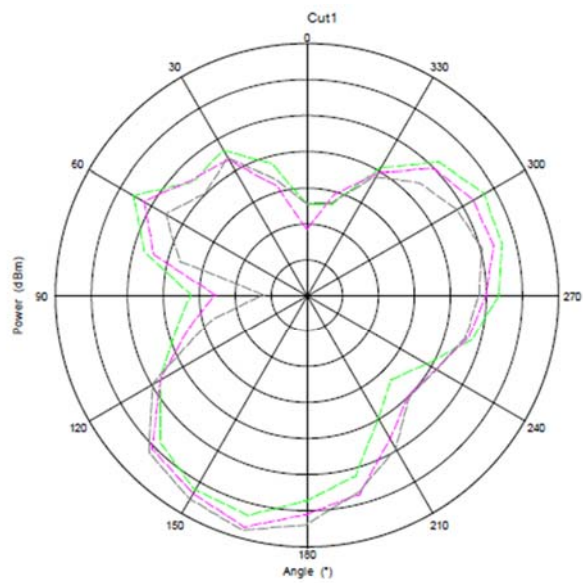

2400 MHz
2440 MHz
2480 MHz

2#

4 Test Results

4.1 Frequency Tolerance Measurement

4.1.1 Limits of Frequency Tolerance Measurement

Tolerance of frequency shall be +/- 50ppm

4.1.2 Test Setup



4.1.3 Test Results


Channel	Frequency (MHz)	V_{normal}		$V_{max.}$		$V_{min.}$	
		Carrier Frequency (MHz)	Frequency Tolerance (ppm)	Carrier Frequency (MHz)	Frequency Tolerance (ppm)	Carrier Frequency (MHz)	Frequency Tolerance (ppm)
0	2402	2401.999400	-0.249	2401.999000	-0.416	2401.999000	-0.416
19	2440	2439.999000	-0.409	2439.999000	-0.409	2439.999000	-0.409
39	2480	2479.999000	-0.403	2479.999000	-0.403	2479.999000	-0.403

4.2 Occupied Bandwidth Measurement (99% power bandwidth)

4.2.1 Limits of Occupied Bandwidth Measurement

Item	Limit
Occupied bandwidth	< 26MHz

4.2.2 Test Setup

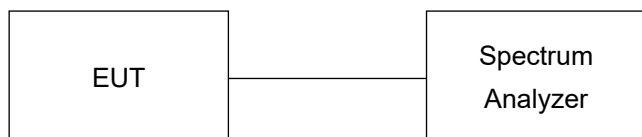


4.2.3 Test Results


Channel	Frequency (MHz)	V_{normal}	$V_{\text{max.}}$	$V_{\text{min.}}$
		Occupied Bandwidth (MHz)	Occupied Bandwidth (MHz)	Occupied Bandwidth (MHz)
0	2402	1.37	1.38	1.38
19	2440	1.37	1.37	1.37
39	2480	1.37	1.36	1.37

Note: For the test plots please refer to the below pages.


V_{normal}

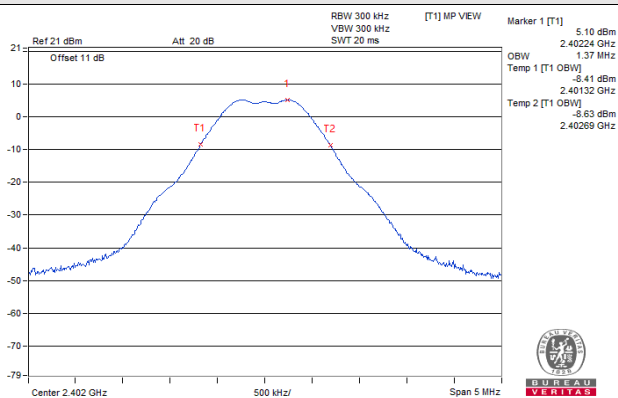

V_{max.}

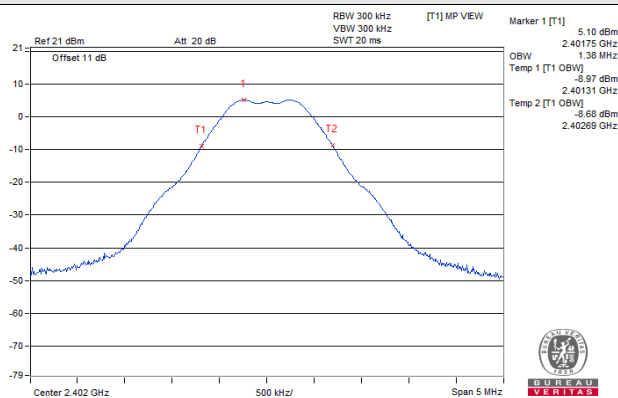


V_{min.}

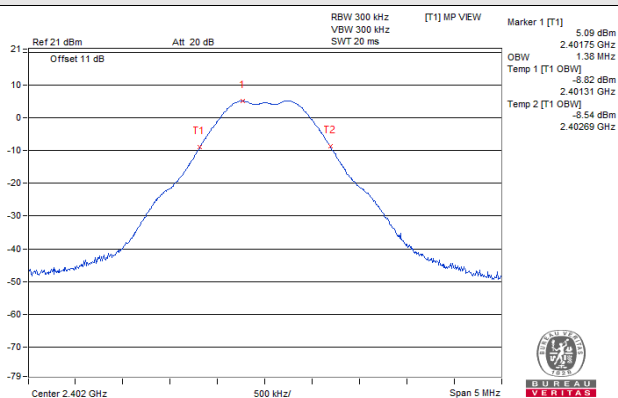


CH 0 (2402MHz)


V_{normal}

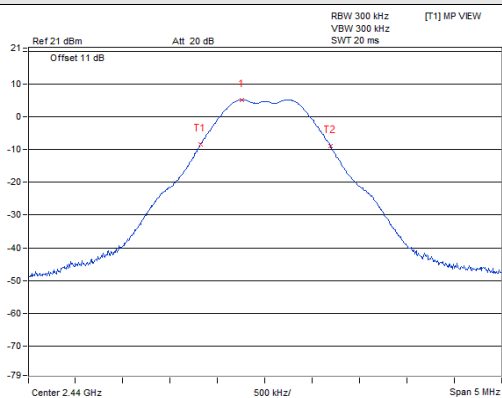


V_{max.}

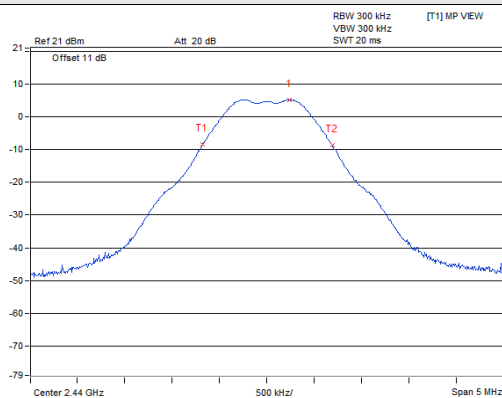

V_{min.}

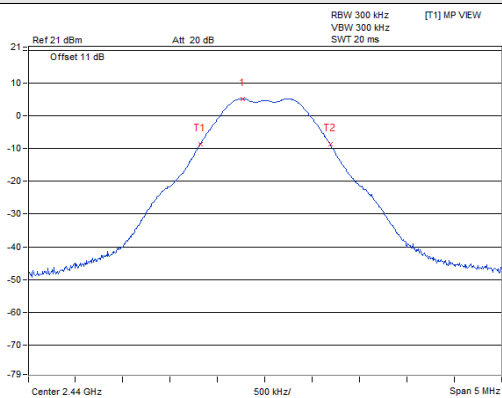

CH 19 (2440MHz)

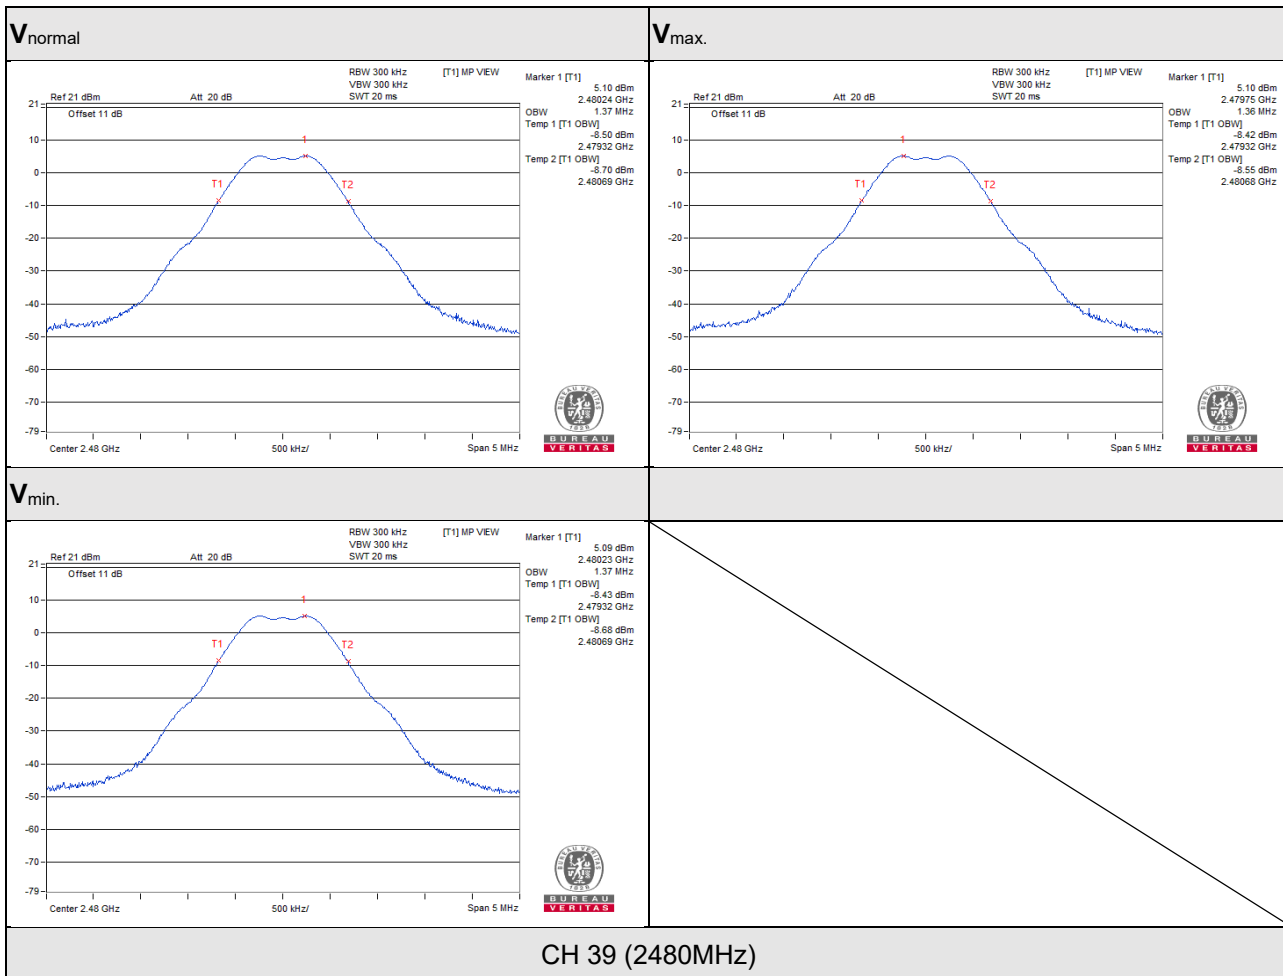

4.3 Spurious Emissions for Transmitter Measurement

4.3.1 Limits of Spurious Emissions

Frequencies (MHz)	Limit
Operating frequency 2400 to 2483.5MHz	
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz to 2387MHz	$\leq 2.5 \text{ uW/MHz}$
2387.0MHz to 2400.0MHz	$\leq 25 \text{ uW/MHz}$
2483.5MHz to 2496.5MHz	$\leq 25 \text{ uW/MHz}$
2496.5MHz to 12500.0MHz	$\leq 2.5 \text{ uW/MHz}$

4.3.2 Test Setup



4.3.3 Test Results

Test Channel		CH 0 (2402MHz)			
Test Condition	Frequency Range (MHz)	Frequency (MHz)	Measured Value (uW)	Limit (uW)	Result
V_{normal}	30 to 1000	192.596	0.004395	0.25	Pass
	1000 to 2387	2327.705	0.053088	2.5	Pass
	2387 to 2400	2399.996	8.763054	25	Pass(1)
	2483.5 to 2496.5	2484.458	0.060534	25	Pass
	2496.5 to 12500	2499.000	0.018281	2.5	Pass
V_{max.}	30 to 1000	971.506	0.003459	0.25	Pass
	1000 to 2387	2338.455	0.053827	2.5	Pass
	2387 to 2400	2399.998	9.286168	25	Pass(2)
	2483.5 to 2496.5	2483.839	0.058076	25	Pass
	2496.5 to 12500	2497.750	0.018923	2.5	Pass
V_{min.}	30 to 1000	87.957	0.003556	0.25	Pass
	1000 to 2387	2338.455	0.059566	2.5	Pass
	2387 to 2400	2400.000	9.627531	25	Pass(3)
	2483.5 to 2496.5	2490.552	0.066681	25	Pass
	2496.5 to 12500	2497.750	0.036224	2.5	Pass


Test Channel		CH 19 (2440MHz)			
Test Condition	Frequency Range (MHz)	Frequency (MHz)	Measured Value (uW)	Limit (uW)	Result
V_{normal}	30 to 1000	133.062	0.004083	0.25	Pass
	1000 to 2387	2367.582	0.053333	2.5	Pass
	2387 to 2400	2391.769	0.040644	25	Pass
	2483.5 to 2496.5	2495.668	0.040179	25	Pass
	2496.5 to 12500	2506.503	0.047098	2.5	Pass
V_{max.}	30 to 1000	69.527	0.003062	0.25	Pass
	1000 to 2387	2377.117	0.051761	2.5	Pass
	2387 to 2400	2391.990	0.044771	25	Pass
	2483.5 to 2496.5	2491.958	0.038815	25	Pass
	2496.5 to 12500	2516.507	0.046666	2.5	Pass
V_{min.}	30 to 1000	395.447	0.003062	0.25	Pass
	1000 to 2387	2364.981	0.054576	2.5	Pass
	2387 to 2400	2392.144	0.055081	25	Pass
	2483.5 to 2496.5	2495.100	0.045604	25	Pass
	2496.5 to 12500	2515.256	0.045920	2.5	Pass

Test Channel		CH 39 (2480MHz)			
Test Condition	Frequency Range (MHz)	Frequency (MHz)	Measured Value (uW)	Limit (uW)	Result
V_{normal}	30 to 1000	993.088	0.003882	0.25	Pass
	1000 to 2387	2384.226	0.037411	2.5	Pass
	2387 to 2400	2399.974	0.064269	25	Pass
	2483.5 to 2496.5	2483.500	0.210863	25	Pass
	2496.5 to 12500	2544.016	0.042364	2.5	Pass
V_{max.}	30 to 1000	282.806	0.003767	0.25	Pass
	1000 to 2387	2383.879	0.037844	2.5	Pass
	2387 to 2400	2399.951	0.064417	25	Pass
	2483.5 to 2496.5	2483.504	0.213304	25	Pass
	2496.5 to 12500	2544.016	0.043551	2.5	Pass
V_{min.}	30 to 1000	105.175	0.003573	0.25	Pass
	1000 to 2387	2385.092	0.026485	2.5	Pass
	2387 to 2400	2399.952	0.067608	25	Pass
	2483.5 to 2496.5	2483.500	0.218273	25	Pass
	2496.5 to 12500	2552.769	0.044157	2.5	Pass

Note:







1. The spectrum plots are attached on the following pages.
2. (No.): The value was tested under Measuring Mode *Zero Span.

Vnormal

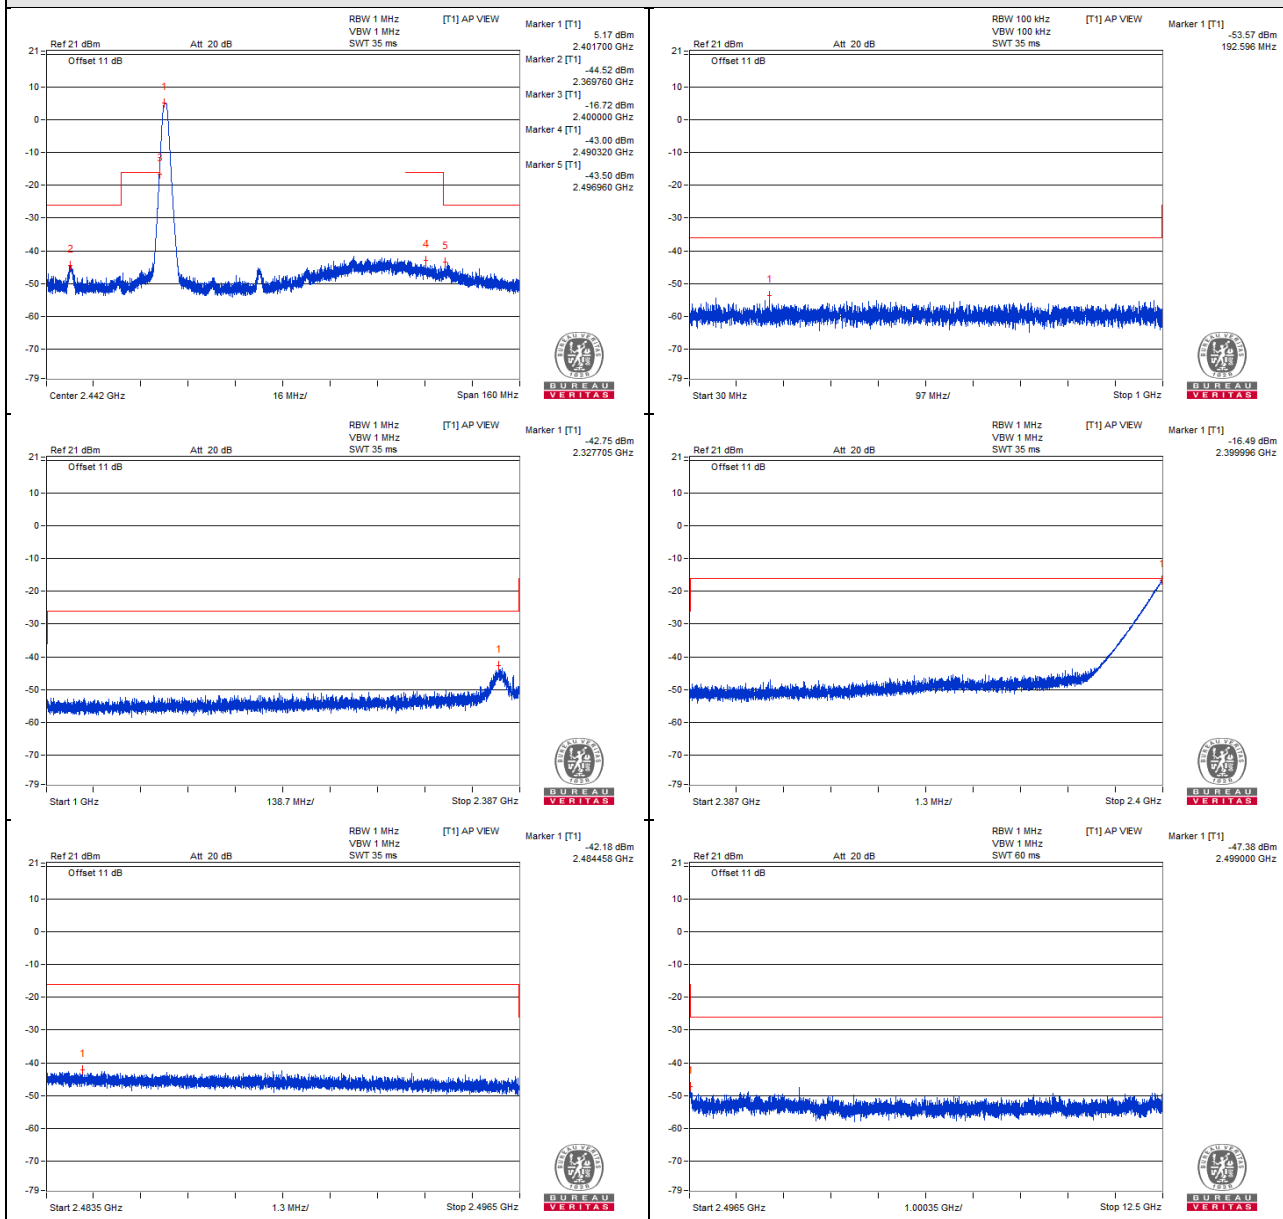


CH 0 (2402MHz)

V_{max}.

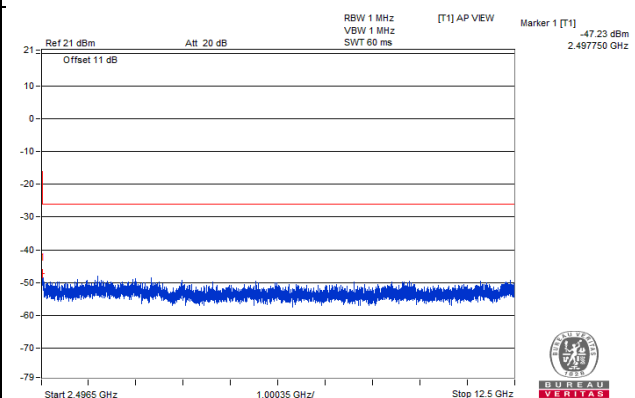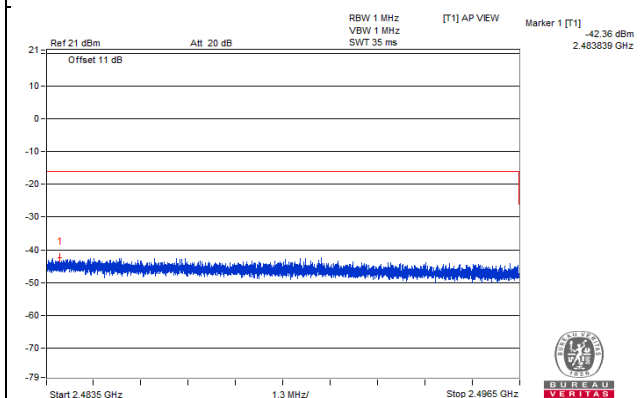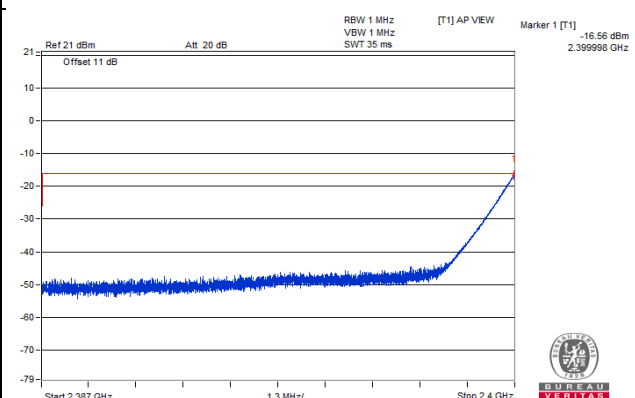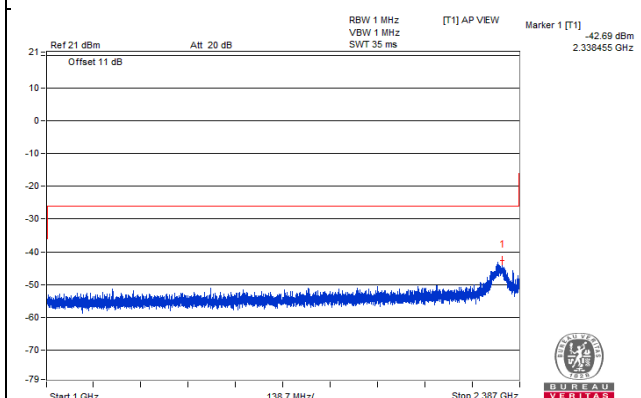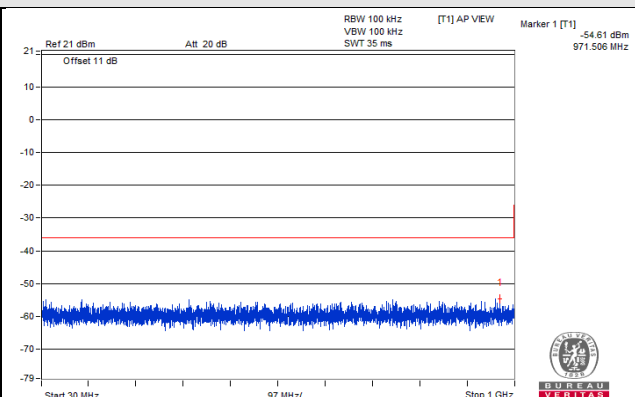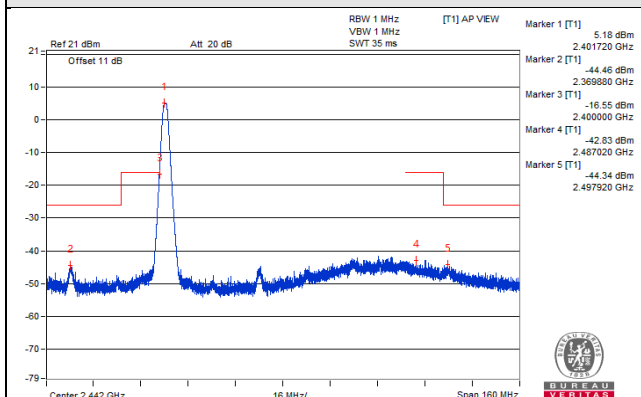











CH 0 (2402MHz)

V_{min}.

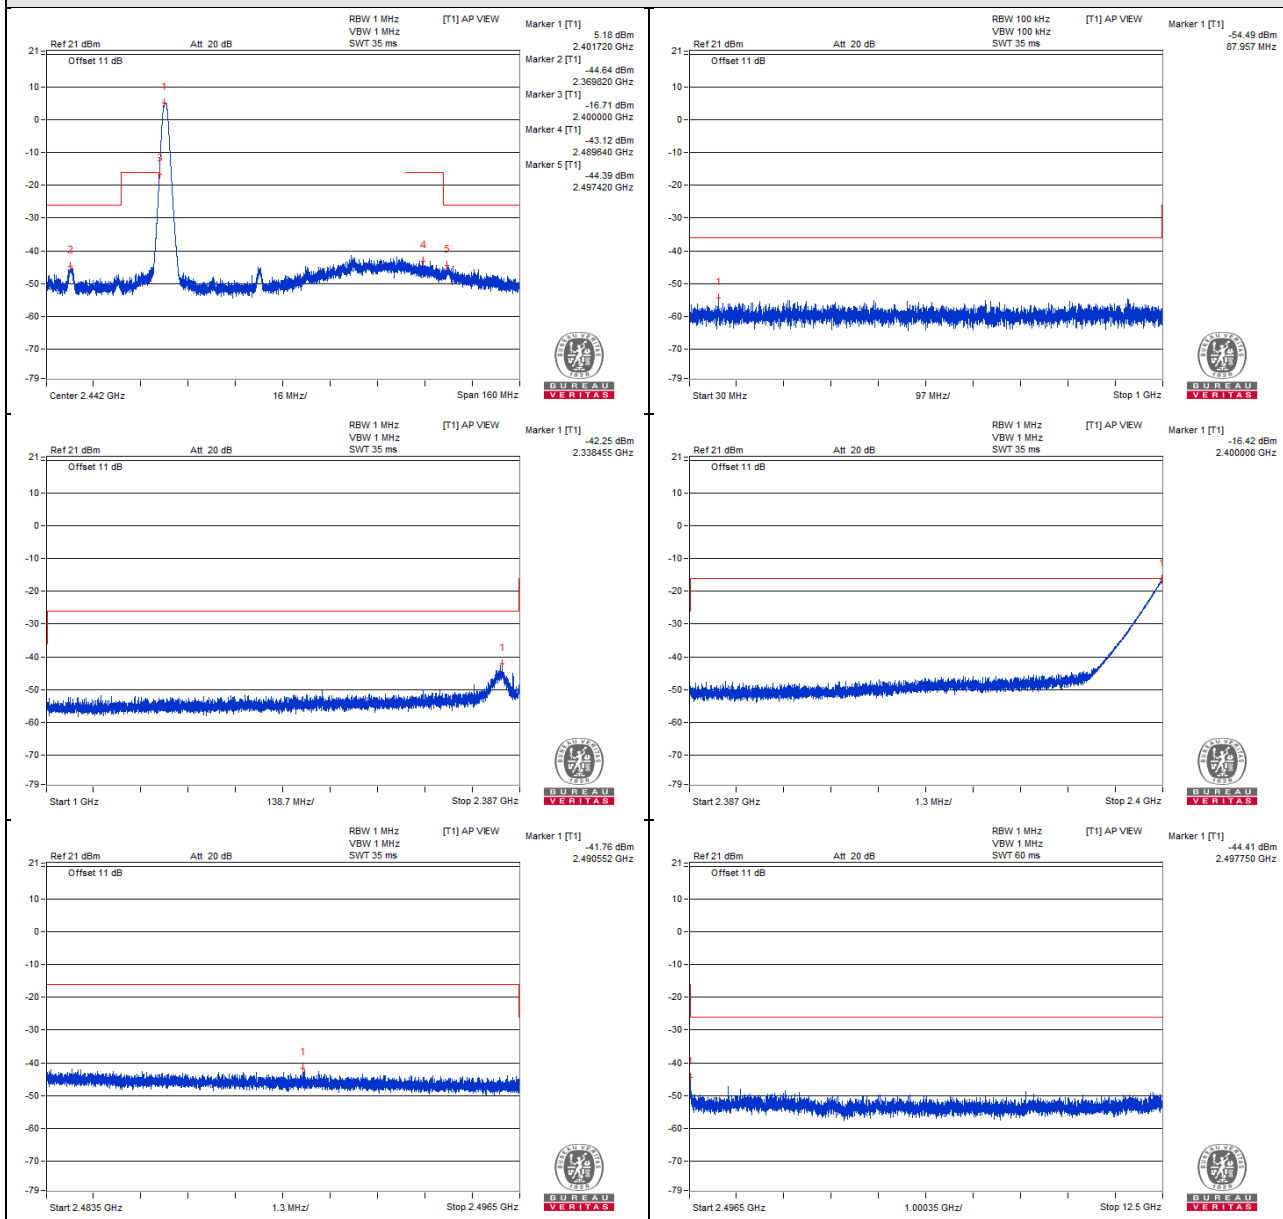


CH 0 (2402MHz)

Vnormal

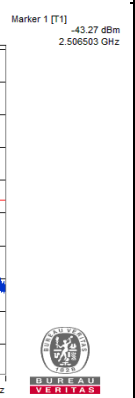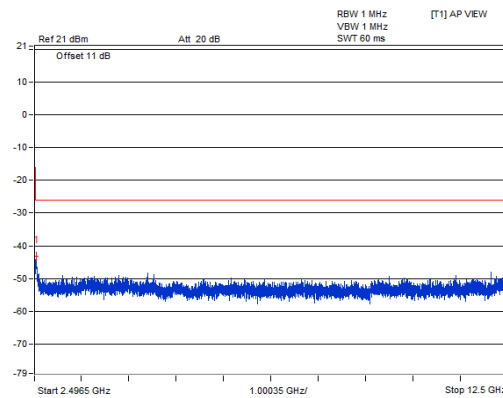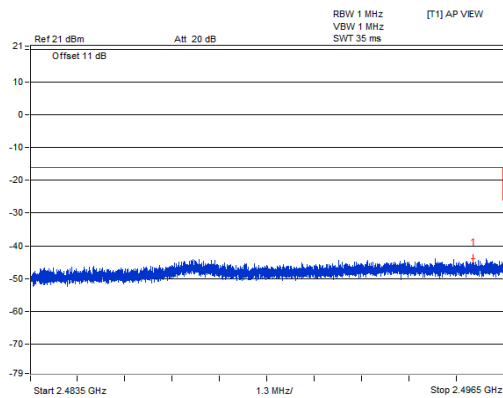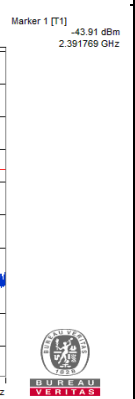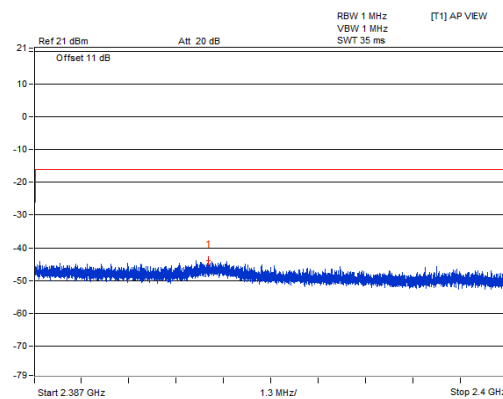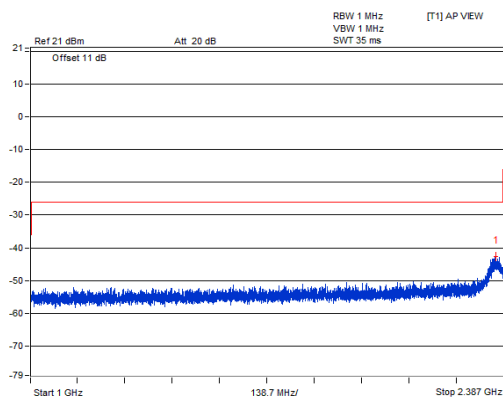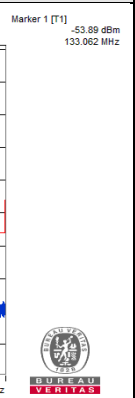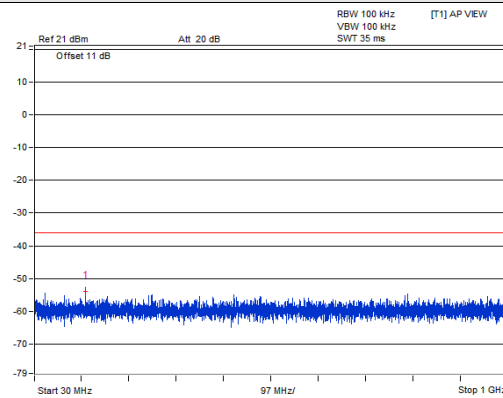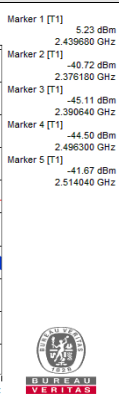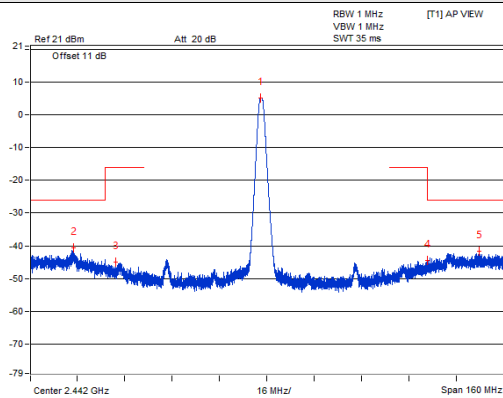


CH 19 (2440MHz)

V_{max}.

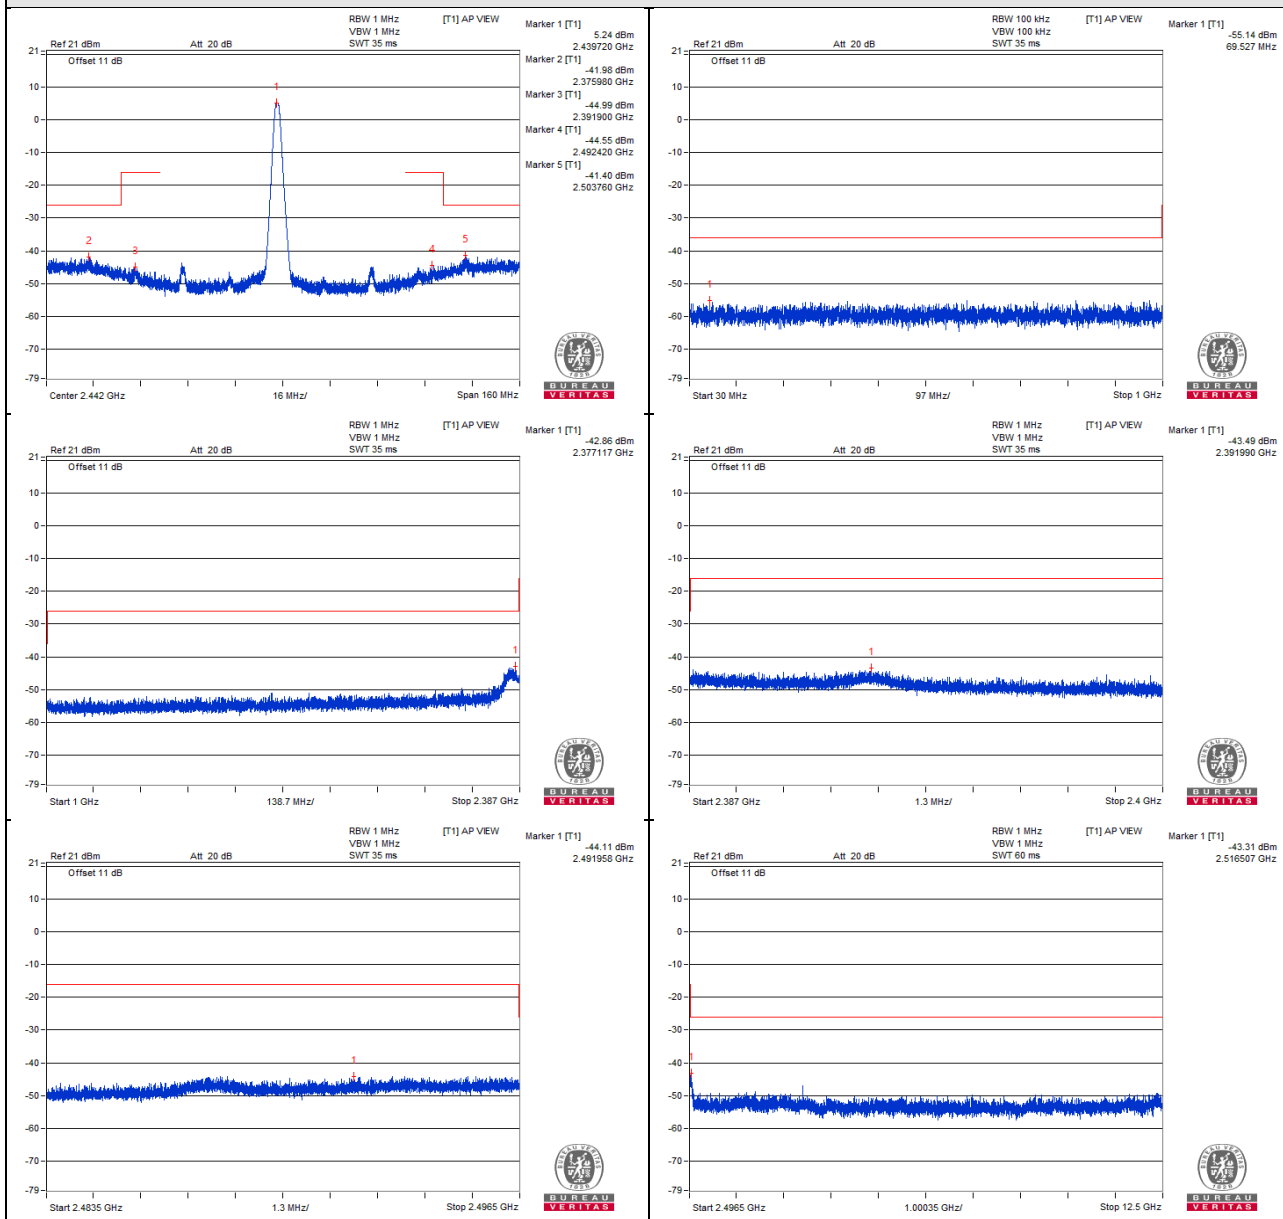







CH 19 (2440MHz)

V_{min}.

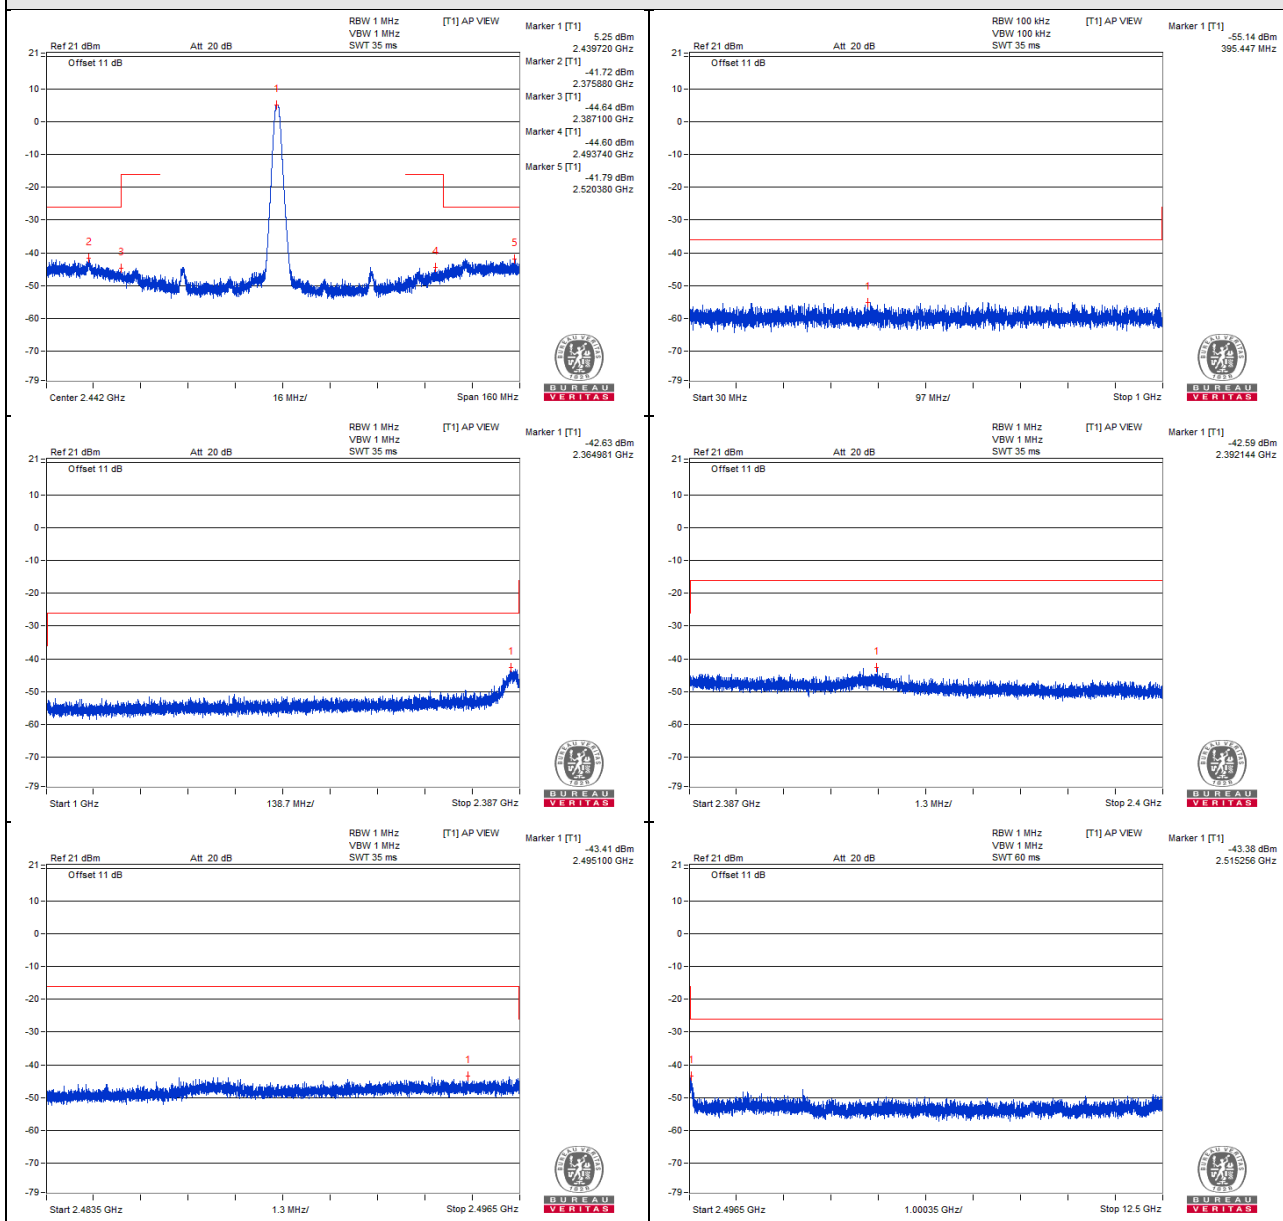







CH 19 (2440MHz)

Vnormal

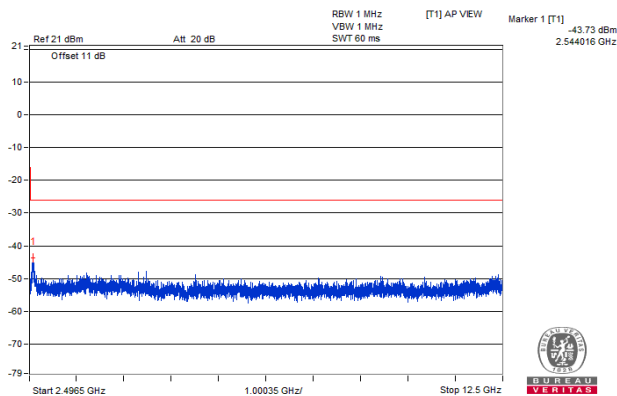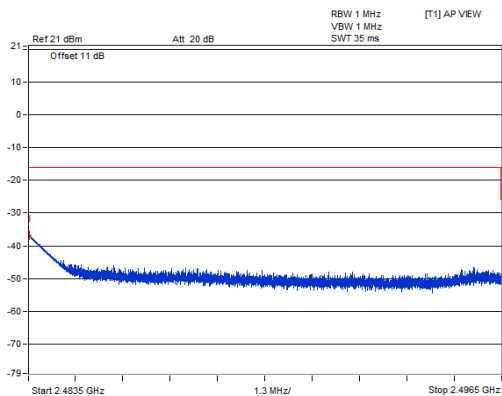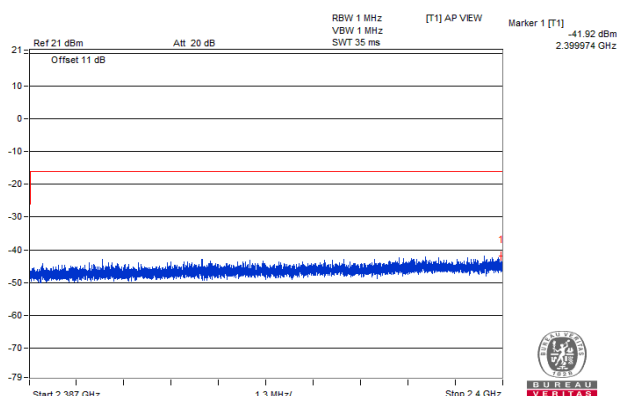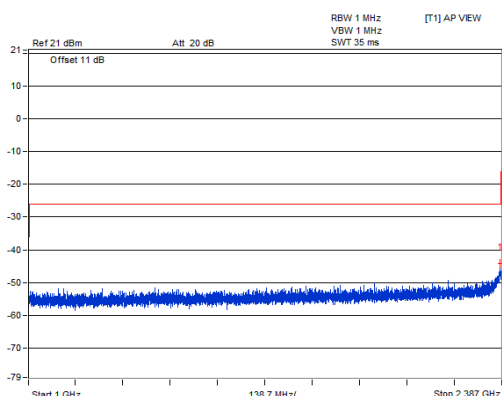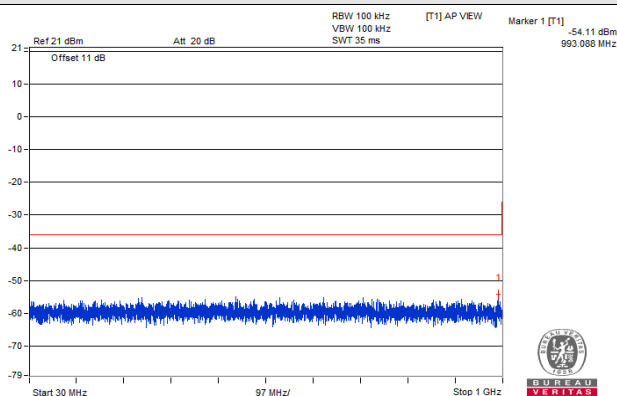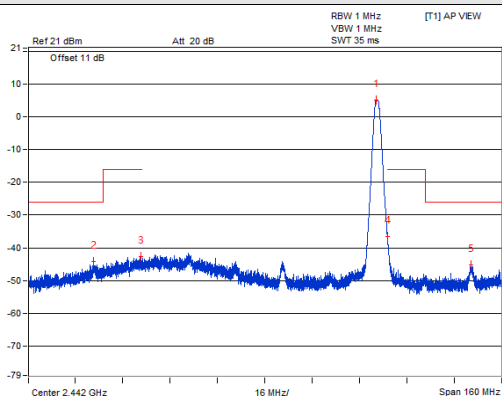


CH 39 (2480MHz)

V_{max}.

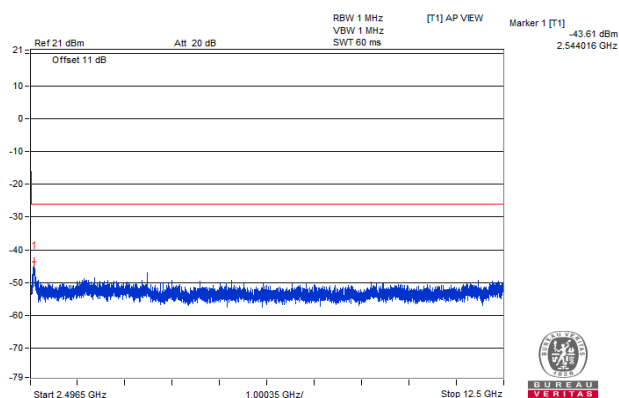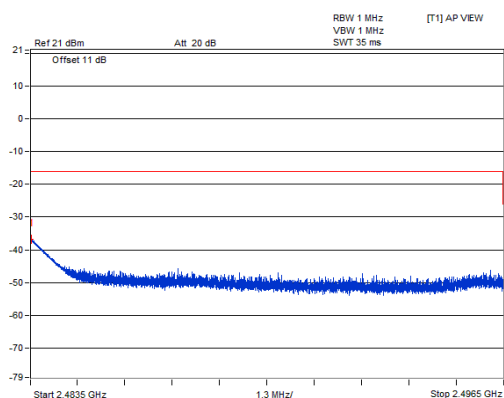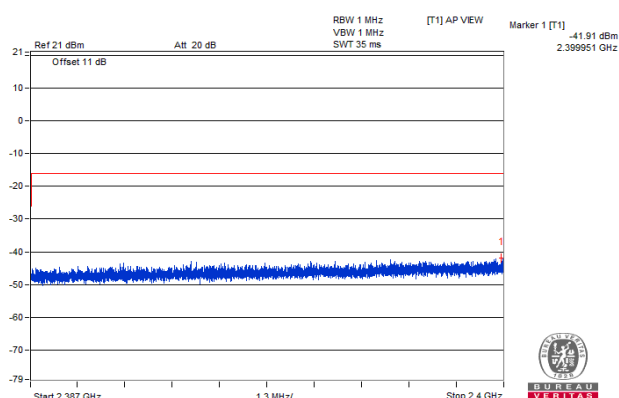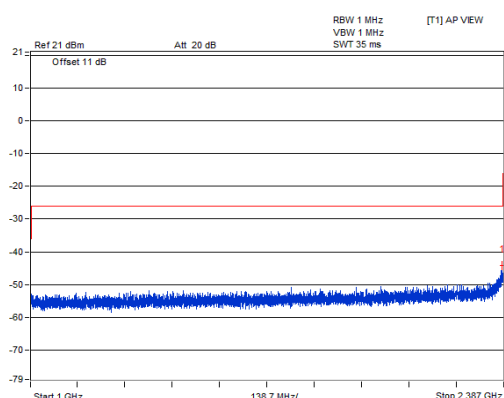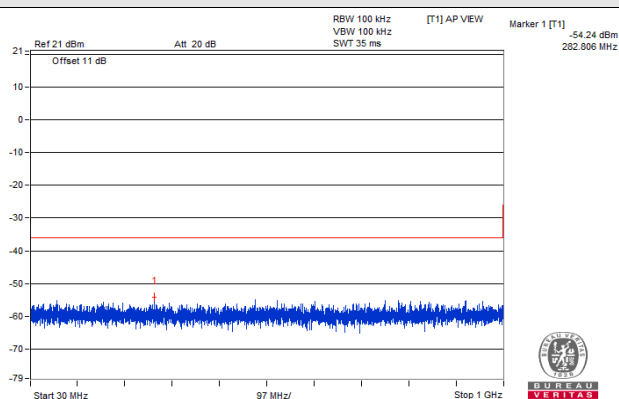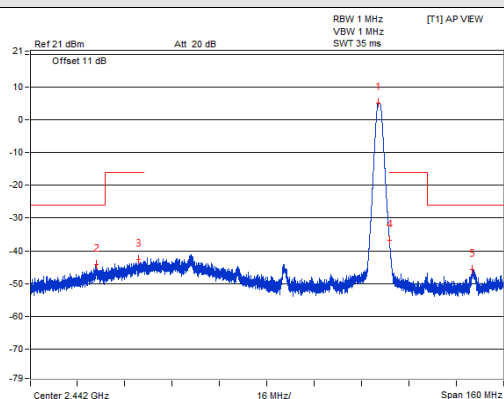

CH 39 (2480MHz)





V_{min}.

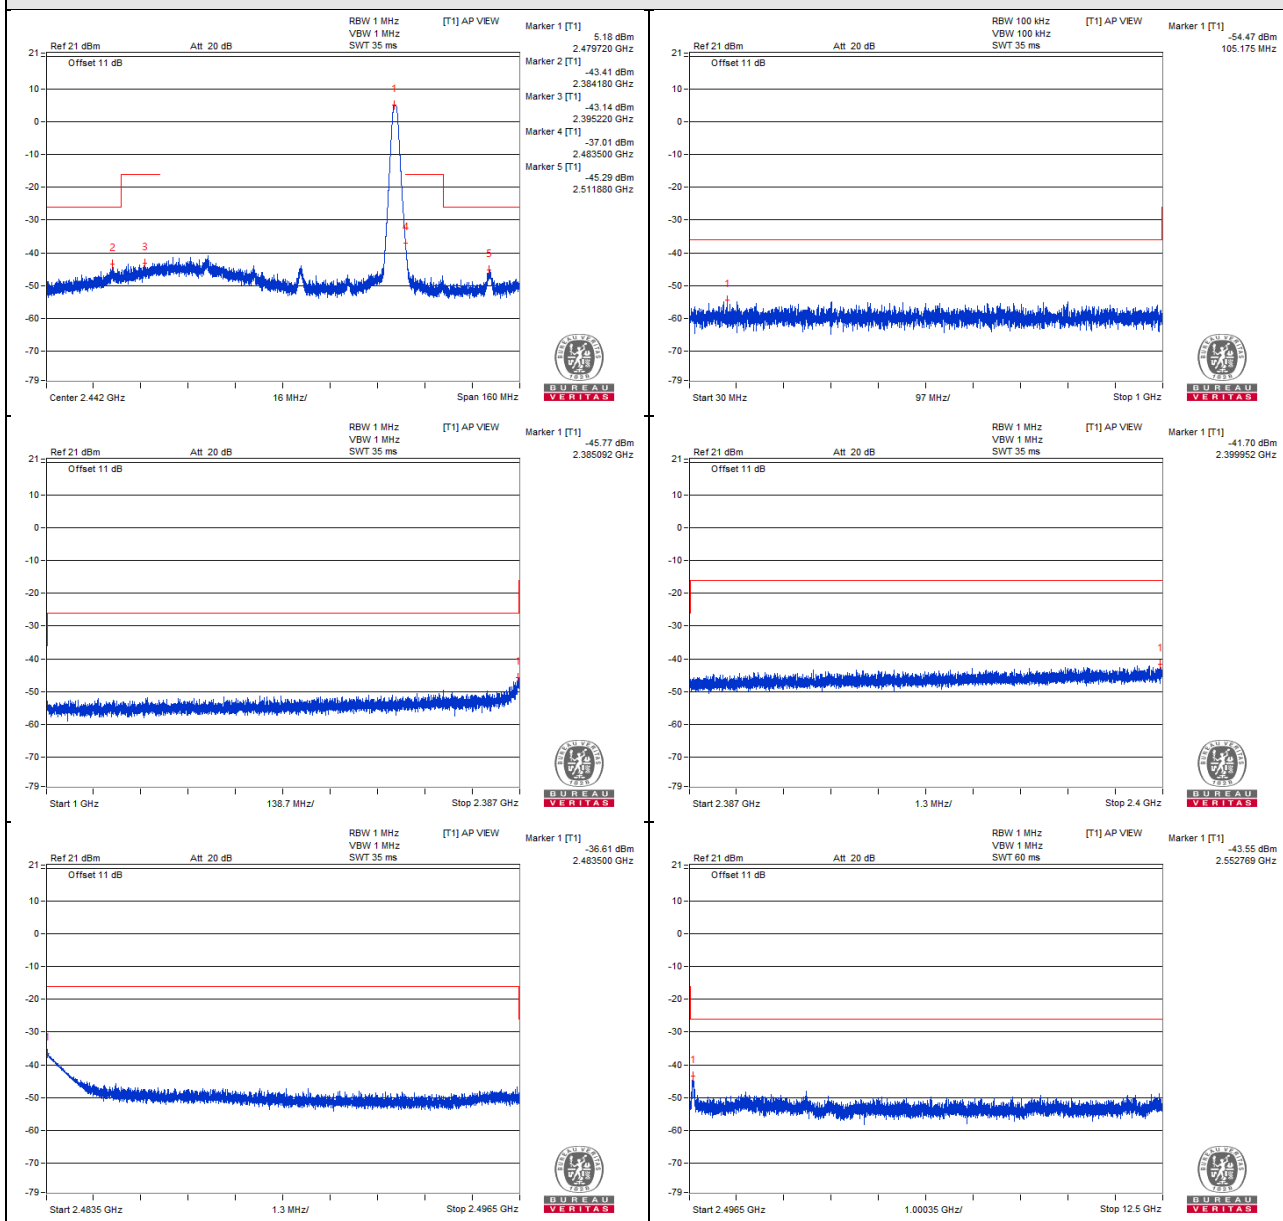

CH 39 (2480MHz)

Measuring Mode *Zero Span

1. Set the spectrum analyzer as below and it takes in a value of all data point.
2. Regarding the all data value, it transforms the “dBm” value into “uW” value.
3. It adds the all values and calculates a grand total. Define a grand total as “P”.
4. It divides “P” by sample data point (ex.501) and calculates the mean value.
5. It reports the mean value.

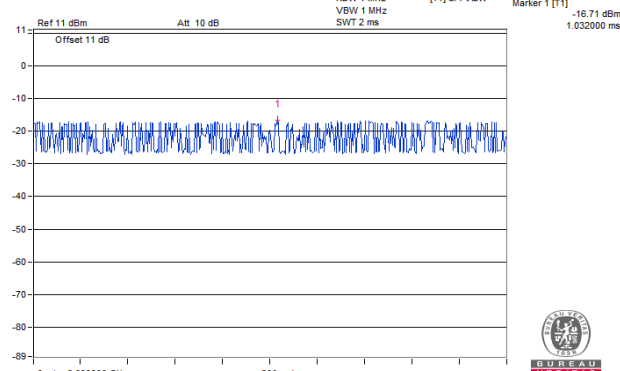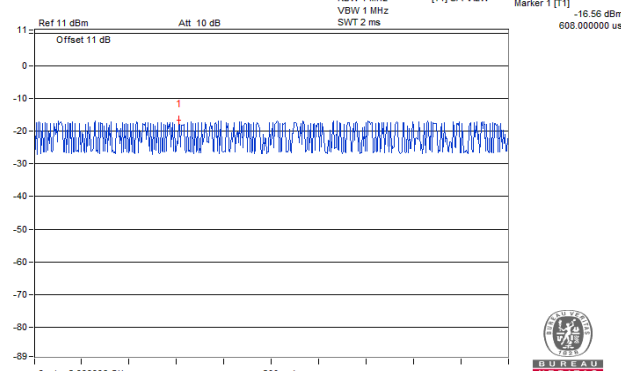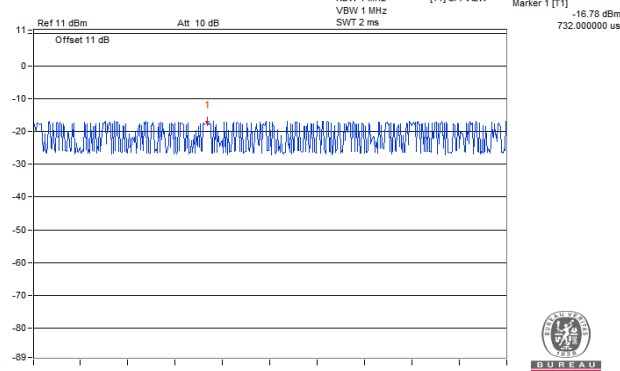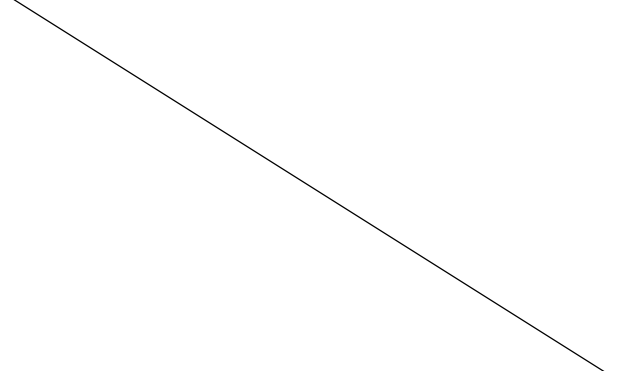	
1 2399.996MHz P = 8.763054uW	2 2399.998MHz P = 9.286168uW
	
3 2400.000MHz P = 9.627531uW	

4.4 Antenna Power Measurement

4.4.1 Limits of Antenna Power

Modulation Method	Frequency Band Used	Antenna Power (Max.)	EIRP Limit (Note 3)
DSSS	2400 – 2483.5 MHz	10mW/MHz	12.14 dBm/MHz ~ 22.14 dBm/MHz (16.368 mW/MHz ~ 163.68 mW/MHz)
OFDM (Note 1)	2400 – 2483.5 MHz	10mW/MHz	12.14 dBm/MHz ~ 22.14 dBm/MHz (16.368 mW/MHz ~ 163.68 mW/MHz)
OFDM (Note 2)	2400 – 2483.5 MHz	5mW/MHz	9.13 dBm/MHz ~ 19.13 dBm/MHz (8.184 mW/MHz ~ 81.846 mW/MHz)
Other than the above	2400 – 2483.5 MHz	10 mW	12.14 dBm ~ 22.14 dBm (16.368 mW ~ 163.68 mW)
Modulation System	Frequency Band Used	Antenna Power (Max.)	EIRP Limit
DS	2471 – 2497 MHz	10mW/MHz	12.14 dBm/MHz (16.368 mW/MHz)

Note:

1. Occupied bandwidth is less than 26MHz
2. Occupied bandwidth is more than 26MHz and less than 40MHz
3. EIRP limit is variable by the HPBA, the HPBA (half-power beam width) of the antenna shall be 360/A degrees or less, where $A = \text{EIRP} / (2.14 \text{ dBi} + \text{Antenna Power (limit)})$.
4. Tolerance of antenna power shall be +20% (upper value) and –80% (lower value).

4.4.2 Test Setup



4.4.3 Test Results

Test Voltage	Channel Number	Frequency (MHz)	Conducted RF Output Power (mW)	Radiated RF Output Power (mW)
V_{normal}	0	2402	3.148	13.710
	19	2440	3.162	13.771
	39	2480	3.206	13.963
V_{max.}	0	2402	3.105	13.523
	19	2440	3.090	13.457
	39	2480	3.062	13.335
V_{min.}	0	2402	3.243	14.124
	19	2440	3.083	13.427
	39	2480	3.097	13.488
Max. Limit (mW):			10	-
Rated Power (mW):			3.30	-
Tolerance of Antenna Power (mW):			0.66 ~ 3.96	-
Max. EIRP Limit (mW):			-	16.368


Note: 1. Antenna gain: 6.39dBi.
 2. The radiated RF output power is a “calculated” value derived from the conducted value.
 3. Formula: Radiated RF output power = Conducted RF output power + Antenna gain.

4.5 Spurious Emissions for Receiver

4.5.1 Limits of Spurious Emissions For Receiver

Frequencies (MHz)	Limit
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)


4.5.2 Test Setup

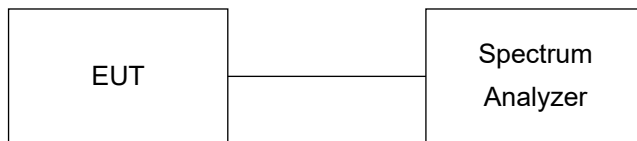


4.5.3 Test Result

Test Channel		CH 0 (2402MHz)			
Test Condition	Frequency Range (MHz)	Frequency (MHz)	Measured Value (nW)	Limit (nW)	Result
V_{normal}	30 to 1000	383.565	0.001618	4.0	Pass
	1000 to 12500	3738.437	0.015488	20.0	Pass
$V_{max.}$	30 to 1000	243.642	0.001439	4.0	Pass
	1000 to 12500	4967.500	0.012417	20.0	Pass
$V_{min.}$	30 to 1000	164.223	0.001549	4.0	Pass
	1000 to 12500	3560.187	0.014158	20.0	Pass
Test Channel		CH 19 (2440MHz)			
V_{normal}	30 to 1000	31.940	0.001384	4.0	Pass
	1000 to 12500	3604.750	0.012647	20.0	Pass
$V_{max.}$	30 to 1000	285.595	0.001496	4.0	Pass
	1000 to 12500	4452.875	0.013932	20.0	Pass
$V_{min.}$	30 to 1000	491.477	0.001514	4.0	Pass
	1000 to 12500	3758.562	0.014622	20.0	Pass
Test Channel		CH 39 (2480MHz)			
V_{normal}	30 to 1000	892.208	0.001496	4.0	Pass
	1000 to 12500	4875.500	0.018707	20.0	Pass
$V_{max.}$	30 to 1000	475.230	0.001300	4.0	Pass
	1000 to 12500	3492.625	0.014488	20.0	Pass
$V_{min.}$	30 to 1000	160.465	0.001346	4.0	Pass
	1000 to 12500	3531.437	0.016069	20.0	Pass


V_{normal}

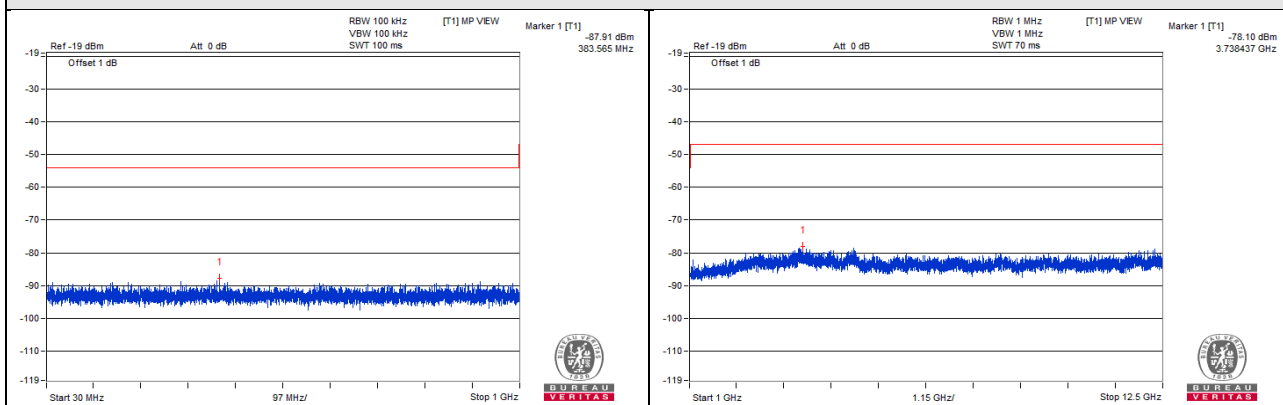

V_{max}

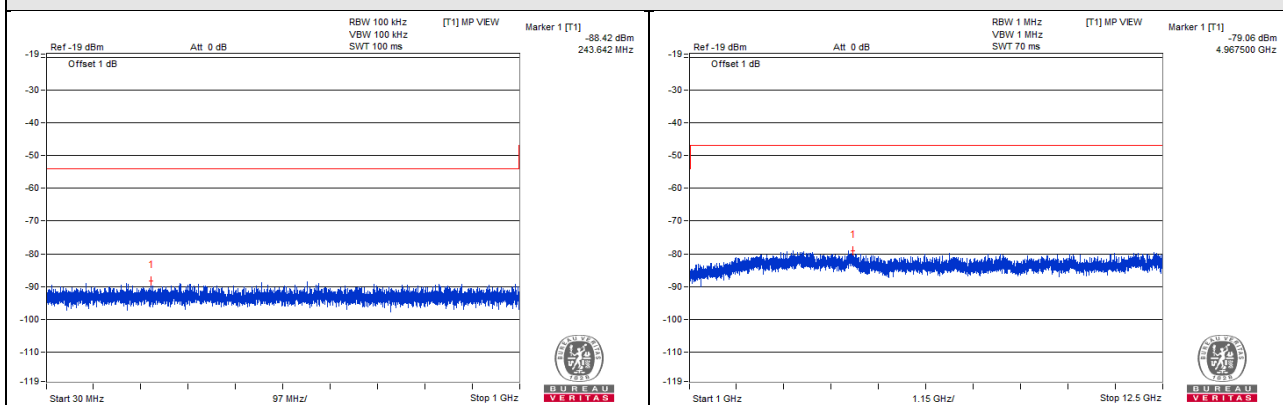


V_{min}

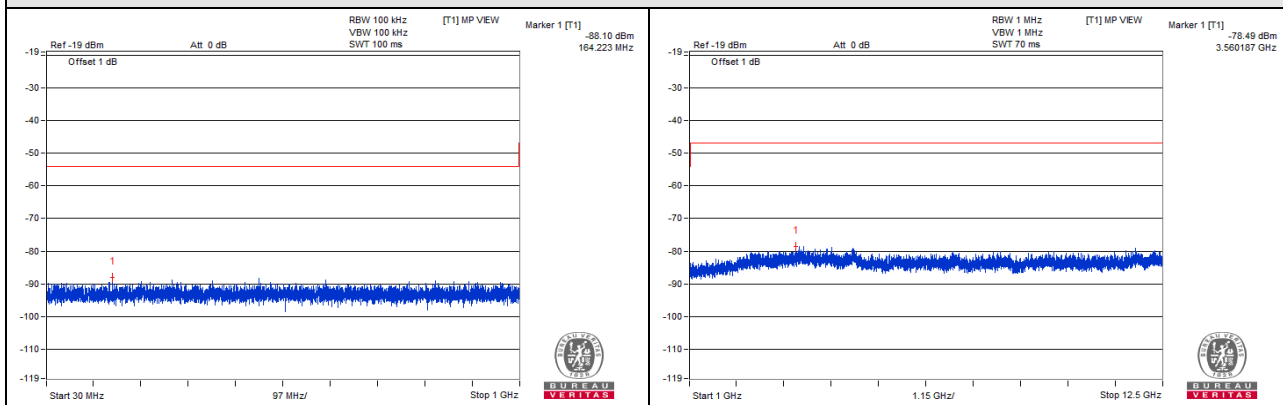


CH 0 (2402MHz)


V_{normal}

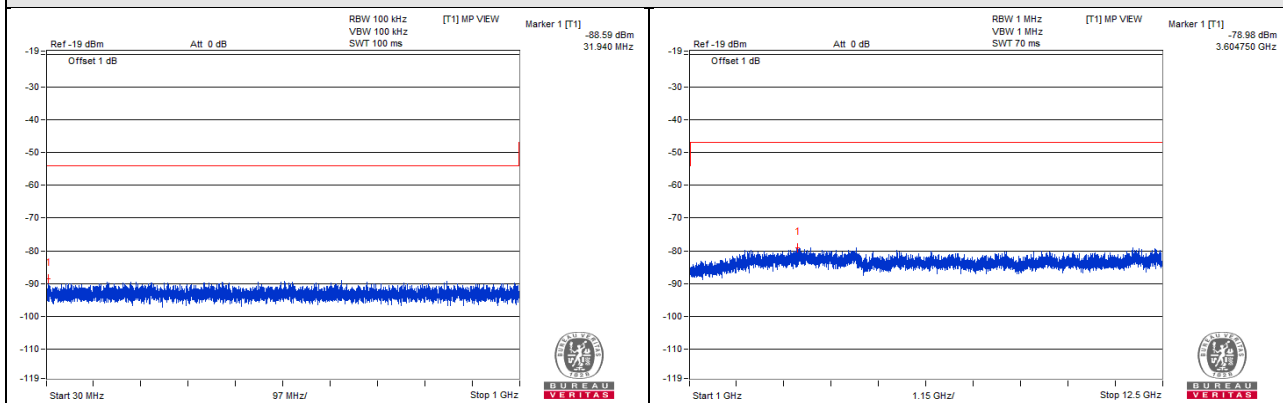

V_{max}

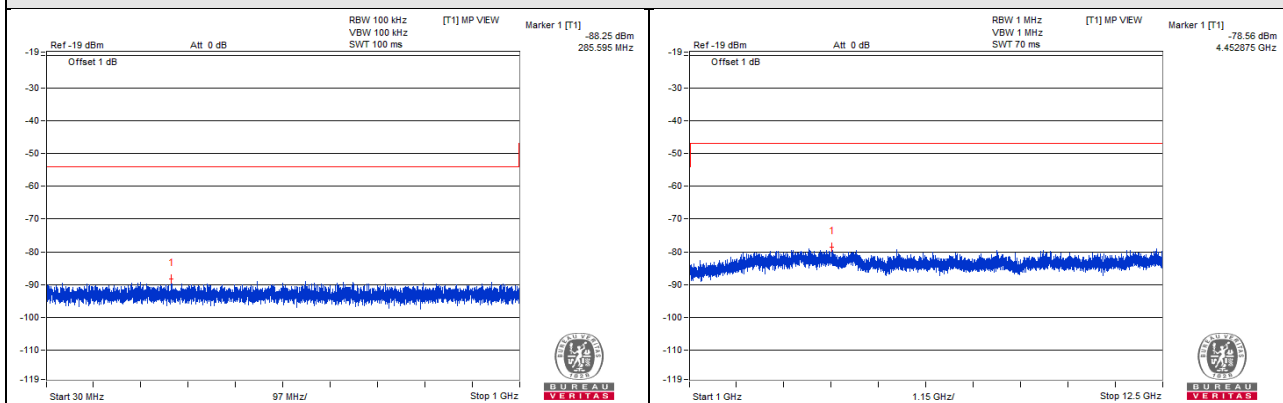


V_{min}

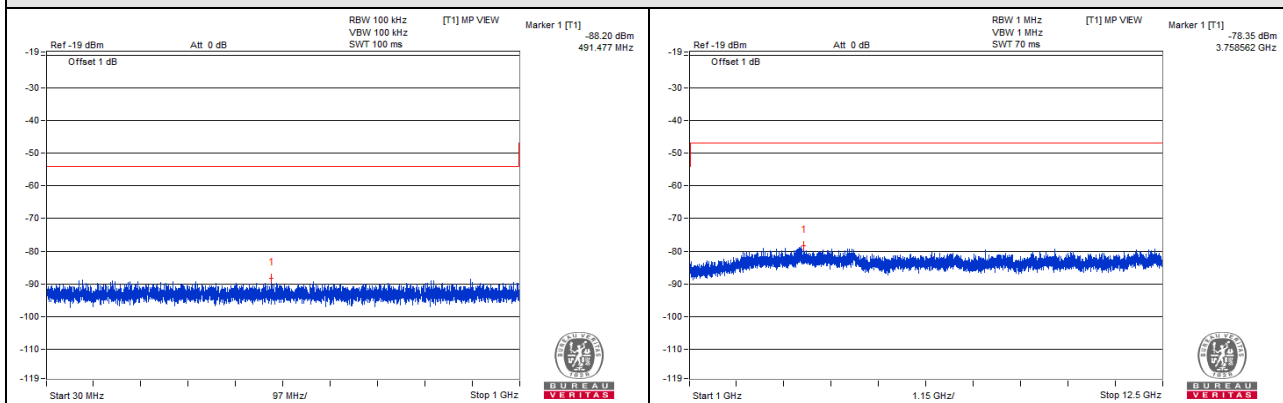


CH 19 (2440MHz)


V_{normal}

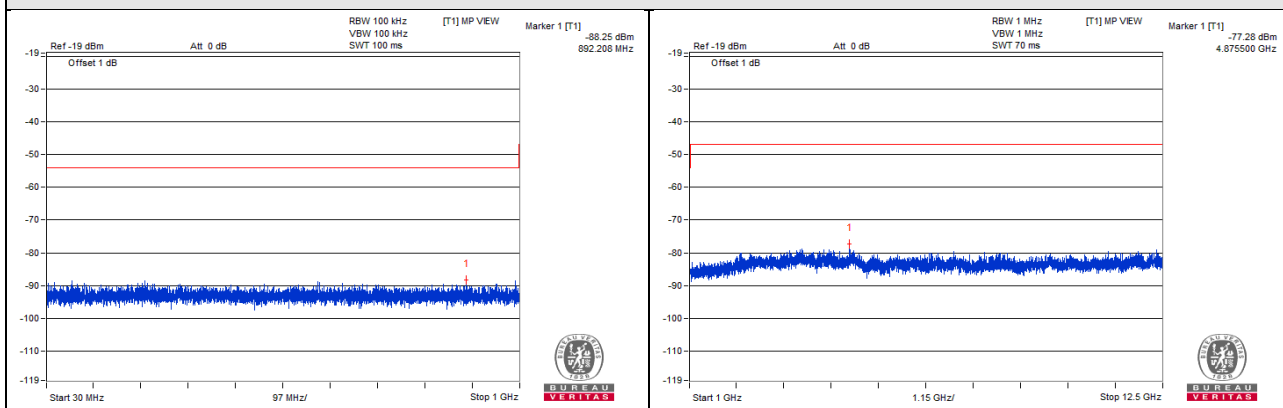

V_{max}

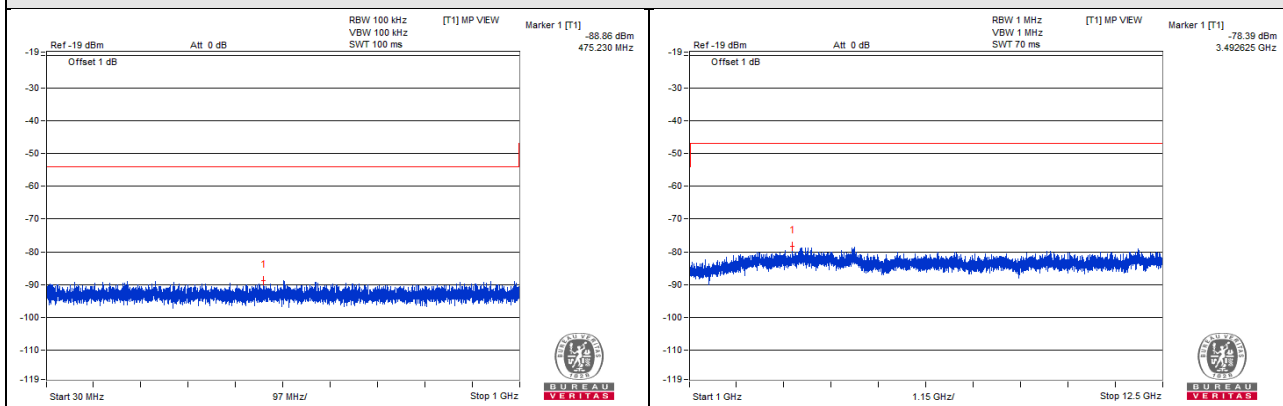

V_{min}

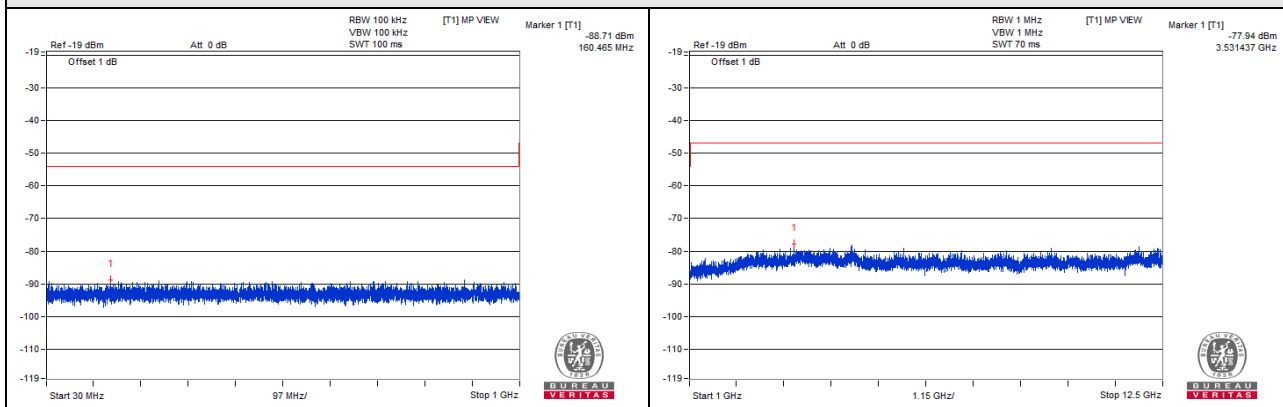


CH 39 (2480MHz)

4.6 Interference Prevention Function

4.6.1 Limits of Interference Prevention Function

NA


4.6.2 Test Setup

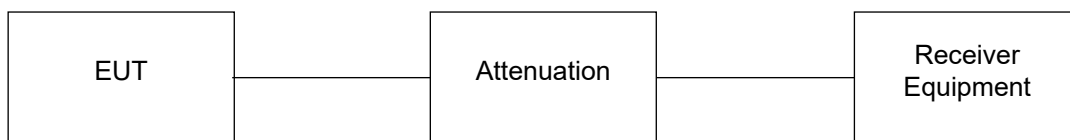

4.6.3 Test Results

Environmental Conditions	25 deg.C, 60% RH
Link Mode	Test Result
Bluetooth LE 4.0	Pass

5 Photographs of the Test Configuration

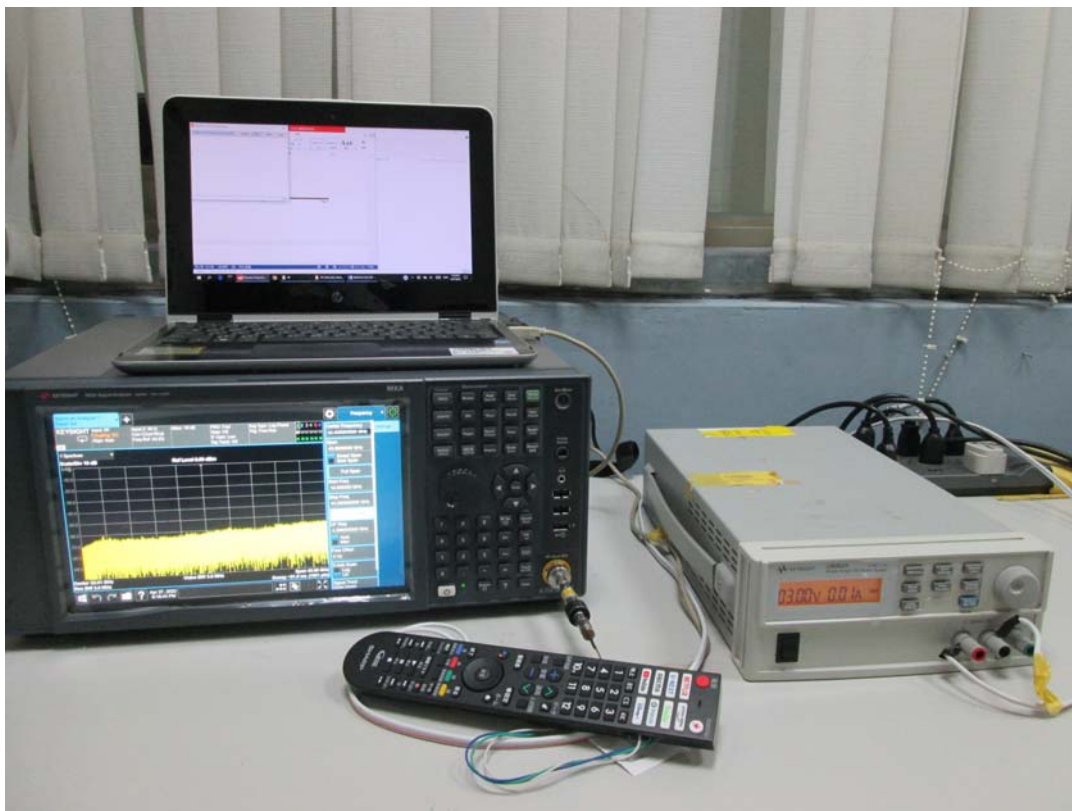

Appendix - Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---