

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	68.80	357.86	76.56	30MHz~1000MHz
	nW	0.0149	0.0142	0.0136	Limit ≤ 4 nW(-54 dBm)
	MHz	25900.00	25950.00	25400.00	1000MHz~26000MHz
	nW	1.6982	1.3428	1.2474	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH36

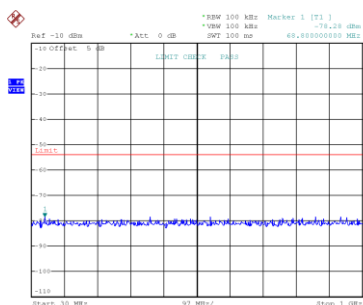


Date: 9_MAR,2023 17:41:36

CH40
f < 1GHz

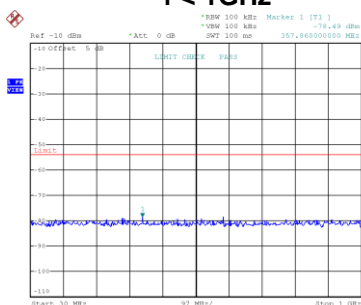


Date: 9_MAR,2023 17:41:55

CH48

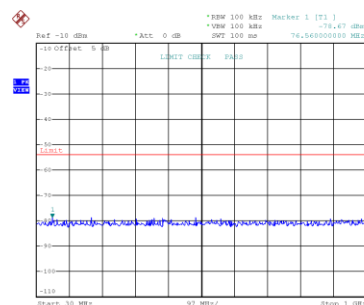


Date: 9_MAR,2023 17:42:14


f ≥ 1GHz

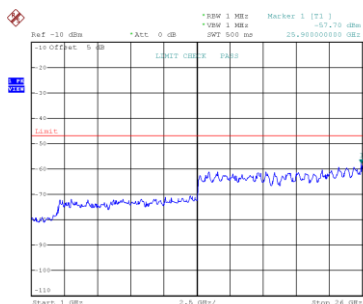

Date: 9_MAR,2023 17:41:45

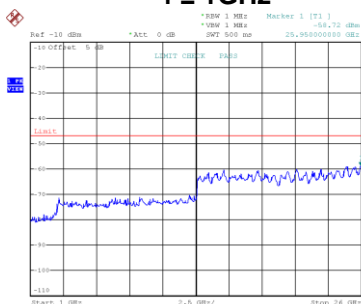

Date: 9_MAR,2023 17:42:03

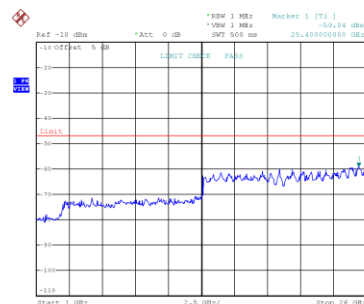

Date: 9_MAR,2023 17:42:23

Test Mode: IEEE 802.11ac(VHT20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	914.64	452.92	860.32	30MHz~1000MHz
	nW	0.0164	0.0156	0.0161	Limit ≤ 4 nW(-54 dBm)
	MHz	25450.00	26000.00	25950.00	1000MHz~26000MHz
	nW	1.4191	1.8072	1.3996	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH36

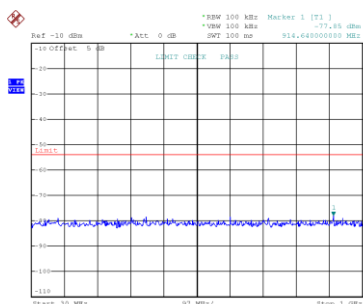


Date: 9.MAR.2023 17:46:08

CH40
f < 1GHz

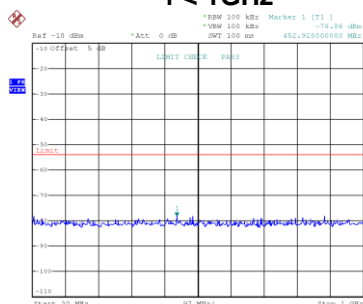


Date: 9.MAR.2023 17:46:27

CH48

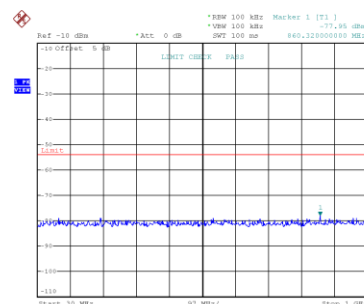


Date: 9.MAR.2023 17:46:46


f ≥ 1GHz

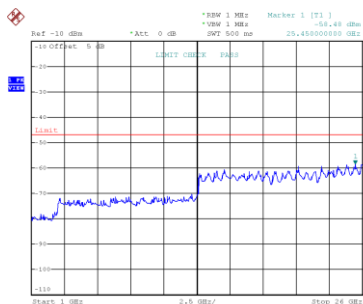

Date: 9.MAR.2023 17:46:17

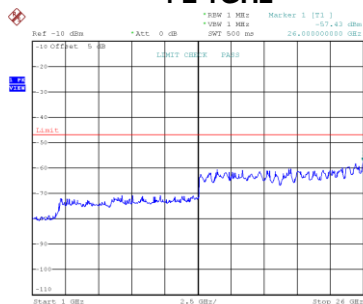

Date: 9.MAR.2023 17:46:36

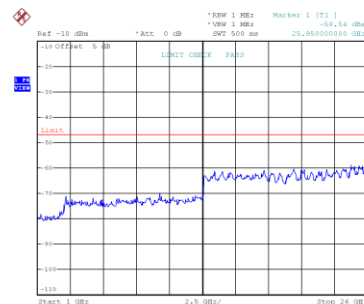

Date: 9.MAR.2023 17:46:55

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5180	5200	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	480.08	233.70	30MHz~1000MHz
	nW	0.0137	0.0142	Limit ≤ 4 nW(-54 dBm)
	MHz	24200.00	25350.00	1000MHz~26000MHz
	nW	1.6749	1.9953	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH38

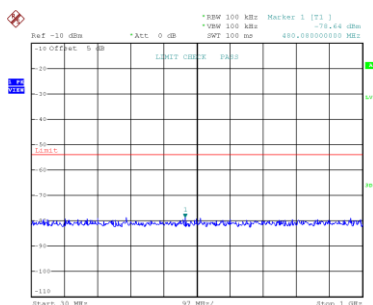


Date: 9_MAR_2023 17:15:124

CH46
f < 1GHz

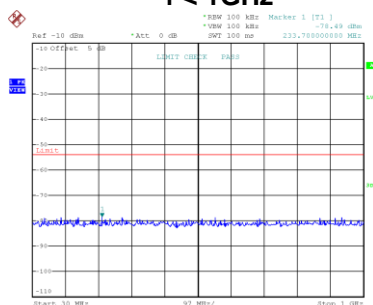


Date: 9_MAR_2023 17:15:143

f ≥ 1GHz

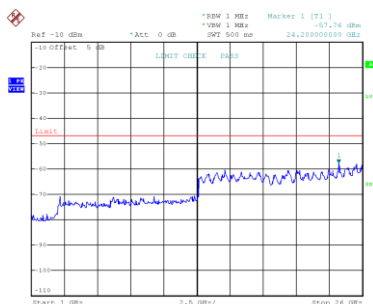

Date: 9_MAR_2023 17:15:133

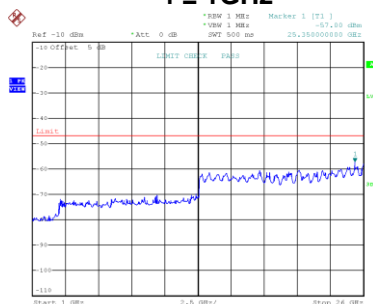

Date: 9_MAR_2023 17:15:152

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency	-	5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	970.90	30MHz~1000MHz
	nW	0.0148	Limit ≤ 4 nW(-54 dBm)
	MHz	25950.00	1000MHz~26000MHz
	nW	1.4060	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH42 f < 1GHz

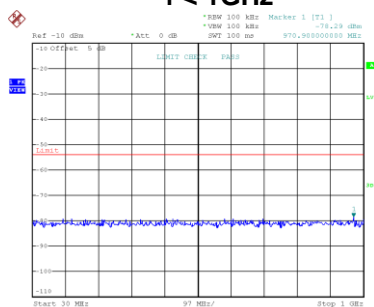

Date: 9_MAR_2023 17:59:07

f ≥ 1GHz

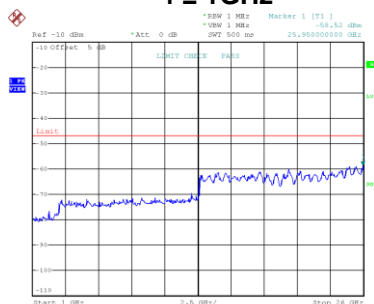

Date: 9_MAR_2023 17:59:15

Test Mode: IEEE 802.11ax(HE20) - W52

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5180	5200	5240	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	705.12	167.74	641.10	30MHz~1000MHz
	nW	0.0148	0.0133	0.0149	Limit ≤ 4 nW(-54 dBm)
	MHz	24750.00	26000.00	26000.00	1000MHz~26000MHz
	nW	1.5453	1.3868	1.3552	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH36

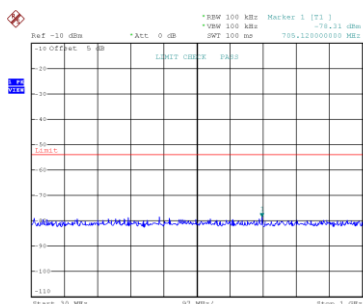


Date: 9.MAR.2023 17:51:10

CH40
f < 1GHz

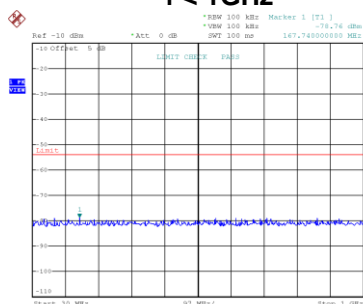


Date: 9.MAR.2023 17:51:29

CH48

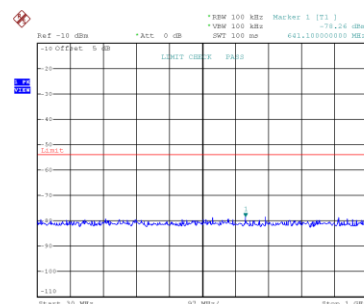


Date: 9.MAR.2023 17:51:47


f ≥ 1GHz

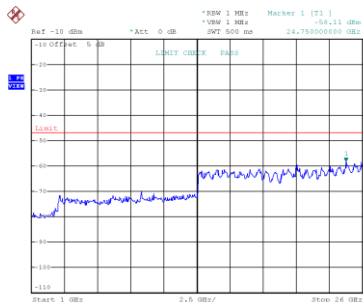

Date: 9.MAR.2023 17:51:19

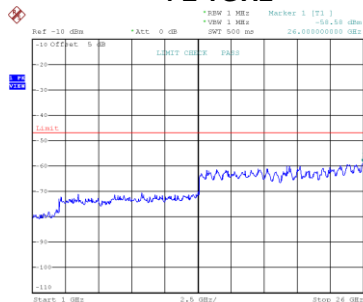

Date: 9.MAR.2023 17:51:37

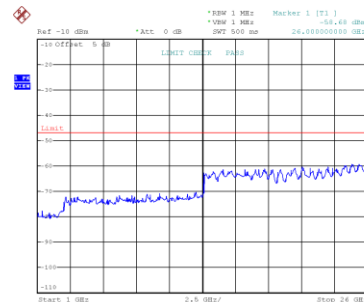

Date: 9.MAR.2023 17:51:56

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5190	5230	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	606.18	43.58	30MHz~1000MHz
	nW	0.0146	0.0161	Limit ≤ 4 nW(-54 dBm)
	MHz	25400.00	24900.00	1000MHz~26000MHz
	nW	1.5453	1.4689	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH38

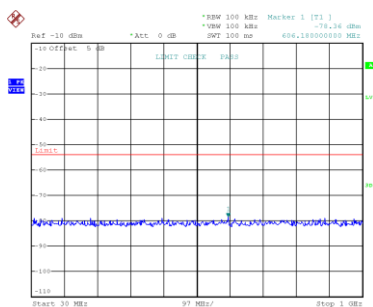


Date: 9_MAR_2023 17:15:42

CH46
f < 1GHz

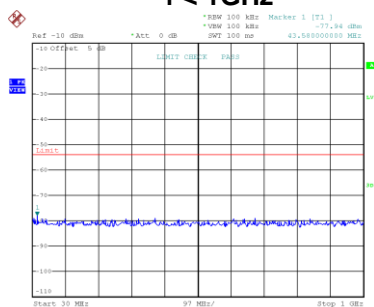


Date: 9_MAR_2023 17:15:100

f ≥ 1GHz

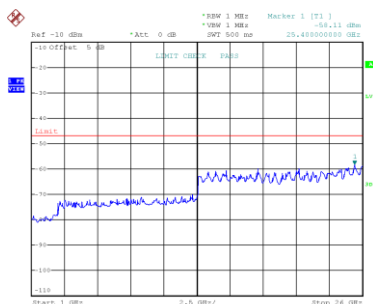

Date: 9_MAR_2023 17:15:50

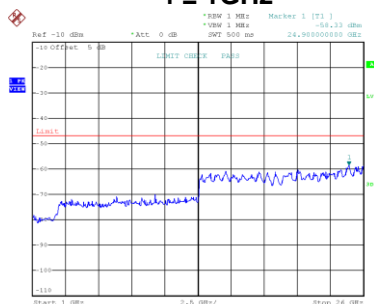

Date: 9_MAR_2023 17:15:109

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency	-	5210	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	518.88	30MHz~1000MHz
	nW	0.0155	Limit ≤ 4 nW(-54 dBm)
	MHz	25950.00	1000MHz~26000MHz
	nW	1.4355	Limit ≤ 20 nW(-47 dBm)

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)

X = the total number of antennas

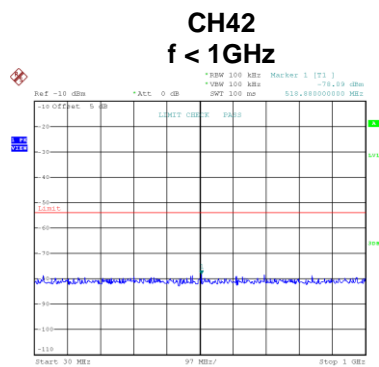

Date: 9_MAR_2023 18:00:49

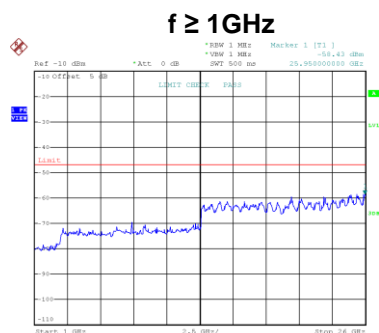

Date: 9_MAR_2023 18:00:58

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	144.46	631.40	866.14	30MHz~1000MHz
	nW	0.0151	0.0160	0.0021	Limit ≤ 4 nW(-54 dBm)
	MHz	25350.00	24950.00	24900.00	1000MHz~26000MHz
	nW	1.3459	1.2134	1.6788	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH52

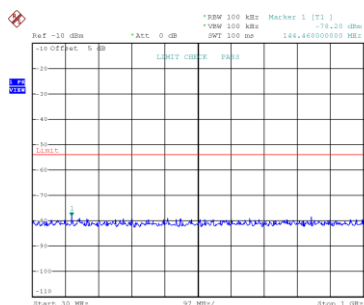


Date: 9.MAR.2023 17:44:00

CH60
f < 1GHz

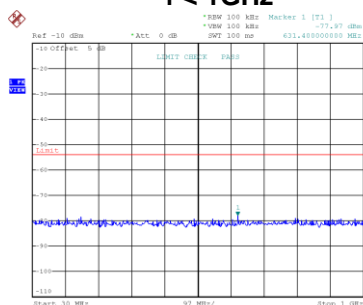


Date: 9.MAR.2023 17:44:19

CH64

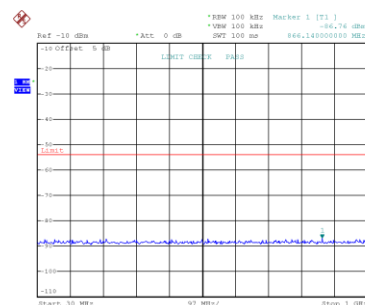


Date: 9.MAR.2023 17:44:39


f ≥ 1GHz

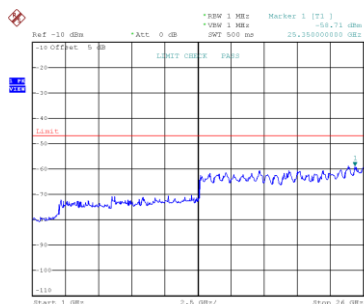

Date: 9.MAR.2023 17:44:09

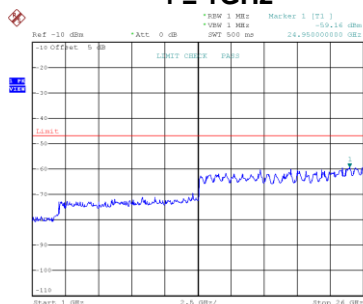

Date: 9.MAR.2023 17:44:27

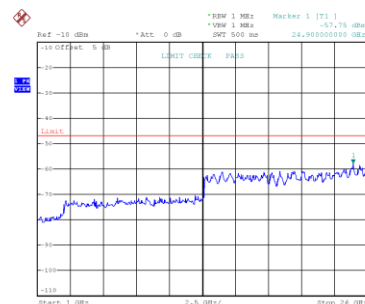

Date: 9.MAR.2023 17:44:48

Test Mode: IEEE 802.11ac(VHT20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	460.68	86.26	871.96	30MHz~1000MHz
	nW	0.0138	0.0168	0.0020	Limit ≤ 4 nW(-54 dBm)
	MHz	25000.00	25950.00	25400.00	1000MHz~26000MHz
	nW	1.3614	1.2190	1.8113	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH52

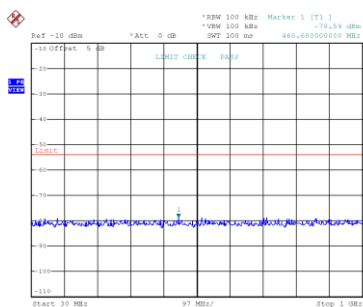


Date: 9.MAR.2023 17:47:06

CH60
f < 1GHz

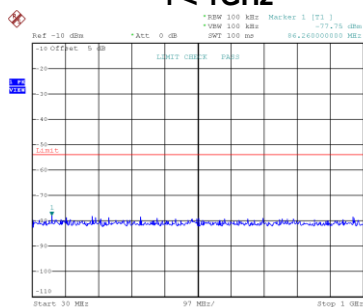


Date: 9.MAR.2023 17:47:26

CH64

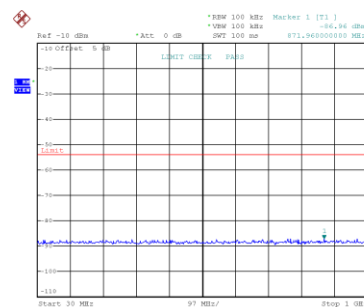


Date: 9.MAR.2023 17:47:46


f ≥ 1GHz

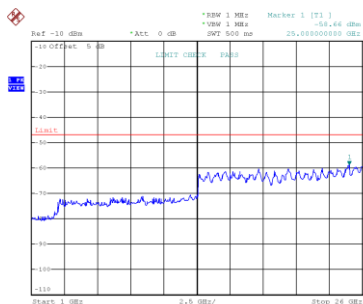

Date: 9.MAR.2023 17:47:15

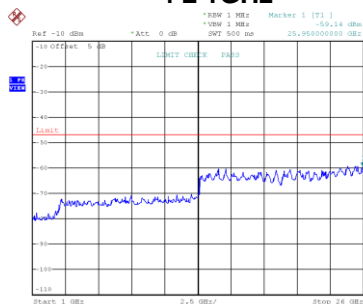

Date: 9.MAR.2023 17:47:35

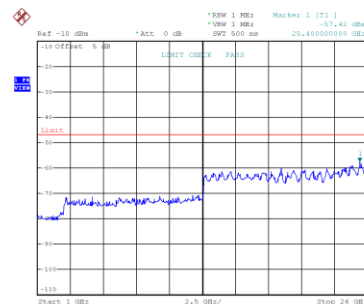

Date: 9.MAR.2023 17:47:55

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	321.00	639.16	30MHz~1000MHz
	nW	0.0138	0.0154	Limit ≤ 4 nW(-54 dBm)
	MHz	26000.00	24700.00	1000MHz~26000MHz
	nW	1.2823	1.3964	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH54

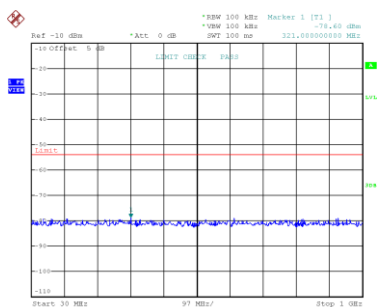


Date: 9_MAR_2023 17:55:02

CH62
f < 1GHz

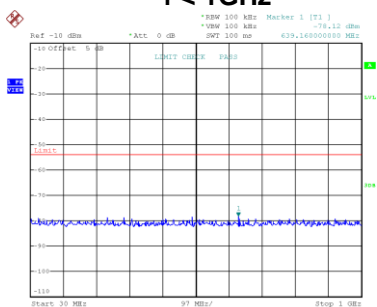


Date: 9_MAR_2023 17:55:20

f ≥ 1GHz

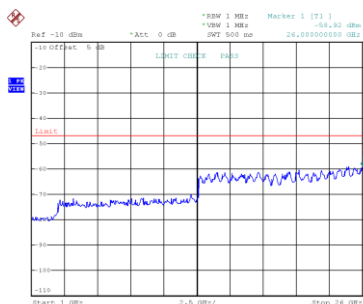

Date: 9_MAR_2023 17:55:10

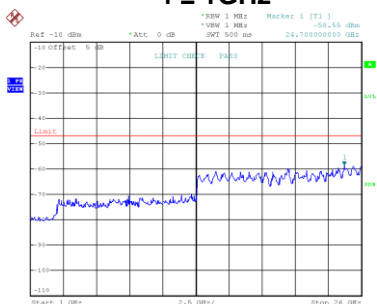

Date: 9_MAR_2023 17:55:29

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency	-	5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	255.04	30MHz~1000MHz
	nW	0.0134	Limit ≤ 4 nW(-54 dBm)
	MHz	25950.00	1000MHz~26000MHz
	nW	1.4322	Limit ≤ 20 nW(-47 dBm)

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)

X = the total number of antennas

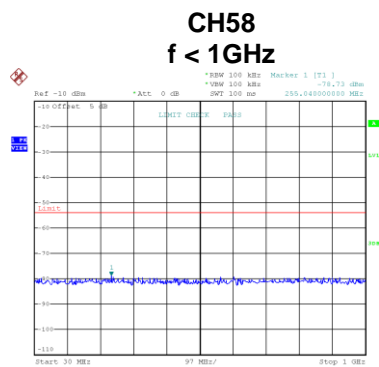

Date: 9_MAR_2023 17:59:26

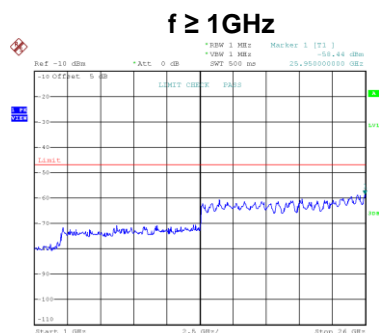

Date: 9_MAR_2023 17:59:35

Test Mode: IEEE 802.11ax(HE20) - W53

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5260	5300	5320	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	670.20	97.90	753.62	30MHz~1000MHz
	nW	0.0148	0.0140	0.0021	Limit ≤ 4 nW(-54 dBm)
	MHz	25950.00	26000.00	25950.00	1000MHz~26000MHz
	nW	1.3804	1.4894	1.3740	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH52

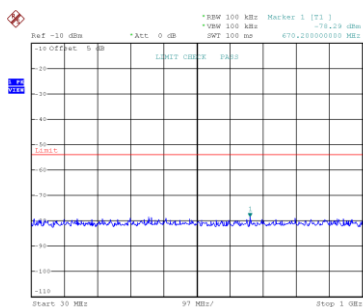


Date: 9.MAR.2023 17:52:07

CH60
f < 1GHz

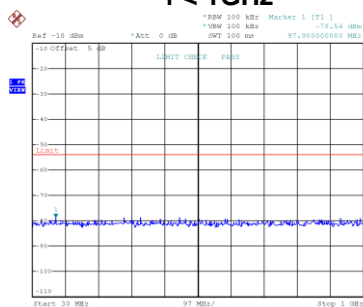


Date: 9.MAR.2023 17:52:26

CH64

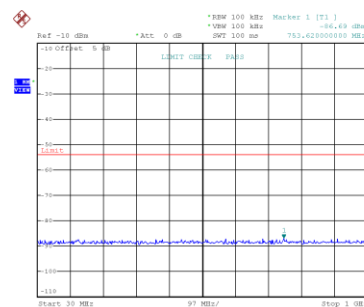


Date: 9.MAR.2023 17:52:46


f ≥ 1GHz

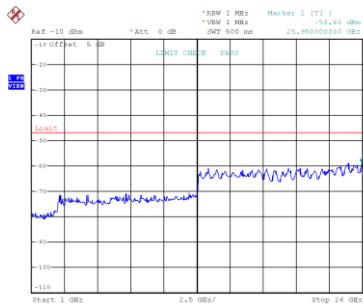

Date: 9.MAR.2023 17:52:16

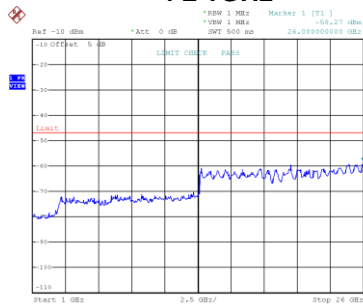

Date: 9.MAR.2023 17:52:35

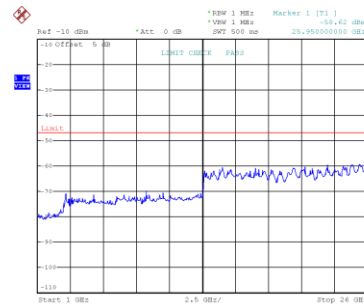

Date: 9.MAR.2023 17:52:54

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5270	5310	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	726.46	551.86	30MHz~1000MHz
	nW	0.0148	0.0156	Limit ≤ 4 nW(-54 dBm)
	MHz	24800.00	25350.00	1000MHz~26000MHz
	nW	1.7498	1.3122	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH54

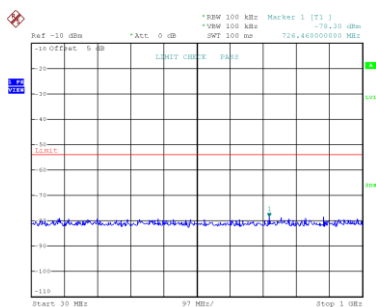


Date: 9_MAR_2023 17:57:20

CH62
f < 1GHz

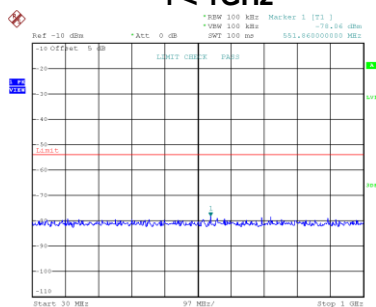


Date: 9_MAR_2023 17:57:38

f ≥ 1GHz

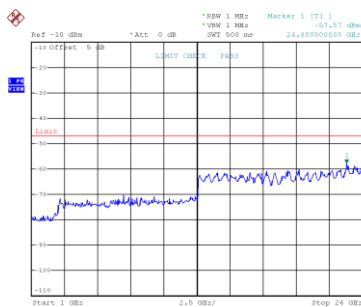

Date: 9_MAR_2023 17:57:28

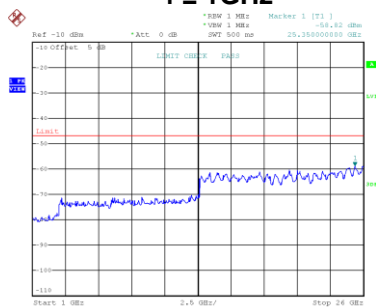

Date: 9_MAR_2023 17:57:47

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------


Test Voltage		Normal Voltage	Remarks
Test Frequency	-	5290	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	629.46	30MHz~1000MHz
	nW	0.0137	Limit ≤ 4 nW(-54 dBm)
	MHz	25900.00	1000MHz~26000MHz
	nW	1.6520	Limit ≤ 20 nW(-47 dBm)

Note:


Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)

X = the total number of antennas

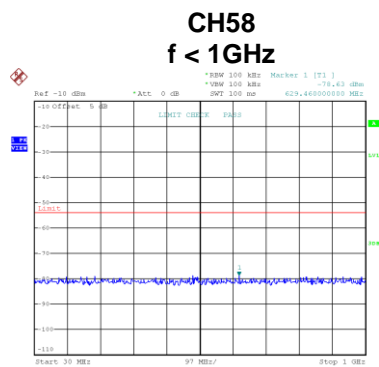

Date: 9_MAR_2023 18:01:08

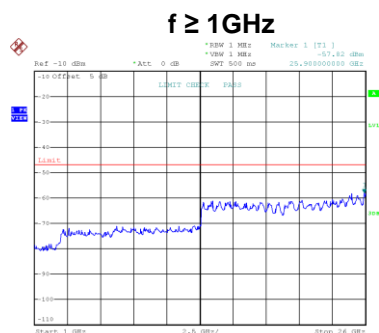

Date: 9_MAR_2023 18:01:16

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5500	5600	5700	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	410.24	115.36	652.74	30MHz~1000MHz
	nW	0.0172	0.0195	0.0160	Limit ≤ 4 nW(-54 dBm)
	MHz	24900.00	25900.00	26000.00	1000MHz~26000MHz
	nW	1.4388	1.3583	1.4223	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH100

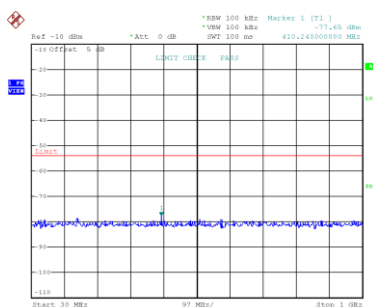


Date: 9.MAR.2023 17:44:58

CH120
f < 1GHz

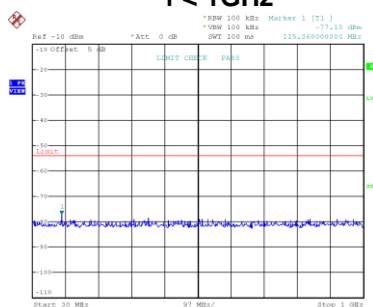


Date: 9.MAR.2023 17:45:18

CH140

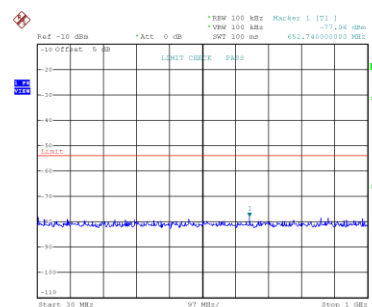


Date: 9.MAR.2023 17:45:38


f ≥ 1GHz

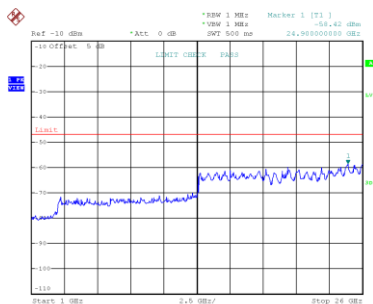

Date: 9.MAR.2023 17:45:07

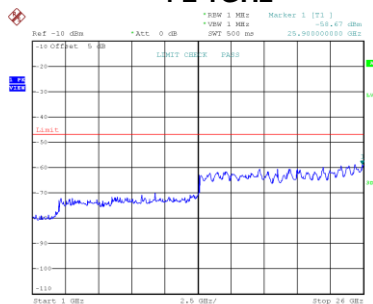

Date: 9.MAR.2023 17:45:26

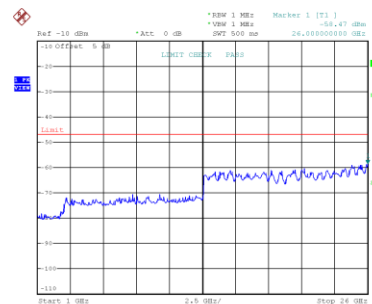

Date: 9.MAR.2023 17:45:47

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5500	5600	5700	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	288.02	967.02	579.02	30MHz~1000MHz
	nW	0.0128	0.0170	0.0170	Limit ≤ 4 nW(-54 dBm)
	MHz	25950.00	24900.00	24900.00	1000MHz~26000MHz
	nW	1.3459	1.5524	1.3804	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH100

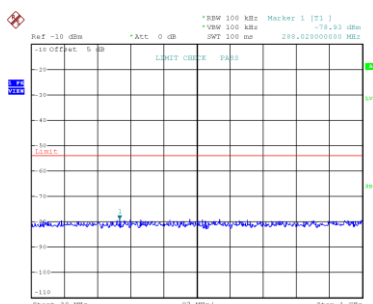


Date: 9.MAR.2023 17:50:05

CH120
f < 1GHz

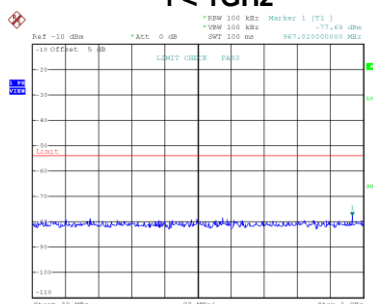


Date: 9.MAR.2023 17:50:24

CH140

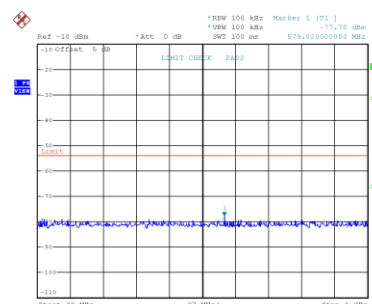


Date: 9.MAR.2023 17:50:42


f ≥ 1GHz

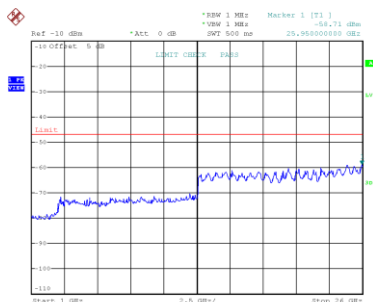

Date: 9.MAR.2023 17:50:14

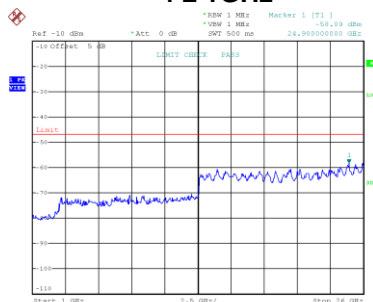

Date: 9.MAR.2023 17:50:32

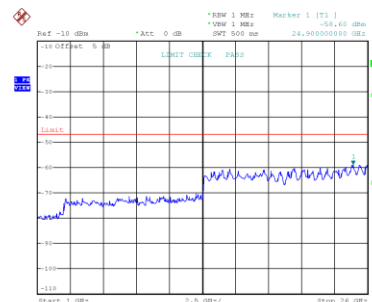

Date: 9.MAR.2023 17:50:51

Test Mode: IEEE 802.11ac(VHT40) - W56

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5510	5590	5670	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	235.64	699.30	282.20	30MHz~1000MHz
	nW	0.0156	0.0132	0.0150	Limit ≤ 4 nW(-54 dBm)
	MHz	24800.00	26000.00	26000.00	1000MHz~26000MHz
	nW	1.3274	1.4757	1.4928	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH102

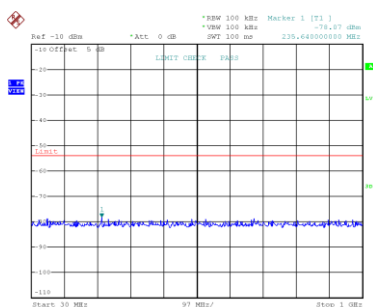


Date: 9.MAR.2023 17:55:39

CH118
f < 1GHz

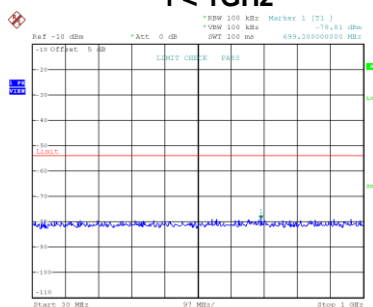


Date: 9.MAR.2023 17:55:58

CH134

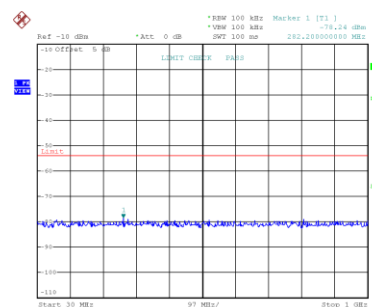


Date: 9.MAR.2023 17:56:17


f ≥ 1GHz

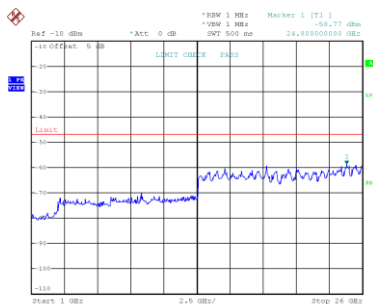

Date: 9.MAR.2023 17:55:48

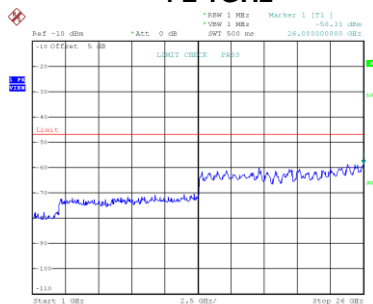

Date: 9.MAR.2023 17:56:07

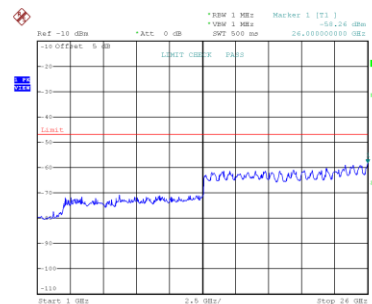

Date: 9.MAR.2023 17:56:26

Test Mode: IEEE 802.11ac(VHT80) - W56

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5530	5610	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	61.04	571.26	30MHz~1000MHz
	nW	0.0140	0.0154	Limit ≤ 4 nW(-54 dBm)
	MHz	26000.00	24800.00	1000MHz~26000MHz
	nW	1.3183	1.5812	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH106

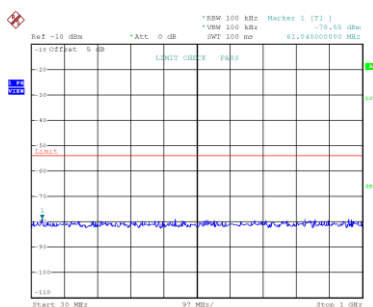


Date: 9.MAR.2023 17:59:47

CH122
f < 1GHz

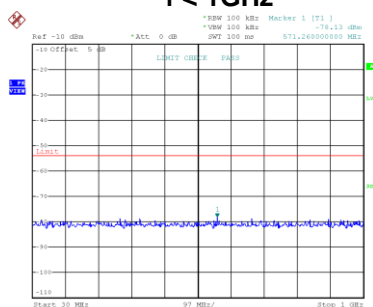


Date: 9.MAR.2023 18:00:05

f ≥ 1GHz

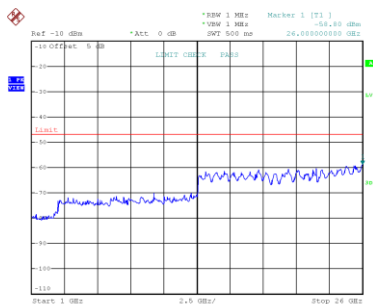

Date: 9.MAR.2023 17:59:55

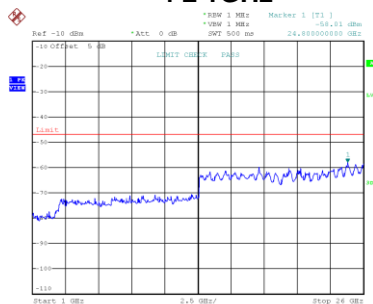

Date: 9.MAR.2023 18:00:14

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5500	5600	5700	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	561.56	887.48	734.22	30MHz~1000MHz
	nW	0.0146	0.0144	0.0162	Limit ≤ 4 nW(-54 dBm)
	MHz	25400.00	25400.00	26000.00	1000MHz~26000MHz
	nW	1.4723	1.4928	1.4454	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH100

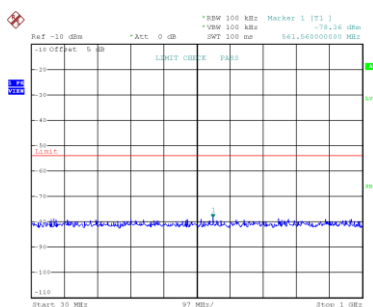


Date: 9.MAR.2023 17:53:05

CH120
f < 1GHz

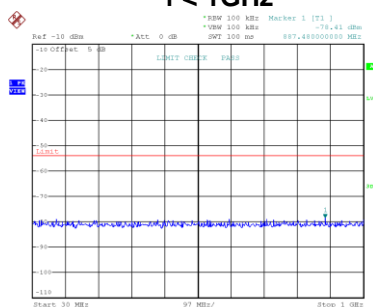


Date: 9.MAR.2023 17:53:25

CH140

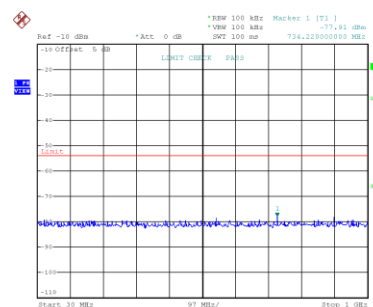


Date: 9.MAR.2023 17:53:44


f ≥ 1GHz

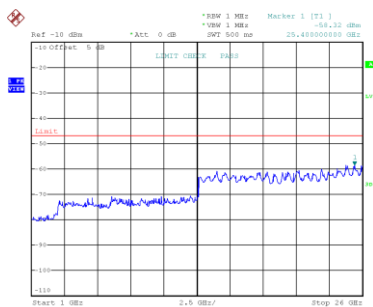

Date: 9.MAR.2023 17:53:14

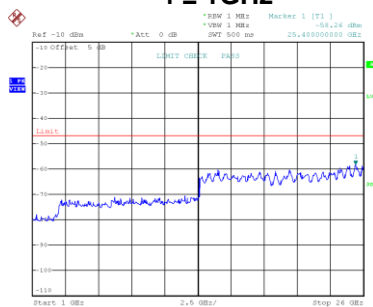

Date: 9.MAR.2023 17:53:34

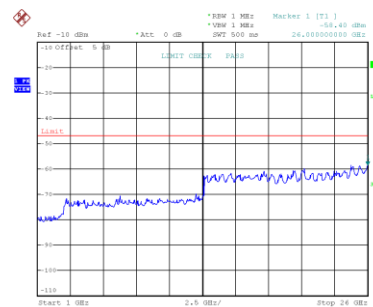

Date: 9.MAR.2023 17:53:53

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	-	5510	5590	5670	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	187.14	305.48	119.24	30MHz~1000MHz
	nW	0.0135	0.0135	0.0136	Limit ≤ 4 nW(-54 dBm)
	MHz	24850.00	24850.00	24800.00	1000MHz~26000MHz
	nW	1.3614	1.6293	1.5596	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH102

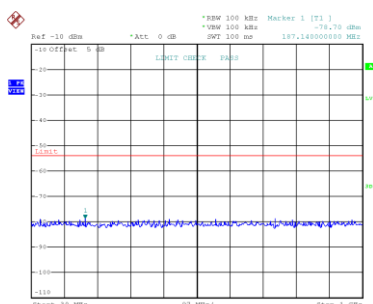


Date: 9.MAR.2023 17:15:17

CH118
f < 1GHz

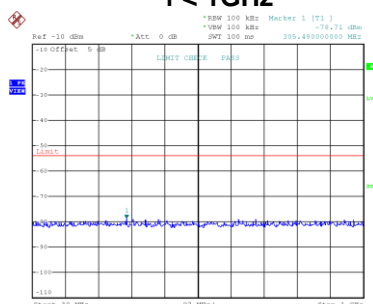


Date: 9.MAR.2023 17:15:16

CH134

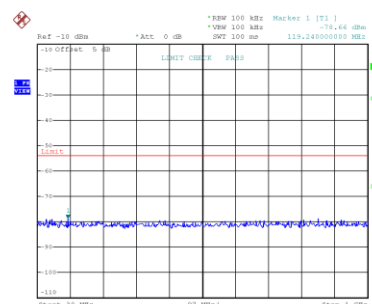


Date: 9.MAR.2023 17:15:15


f ≥ 1GHz

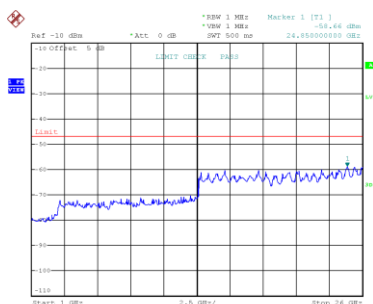

Date: 9.MAR.2023 17:15:06

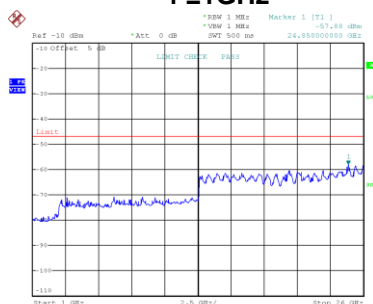

Date: 9.MAR.2023 17:15:25

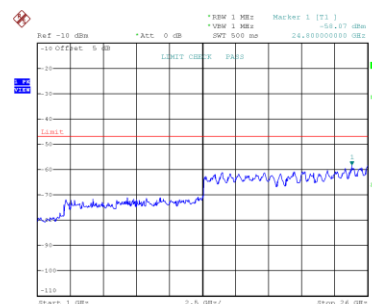

Date: 9.MAR.2023 17:15:44

Test Mode: IEEE 802.11ax(HE80) - W56

Test Voltage		Normal Voltage		Remarks
Test Frequency	-	5530	5610	Low/Mid/High of test frequency range
Limitation of Collateral Emission of Receiver	MHz	163.86	870.02	30MHz~1000MHz
	nW	0.0147	0.0147	Limit ≤ 4 nW(-54 dBm)
	MHz	26000.00	20400.00	1000MHz~26000MHz
	nW	1.6788	1.3772	Limit ≤ 20 nW(-47 dBm)


Note:

Emission value = SA measurement value + Directional gain + cable loss

Directional gain = 10 log (Ant X)


X = the total number of antennas

CH106

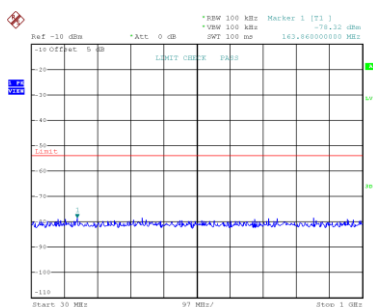


Date: 9.MAR.2023 18:01:26

CH122
f < 1GHz

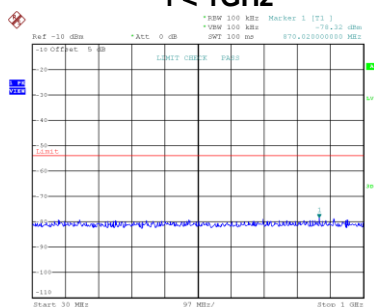


Date: 9.MAR.2023 18:01:45

f ≥ 1GHz

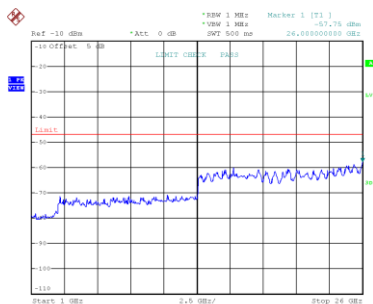

Date: 9.MAR.2023 18:01:35

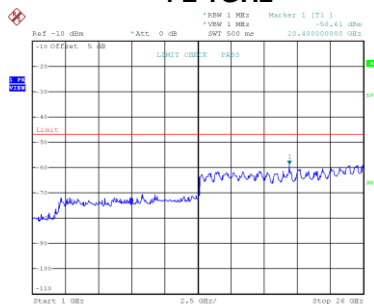

Date: 9.MAR.2023 18:01:54

APPENDIX G - TRANSMISSION BURST LENGTH

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	1.98	1.98	1.98	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5190	5230	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5210		Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44		Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W52
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5190	5230	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------

Test Voltage		Normal Voltage	Remarks
Test Frequency	MHz	5210	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	1.98	1.98	1.98	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5270	5310		Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44		Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5290			Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44			Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W53
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5270	5310	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5290		Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46		Limit ≤ 8msec

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test frequency range
Transmission Burst Length	msec	1.98	1.98	1.98	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5510	5590	5670	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ac(VHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5530	5610		Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.44	5.44	5.44	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5510	5590	5670	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	5.46	Limit ≤ 8msec

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5530	5610	Low/Mid/High of test frequency range
Transmission Burst Length	msec	5.46	5.46	Limit ≤ 8msec

APPENDIX H - CARRIER SENSE CAPABILITY

Test Mode:	IEEE 802.11a - W52
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W52
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5190	5230	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W52
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5210		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W52
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5180	5200	5240	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5190	5230	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W52
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5210		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11a - W53
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W53
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5270	5310	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W53
------------	----------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5290		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W53
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5260	5300	5320	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5270	5310	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W53
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5290		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK		Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11a - W56
------------	--------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT20) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT40) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5510	5590	5670	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ac(VHT80) - W56
------------	----------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5530	5610		Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE20) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5500	5600	5700	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE40) - W56
------------	---------------------------

Test Voltage		Normal Voltage			Remarks
Test Frequency	MHz	5510	5590	5670	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

Test Mode:	IEEE 802.11ax(HE80) - W56
------------	---------------------------

Test Voltage		Normal Voltage		Remarks
Test Frequency	MHz	5530	5610	Low/Mid/High of test level
Carrier Sense (100mV/m)	OK / NG	OK	OK	Pin = 22.79+Gr-20*log(freq_MHz) [dBm]

End of Test Report