



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

# TEST REPORT

## Ordinance Article 2 paragraph 1 item (19)

Report Reference No. .... CTL2009308011-MIC

Compiled by:  
( position+printed name+signature)

Happy Guo  
(File administrators)

Happy Guo

Tested by:  
( position+printed name+signature)

Nice Nong  
(Test Engineer)

Nice Nong

Approved by:  
( position+printed name+signature)

Ivan Xie  
(Manager)

Ivan Xie

Product Name ..... Remote control

Model/Type reference ..... AD016

List Model(s) ..... N/A

Trade Mark ..... WPL

Applicant's name ..... 株式会社 RAYWOOD ( RAYWOOD INC )

Address of applicant ..... 東京都世田谷区駒沢 2-11-1 集花園ビル 4 階 ( Komazawa 2-11-1, Setagaya, Tokyo, Japan )

Test Firm ..... Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm ..... Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification .....

Standard ..... Ordinance Article 2 paragraph 1 item (19)

TRF Originator ..... Shenzhen CTL Testing Technology Co., Ltd.

Master TRF ..... Dated 2011-01

Date of receipt of test item ..... Oct. 20, 2020

Date of sampling ..... Oct. 20, 2020

Date of Test Date ..... Oct. 20, 2020 - Oct. 23, 2020

Date of Issue ..... Oct. 26, 2020

Result ..... Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

Test Report No. :	CTL2009308011-MIC	Oct. 26, 2020 Date of issue
-------------------	-------------------	--------------------------------

Equipment under Test : Remote control

Sample No : CTL200930801-1-S001

Model /Type : AD016

Listed Models : N/A

Applicant : 株式会社 RAYWOOD ( RAYWOOD INC )

Address : 東京都世田谷区駒沢 2-11-1 集花園ビル 4 階  
( Komazawa 2-11-1, Setagaya, Tokyo, Japan )

Manufacturer : Youyoulong Toys Co., Ltd.

Address : Lianxia Zhen Yun Er Xi Ping Industrial Zone,  
Chenghai District, Shantou City, Guangdong  
Province, China

Test result	Pass *
-------------	--------

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

[illegible]

## Table of Contents

## Page

<b>1. SUMMARY.....</b>	<b>5</b>
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY .....	6
1.4. MEASUREMENT UNCERTAINTY .....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. ENVIRONMENTAL CONDITIONS .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. DESCRIPTION OF TEST MODES .....	8
2.4. MEASUREMENT INSTRUMENTS LIST .....	8
<b>3. TEST CONDITIONS AND RESULTS .....</b>	<b>9</b>
3.1. FREQUENCY ERROR.....	9
3.2. ANTENNA OUTPUT POWER AND OUTPUT POWER TOLERANCE.....	10
3.3. OCCUPIED BANDWIDTH AND SPREADING BANDWIDTH .....	11
3.4. UNWANTED EMISSION STRENGTH .....	12
3.5. SECONDARY RADIATED EMISSION STRENGTH .....	13
3.6. CONSTRUCTION PROTECTION METHOD.....	14
3.7. INTERFERENCE PREVENTION FUNCTION .....	15
<b>4. TEST SETUP PHOTOS OF THE EUT .....</b>	<b>16</b>
<b>5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>17</b>

## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[MIC Notice No.88 Appendix No.43](#)

### 1.2. Test Description

Test Item	Result
Frequency Error	Pass
Antenna Output Power and Output Power Tolerance	Pass
Occupied Bandwidth and Spread spectrum bandwidth	Pass
Dwell time	N/A Note 1
Unwanted Emission Strength	Pass
Secondary Radiated Emission Strength	Pass
Construction protection method	Pass
Interference Prevention Function	Pass

Note1: Only applicable to HFSS system.



### 1.3. Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shaheji Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L7497**

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No. 4343.01**

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **IC Registration No.: 9618B**

##### **CAB identifier: CN0041**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

##### **FCC-Registration No.: 399832**

##### **Designation No.: CN1216**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

### 1.4. Measurement Uncertainty

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR100028-1 [2] and shall correspond to an expansion factor (coverage factor)  $K=1.96$  or  $K=2$  (which provide confidence levels of respectively 95% and 95.5% in the case where the distributions characterizing the actual measurement uncertainties are normal.

Parameter	Uncertainty
Frequency error / 99%&90% bandwidth	$\pm 1.62 \times 10^{-6}$
Total RF power, conducted	$\pm 0.8\text{dB}$
Spurious emissions, conducted	$\pm 0.8\text{dB}$
DC and low frequency voltages	$\pm 0.05\%$
Humidity	$\pm 5\%$
Temperature	$\pm 1^\circ\text{C}$

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	Normal Voltage	Transmitter: DC 3.00V Receiver: DC 7.40V
	High Voltage	Transmitter: DC 3.45V Receiver: DC 8.51V
	Low Voltage	Transmitter: DC 2.55V Receiver: DC 6.29V
Other	Normal Temperature	25°C
	Relative Humidity	55 %
	Air Pressure	989 hPa

Note: As the EUT was powered by DC 3.00V from battery, and with the voltage stabilizing circuit used for the EUT, the output voltage floating not exceed  $\pm 1\%$  of nominal condition when working on extreme voltage, so all test performed at nominal voltage only.

### 2.2. General Description of EUT

Product Name:	Remote control
Model/Type reference:	AD016
Power supply:	Transmitter: DC 3.00V from battery Receiver: DC 7.40V from battery
Hardware version:	Transmitter: V1.0 Receiver: V1.0
Software version:	Transmitter: V1.0 Receiver: V1.0
<b>2.4G Wireless</b>	
Frequency band:	2400 MHz to 2483.5 MHz
Operating frequency:	2405MHz~2475MHz
Modulation type:	GFSK
Antenna type:	Monopole Antenna
Antenna gain:	2.10dBi

Note1: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Note 2: Antenna gain provided by the applicant.

## 2.3. Description of Test Modes

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

### Operation Frequency List :

Channel	Frequency (MHz)
01	2405
02	2445
03	2475

Note: Test performed at the lowest/middle/highest frequencies selected in the list above for EUT supported while working on specified mode.

## 2.4. Measurement Instruments List

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum Analyzer	Agilent	N9020A	US46220290	2020/05/14	2021/05/13
2	Spectrum Analyzer	Keysight	N9020A	MY53420874	2020/05/14	2021/05/13
3	Signal generator	Agilent	N5182A	MY50142850	2020/05/14	2021/05/13
4	Signal Generator	Agilent	N5182A	MY52420355	2020/05/15	2021/05/14
5	Power Sensor	Agilent	U2021XA	MY55130004	2020/05/14	2021/05/13
6	Power Sensor	Agilent	U2021XA	MY55130006	2020/05/14	2021/05/13
7	Power Sensor	Agilent	U2021XA	MY54510008	2020/05/14	2021/05/13
8	Power Sensor	Agilent	U2021XA	MY55060003	2020/05/14	2021/05/13
Test Software						
Name of Software				Version		
TST-PASS				1.0.5		

Note: Calibration by the calibration agencies listed in the table correspond to paragraph 4 (ii) (c) of Article 24-2 in the Radio Law".




### 3. Test conditions and Results

#### 3.1. Frequency Error

##### LIMIT

±50ppm

##### TEST CONFIGURATION



##### TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: non-modulation

Spectrum Condition:

- Frequency: test frequency
- Span: 1 MHz
- RBW: 10 KHz
- VBW: 10 KHz
- Sweep time: Auto
- Detector mode: Positive peak
- Indication mode: max hold

##### TEST RESULTS

Raw data reference to Section 1 from Appendix.

### 3.2. Antenna Output Power and Output Power Tolerance

#### LIMIT

- $\leq 3 \text{ mW /MHz}$  (FHSS from 2402-2480 MHz)
- $\leq 10 \text{ mW/MHz}$  (OFDM, DSSS from 2400-2483.5 MHz)
- $\leq 10 \text{ mW}$  (other from 2400-2483.5 MHz)


The Output Power Tolerance must be within +20%, -80%.

E.i.r.p:

- $\leq 12.14 \text{ dBm/MHz}$  (OFDM, DS form 2400-2483.5 MHz)

Note: E.I.R.P will not be applied to the transmission antenna which has a gain of 2.14dBi or less.

#### TEST CONFIGURATION



#### TEST PROCEDURE

Step 1:

Connect the UUT to the spectrum analyzer as TEST CONFIGURATION and use the following settings:

- Centre Frequency: The centre frequency of the channel under test.
- RBW: 1 MHz
- VBW: 1 MHz
- Span: Wide enough to cover the complete power envelope of the signal of the UUT.
- Detector: Peak
- Trace Mode: Max Hold

Step 2:

When the trace is complete, find the peak value of the power envelope and record the frequency.

Step 3:

Make the following changes to the settings of the spectrum analyzer:

- Centre Frequency: Equal to the frequency recorded in step 2.
- Span: 0 MHz
- RBW: 1 MHz
- VBW: 1 MHz
- Detector: RMS
- Trace Mode: Clear Write

#### TEST RESULTS


Raw data reference to Section 4 from Appendix.

### 3.3. OCCUPIED BANDWIDTH AND SPREADING BANDWIDTH

#### LIMIT

- Occupied bandwidth: FH $\leq$ 83.5 MHz; OFDM $\leq$ 40 MHz, DS $\leq$ 26 MHz; Others $\leq$ 26 MHz
- Spread Bandwidth: $\geq$  500 kHz(FH,DS)
- Spread factor $>$ 5.

#### TEST CONFIGURATION



#### TEST PROCEDURE

1. Setting of SA is following as follow:
  - RBW: under 3% of OBW
  - VBW: = RBW
  - Sweep time: Auto
  - Sweep Mode: Continuous sweep
  - Detect mode: Positive peak
  - Trace mode: Max hold
2. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.
3. EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 90% of occupied bandwidth to measure spread bandwidth.
4. Spread Factor=Spread Bandwidth/modulation rate. The modulation rate: MR=1Mbps (declare by client)

#### TEST RESULTS

Raw data reference to Section 2 and Section 3 from Appendix.

### 3.4. Unwanted Emission Strength

#### LIMIT


Below 2387 MHz: 2.5 $\mu$ W/MHz or less

2387 to 2400 MHz: 25 $\mu$ W/MHz or less

2483.5 Through 2496.5 MHz: 25 $\mu$ W/MHz or less

Over 2496.5 MHz: 2.5 $\mu$ W/MHz or less

#### TEST CONFIGURATION



#### TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

- Frequency: 30MHz-13GHz
- RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- Sweep time: Auto
- Detector mode: Positive peak
- Indication mode: max hold

#### TEST RESULTS

Raw data reference to Section 5 from Appendix.




### 3.5. Secondary Radiated Emission Strength

#### LIMIT

Below 1GHz: 4.0nW or less

Above 1GHz: 20nW or less

#### TEST CONFIGURATION



#### TEST PROCEDURE

The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

EUT Condition: modulation

Spectrum Condition:

- Frequency: 30MHz-13GHz
- RBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- VBW: 100 KHz (30MHz-1GHz), 1MHz (1GHz-12.5GHz)
- Sweep time: Auto
- Detector mode: Positive peak
- Indication mode: max hold

#### TEST RESULTS

Raw data reference to Section 6 from Appendix.

### 3.6. Construction protection method

#### Requirement

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily

#### Confirmation method

And all high-frequency section and modulation section was packaged in one IC.

### 3.7. Interference Prevention Function

#### Requirement

Clarify, the one automatically to transmit and to receive identification code with the wireless equipment of the wireless station used in the same premises.

#### Interference Prevention Function Confirm

A communication link was made where the ID code is correct (Identical).



#### TEST PROCEDURE

1. Connect the EUT in network
2. Open the software
3. We can get the information as follows:

#### TEST RESULTS

MAC: C1:35:B2:1A:4C:62

#### 4. Test Setup Photos of the EUT

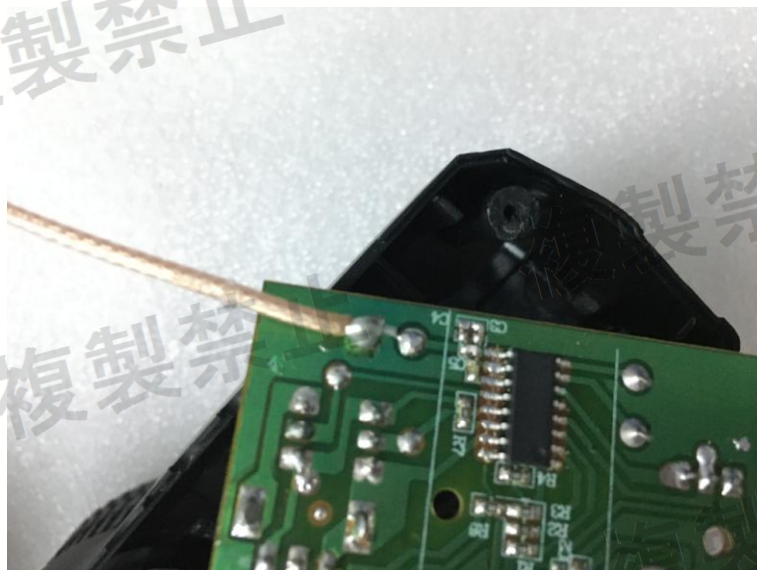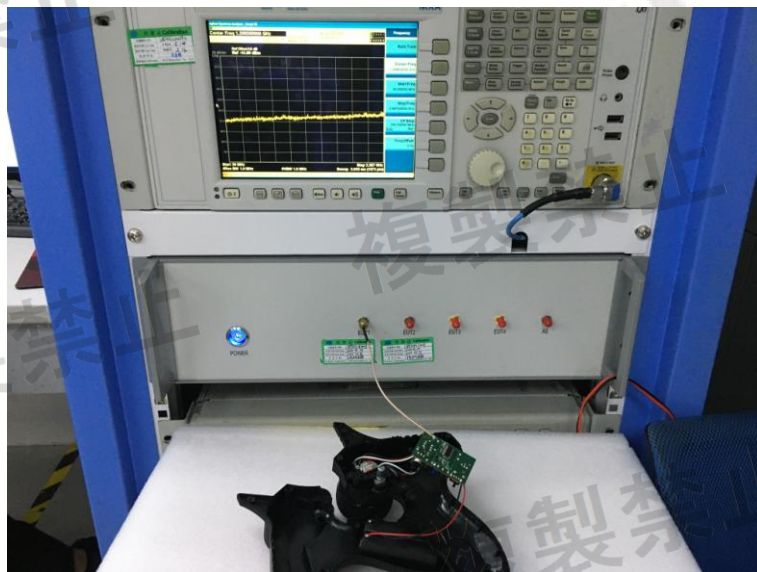




## 5. External and Internal Photos of the EUT

### External Photos of EUT




Transmitter





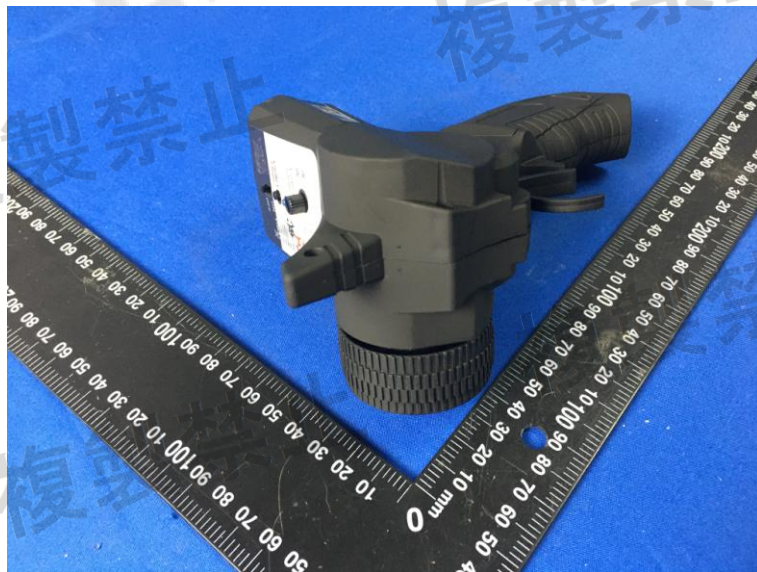

Receiver

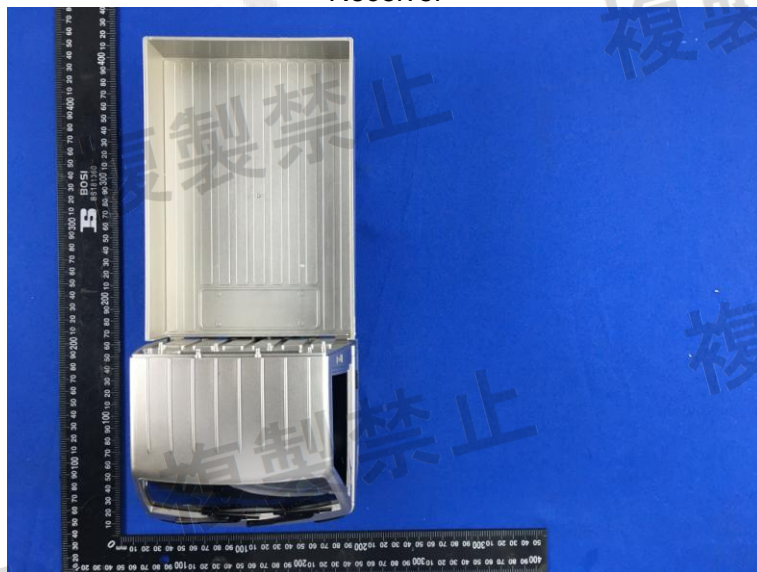




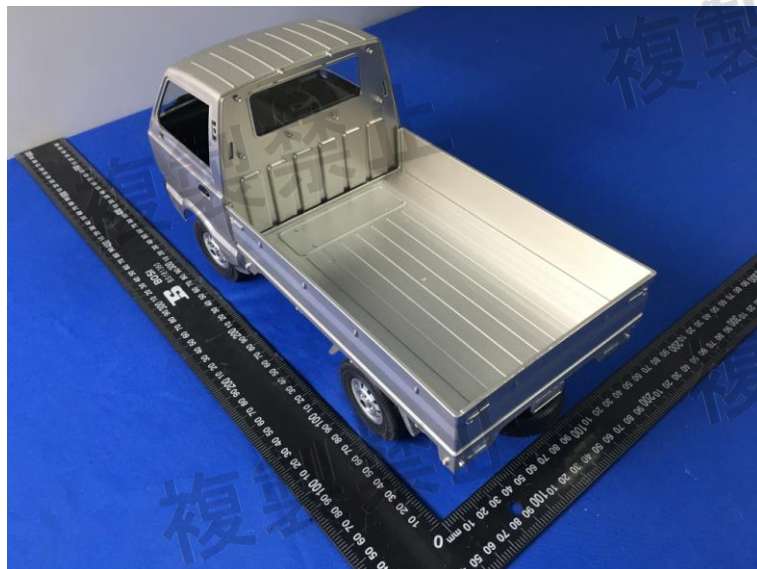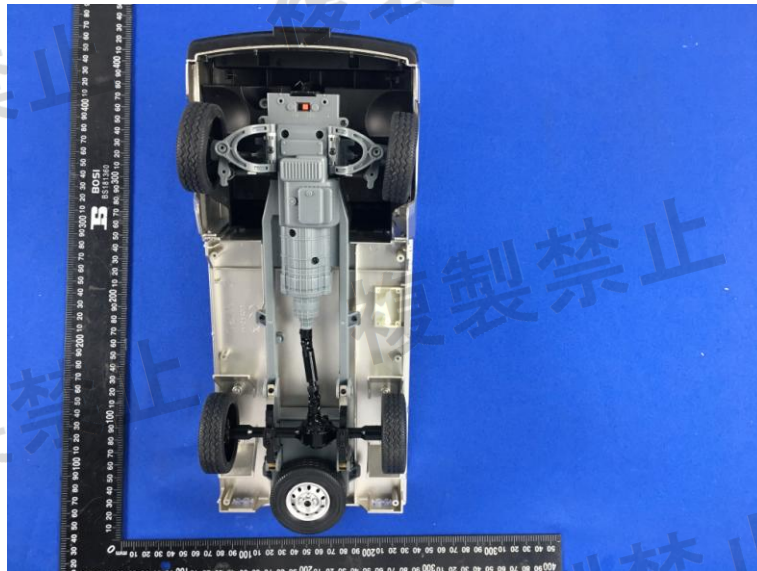


Internal Photos of EUT



Transmitter

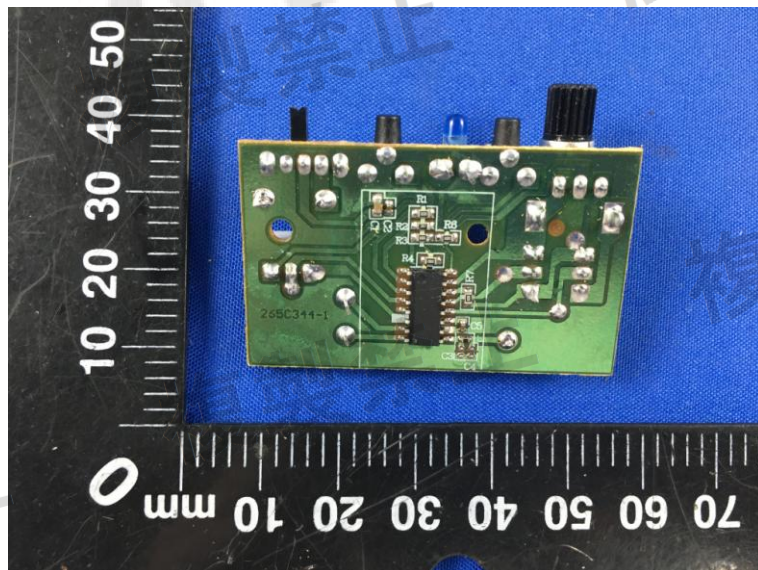
Transmitter  
Antenna



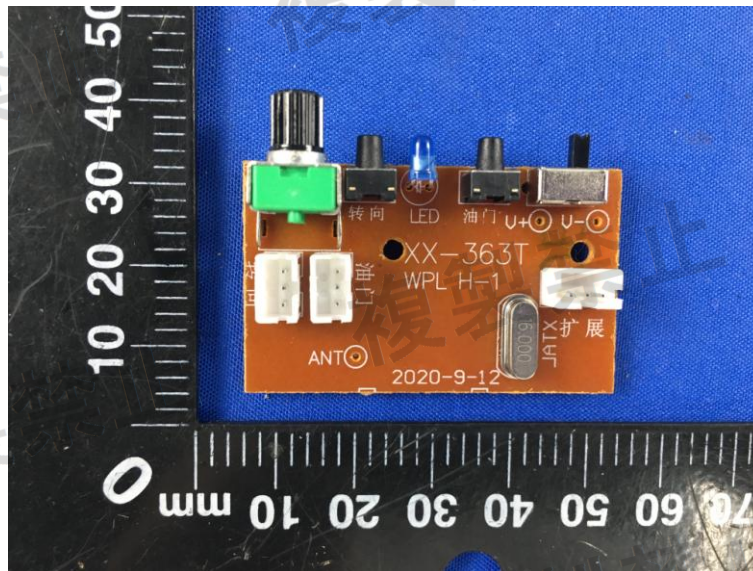

Receiver

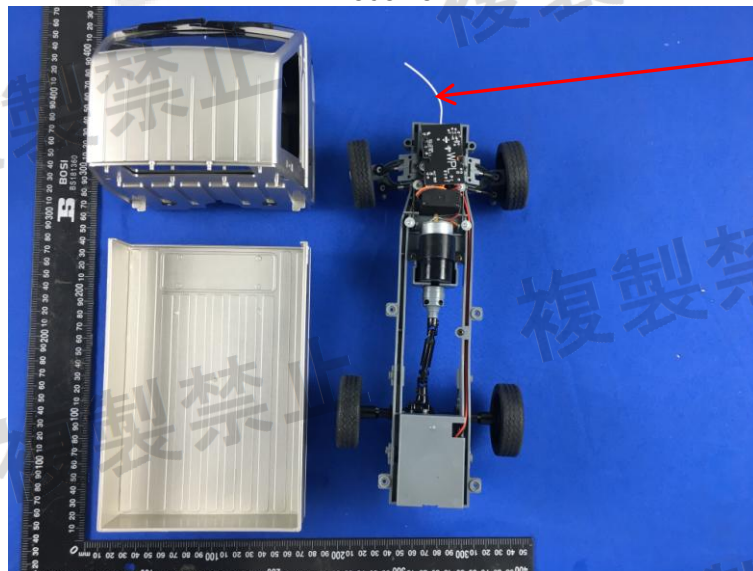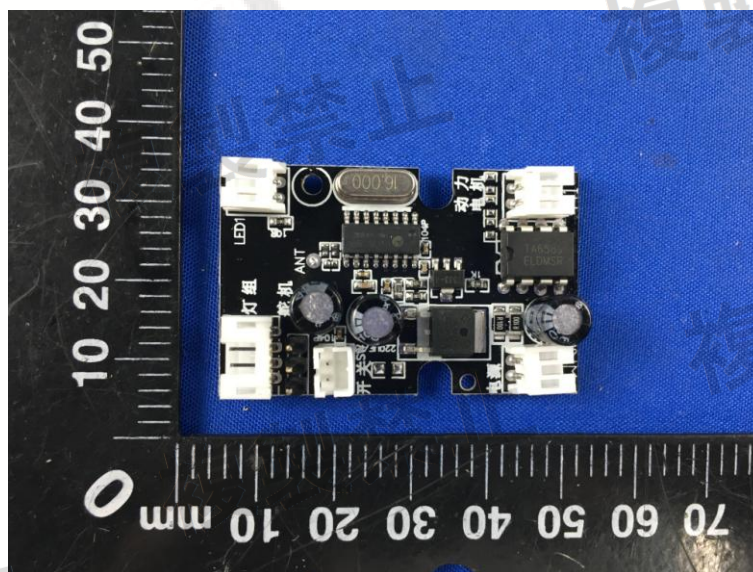Receiver  
Antenna

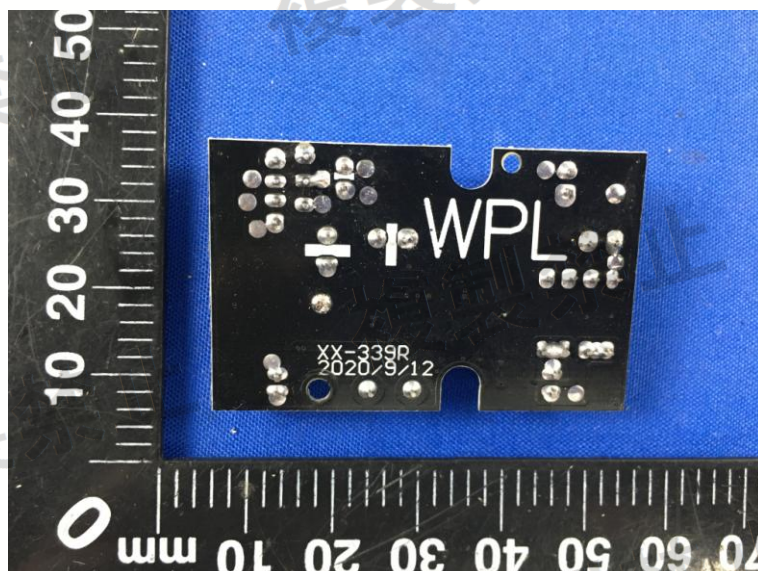

\*\*\*\*\*THE END\*\*\*\*\*