

JAPAN MIC
TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

Model: GL900A

This Report Concerns: <input checked="" type="checkbox"/> Original Report		Equipment Type: Cendence S	
Report Number:	RDG181113011-07B		
Report Date:	2018-11-26		
Reviewed By:	Robin Zheng RF Engineer <i>Robin Zheng</i>		
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
EUT TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EUT EXERCISE SOFTWARE	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
CONFIGURATION OF TEST SETUP	5
TEST EQUIPMENT LIST AND DETAILS.....	5
SUMMARY OF TEST RESULTS	6
FREQUENCY ERROR	7
LIMIT	7
TEST PROCEDURE	7
TEST DATA	7
OCCUPIED BANDWIDTH AND SPREADING BANDWIDTH	10
LIMIT	10
TEST PROCEDURE	10
TEST DATA	10
TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY.....	13
LIMIT	13
TEST PROCEDURE	13
TEST DATA	14
ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE.....	23
LIMIT	23
TEST PROCEDURE	23
TEST DATA	25
RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY	26
LIMIT	26
TEST PROCEDURE	26
MEASUREMENT RESULT	26
FREQUENCY HOPPING DWELL TIME.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
INTERFERENCE PREVENTION FUNCTION.....	37
REQUIREMENT	37
TEST PROCEDURE	37
MEASUREMENT RESULT	37
CONSTRUCTION PROTECTION CONFIRMATION	38
LIMIT	38
CONFIRMATION METHOD.....	38

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Equipment Name		Cendence S
Tested Model Number		GL900A
Radio Type		1.4M/10M/20M Mode
SDR Technical Parameters	Support Technical	1.4M/10M/20M Mode
	Modulation Type	GFSK, OFDM
	Emission Type	G1D, D1D
	Frequency Range	1.4M: 2403.5-2477.5MHz, 10M: 2406.5-2476.5MHz, 20M: 2411.5-2471.5MHz
	Output Power	1.4M: 0.5mW/MHz 10M: 0.15mW/MHz for 2411.5-2476.5MHz, 0.05mW/MHz for 2406.5-2410.5MHz 20M : 0.12mW/MHz
	Antenna Gain	3.69dBi
Nominal Power Supply:		DC 7.6V from battery
Voltage Range		6.8V to 8.4V DC
External Dimension		168mm (L) x 205mm (W) x 80mm (H)
Serial Number		181113011 (Assigned by BACL, Dongguan)
Received Date		2018-11-13

Adapter Information:

MODEL: IN2C180

INPUT: AC 100-240V~50/60Hz 2.5A

OUTPUT: 26.1V~-6.9A (Total)

Objective

The objective of the manufacturer is to demonstrate compliance with Radio Law of Japan item 19-2-2 of Article 2 Paragraph 1

Test Methodology

All measurements contained in this report were conducted with technical regulations of the Radio Law of Japan.

EUT TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode which provide by manufacturer. The system configure 1T2R, only main antenna can transmit.

For 1.4M mode, 38 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403.5	20	2441.5
2	2405.5
...
...
...	...	37	2475.5
19	2439.5	38	2477.5

3channels were tested: 2403.5MHz, 2441.5MHz and 2477.5MHz

The extreme voltage test conditions which were declared by the manufacturer and the normal conditions are as below:

NV: Normal Voltage 7.6V_{DC}

LV: Low Voltage 6.8V_{DC}

HV: High Voltage 8.4V_{DC}

EUT Exercise Software


For 1.4M mode, the software “DjiSdrConsole_1.3.1.50.exe” was used which was provided by manufacturer. The maximum power with maximum duty cycle was configured as default setting.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Pro instrument	DC Power Supply	pps3300	3300012

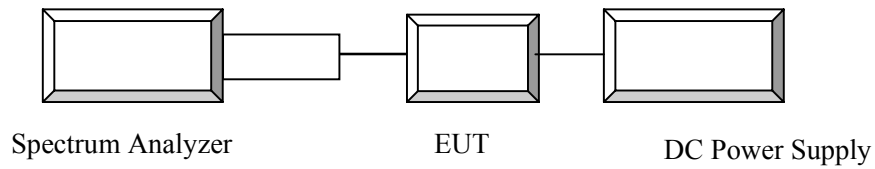Configuration of Test Setup**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2018-03-21	2019-03-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
narda	Attenuator	6dB	04270	2018-09-06	2019-09-06
E-Microwave	Blocking Control	EMDCB-00036	0E01201048	2018-05-06	2019-05-06
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
Pro instrument	DC Power Supply	pps3300	3300012	N/A	N/A

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

SUMMARY OF TEST RESULTS

MIC Notice No.88 Appendix No.43 Article 2, Paragraph 1, Item 19-2-2 Rules Section	Description of Test	Result
3	Frequency Error	Compliance
4	Occupied Bandwidth and Spreading Bandwidth	Compliance
5	Transmitter Spurious Emission and Unwanted Emission Intensity	Compliance
6	Antenna Output Power and Output Power Tolerance	Compliance
7	Receiver Spurious Emission and Unwanted Emission Intensity	Compliance
8	Transmission Antenna Gain	Not Applicable
9	Transmission Radiation Angle Width	Not Applicable
10	Frequency Hopping Dwell Time	Compliance
11	Interference Prevention Function	Compliance
Note 1	Construction Protection Confirmation	Compliance

Not Applicable: Please refer to 'Note 2' of Antenna Output Power and Output Power Tolerance section.

FREQUENCY ERROR

Limit

50ppm or below

Test Procedure

Set the EUT to the measurement frequency without modulation.
Setting of SA is following as: RB: 30 kHz / VB: 100 kHz / Sweep time: Auto / Sweep Mode: Continuous
sweep / Detect mode: Positive peak / Trace mode: Max hold.
Record the peak spot frequency.

If the EUT can't set at un-modulation mode, measure the 10dBc center frequency.

Test Data

Environmental Conditions

Temperature:	26.9°C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Elena Lei on 2018-11-19.

Test Result: Compliance

For 1.4M mode:

Frequency (MHz)	Voltage	Measure Frequency (MHz)		Result	Tolerance	Limit
		F1	F2	MHz	ppm	
2403.5	LV	2402.905	2404.074	2403.490	-4.37	<50ppm
	NV	2402.923	2404.087	2403.505	2.08	
	HV	2402.945	2404.135	2403.540	16.64	
2441.5	LV	2440.906	2442.070	2441.488	-4.92	
	NV	2440.913	2442.091	2441.502	0.82	
	HV	2440.936	2442.115	2441.526	10.44	
2477.5	LV	2476.879	2478.133	2477.506	2.42	
	NV	2476.918	2478.087	2477.503	1.01	
	HV	2476.912	2478.124	2477.518	7.27	


Note:

$$\text{Result} = (F1+F2)/2$$

$$\text{Tolerance} = (\text{Result} - \text{Test Frequency}) / \text{Test Frequency} * 10^6$$


Please refer to the plots for normal voltage test

Test Frequency: 2403.5MHz

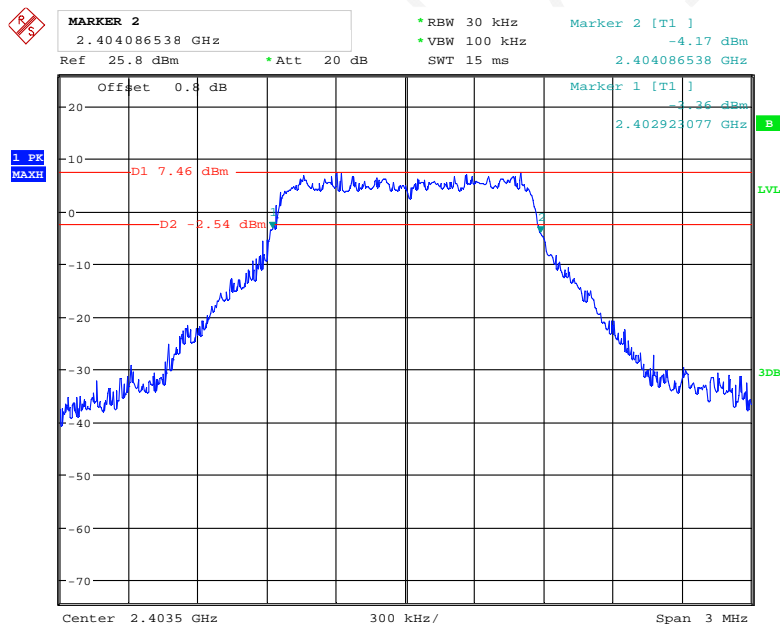


Date: 19.NOV.2018 16:47:37

Test Frequency:2441.5MHz

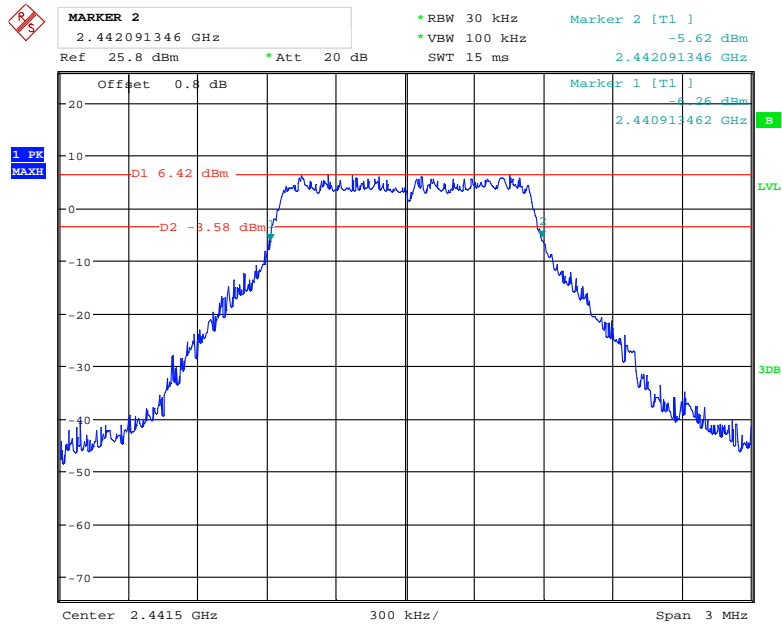

Date: 19.NOV.2018 16:44:32

Test Frequency:2477.5MHz

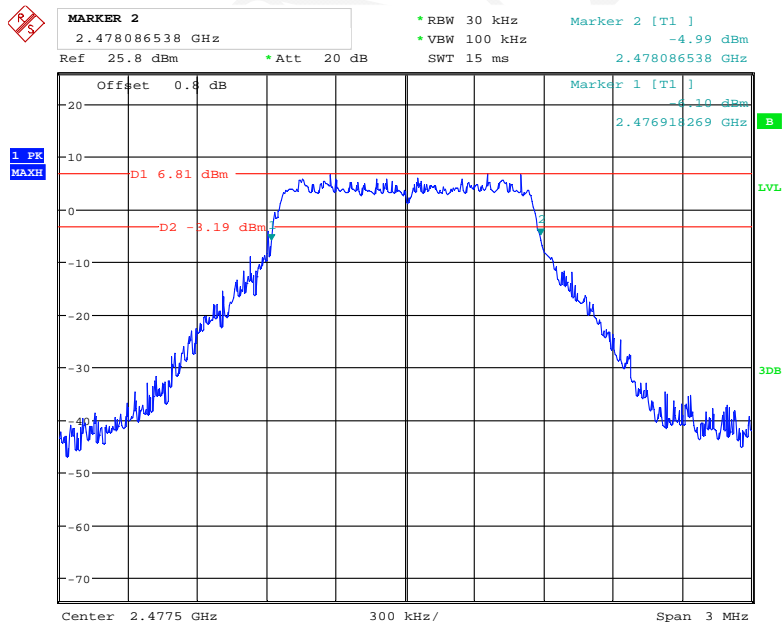

Date: 19.NOV.2018 16:49:17

OCCUPIED BANDWIDTH AND SPREADING BANDWIDTH

Limit

- Occupied bandwidth: FH \leq 83.5 MHz; DS \leq 26 MHz; OFDM \leq 38 MHz, Others \leq 26 MHz
- Spread Bandwidth: \geq 500 kHz(FH,DS), Spread factor $>$ 5.

Test Procedure

❖ Conditions of Application Equipment (EUT)

- The modulation state shall be “continuous frequency-hopping mode” by spread spectrum.

❖ Spectrum Analyzer Conditions

- Span: 200 MHz
- RBW: 300 kHz
- VBW: 300 kHz
- Sweep time: Auto, Marker: Marker Off
- Log scale : 10dB/Div, Data points : 501points (400 points or more)
- Detection: Positive Peak, Sweep mode: Continuous

Spread Factor= Spread Bandwidth/modulation rate. The modulation rate: MR=1.

Test Data

Environmental Conditions

Temperature:	26.9°C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Elena Lei on 2018-11-19.

Test Result: Compliance


Test Mode: Transmitting

For 1.4M mode:

Voltage	LV	NV	HV	Limit
Occupied Bandwidth(MHz)	75.04	75.00	74.97	$\leq 83.5\text{MHz}$
Spreading Bandwidth(MHz)	67.34	67.31	67.33	$\geq 500\text{kHz}$
Spreading Factor	67.34	67.31	67.33	>5


Please refer to the below plots for normal voltage test.

Spreading bandwidth

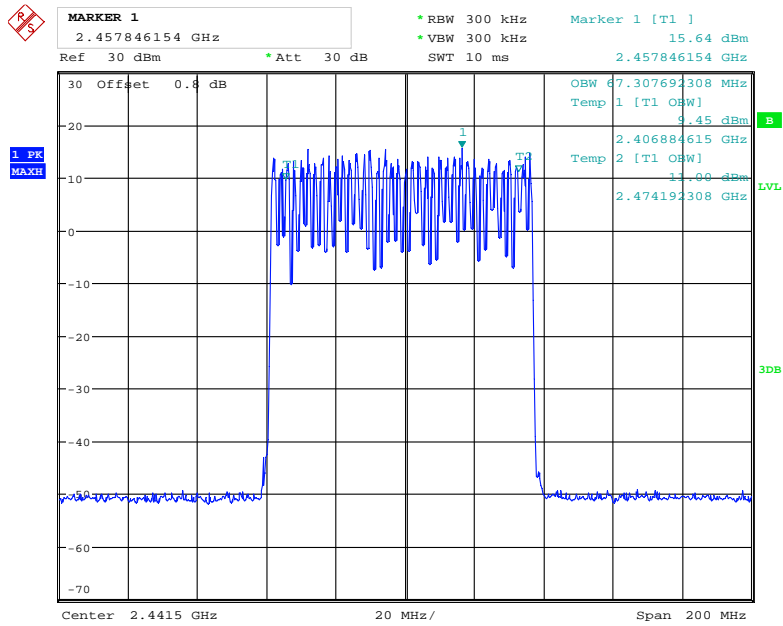

Date: 19.NOV.2018 16:35:27

Occupied bandwidth

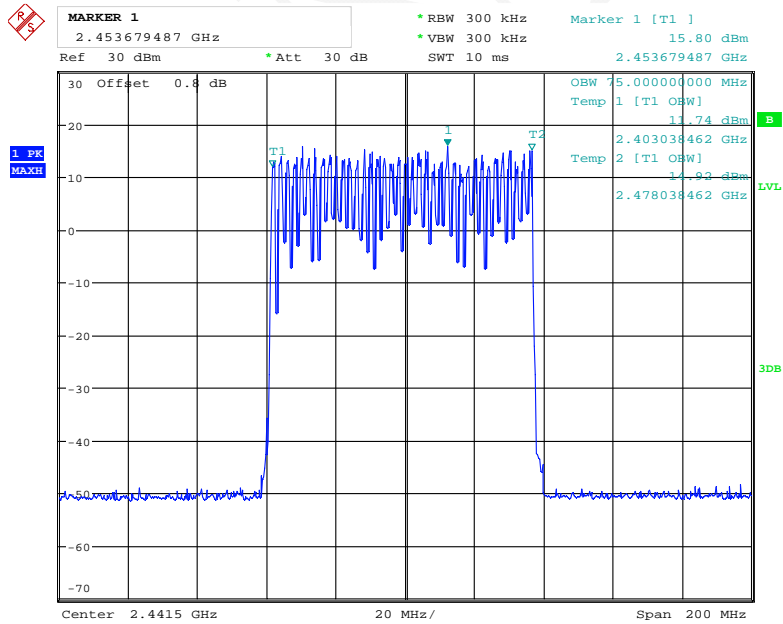

Date: 19.NOV.2018 16:34:34

TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY

Limit

- $f < 1000 \text{ MHz}$: $\leq 0.25 \mu\text{W}/100\text{kHz}$
- $f < 2387 \text{ MHz}$, $f > 2496.5 \text{ MHz}$: $\leq 2.5 \mu\text{W}/\text{MHz}$
- $2387 \text{ MHz} \leq f \leq 2400 \text{ MHz}$; $2483.5 \text{ MHz} < f \leq 2496.5 \text{ MHz}$: $\leq 25 \mu\text{W}/\text{MHz}$

Test Procedure

❖ Conditions of Application Equipment (EUT)

- The modulation state shall be in continuously transmitting mode.

❖ Spectrum Analyzer Conditions

- Setting of SA start 30MHz and stop frequency 1000MHz, RB:100kHz/VB:100kHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $0.25 \mu\text{W}/100\text{kHz}$.
- Setting of SA start 1000MHz and stop frequency 2387MHz, RBW: 1MHz/VBW: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. Reading value + cable loss shall be less than $2.5 \mu\text{W}/\text{MHz}$.
- Setting of SA start 2387MHz and stop frequency 2400MHz, RBW: 1MHz/VBW: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. Reading value + cable loss shall be less than $25 \mu\text{W}/\text{MHz}$.
- Setting of SA start 2483.5MHz and stop frequency 2496.5MHz, RBW: 1MHz/VBW: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. Reading value + cable loss shall be less than $25 \mu\text{W}/\text{MHz}$.
- Setting of SA start 2496.5MHz and stop frequency 12500MHz, RBW: 1MHz/VBW: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. Reading value + cable loss shall be less than $2.5 \mu\text{W}/\text{MHz}$.

Test Data**Environmental Conditions**

Temperature:	26.5~26.9°C
Relative Humidity:	44~47 %
ATM Pressure:	100.7~100.8 kPa

The testing was performed by Elena Lei on 2018-11-19~2018-11-20.


Test Result: Compliance

Test Mode: 1.4M Mode


	Frequency Band	2403.5 MHz			2441.5 MHz			2477.5 MHz			Limit
		LV	NV	HV	LV	NV	HV	LV	NV	HV	
Raw data	Band I (dBm/100kHz)	-57.17	-57.47	-57.38	-57.69	-57.52	-57.78	-52.51	-52.80	-52.92	-36dBm/100kHz
	Band II (dBm/MHz)	-48.13	-48.32	-48.05	-49.24	-49.33	-49.41	-50.25	-50.03	-49.85	-26dBm/MHz
	Band III (dBm/MHz)	-26.68	-26.55	-26.39	-47.59	-47.67	-47.45	-48.57	-48.68	-48.78	-16dBm/MHz
	Band IV (dBm/MHz)	-57.33	-57.65	-57.12	-57.26	-57.02	-57.33	-46.51	-46.49	-46.50	-16dBm/MHz
	Band V (dBm/MHz)	-42.36	-42.50	-42.47	-44.87	-44.76	-44.54	-47.79	-47.86	-47.65	-26dBm/MHz
Unwanted Emission Intensity	Band I (μW/100kHz)	0.0019	0.0018	0.0018	0.0017	0.0018	0.0017	0.0056	0.0052	0.0051	0.25 μW/100kHz
	Band II (μW/MHz)	0.0154	0.0147	0.0157	0.0119	0.0117	0.0115	0.0094	0.0099	0.0104	2.5 μW/MHz
	Band III (μW/MHz)	2.1478	2.2131	2.2961	0.0174	0.0171	0.0180	0.0139	0.0136	0.0132	25 μW/MHz
	Band IV (μW/MHz)	0.0018	0.0017	0.0019	0.0019	0.0020	0.0018	0.0223	0.0224	0.0224	25 μW/MHz
	Band V (μW/MHz)	0.0581	0.0562	0.0566	0.0326	0.0334	0.0352	0.0166	0.0164	0.0172	2.5 μW/MHz

Note: Band I: 30MHz~1000MHz
 Band II: 1000MHz~2387MHz
 Band III: 2387MHz~2400MHz
 Band IV: 2483.5MHz~2496.5MHz
 Band V: 2496.5MHz~12500MHz


Please refer to the below plots for normal voltage test.
Test Frequency: 2403.5 MHz

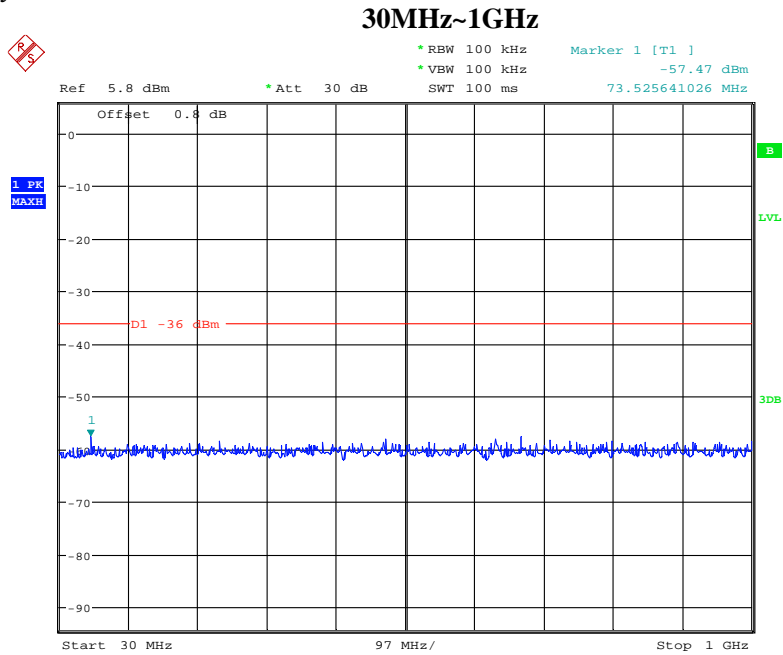


Date: 19.NOV.2018 16:55:54

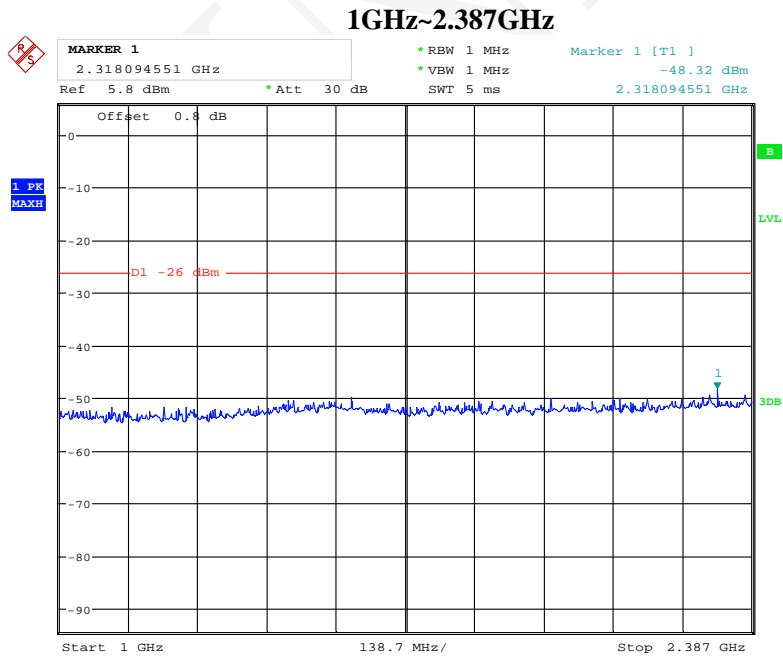


Date: 19.NOV.2018 17:00:58

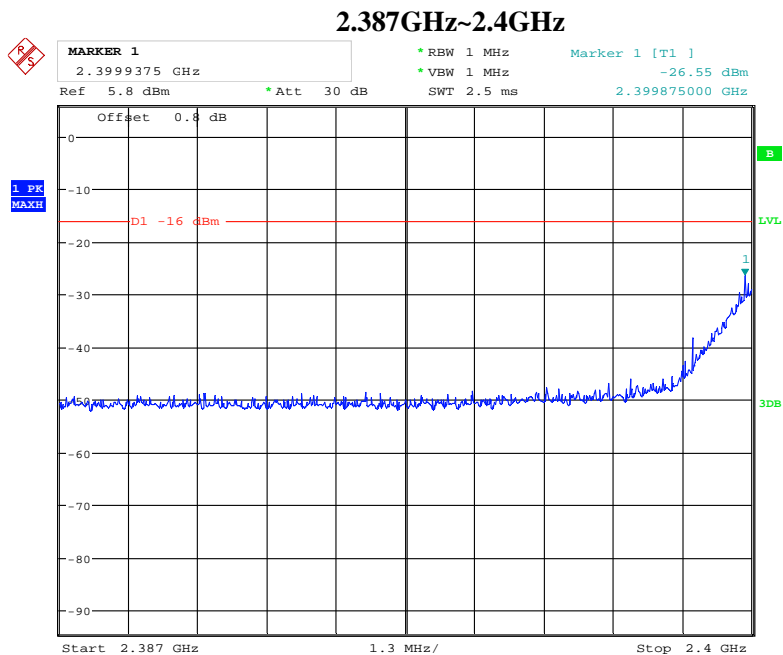

Date: 19.NOV.2018 17:00:41

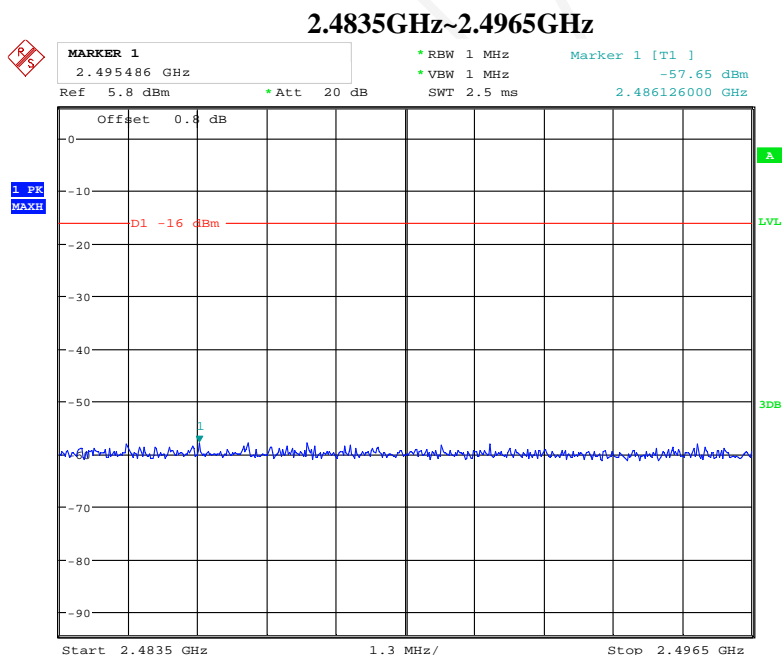


Date: 20.NOV.2018 15:25:13

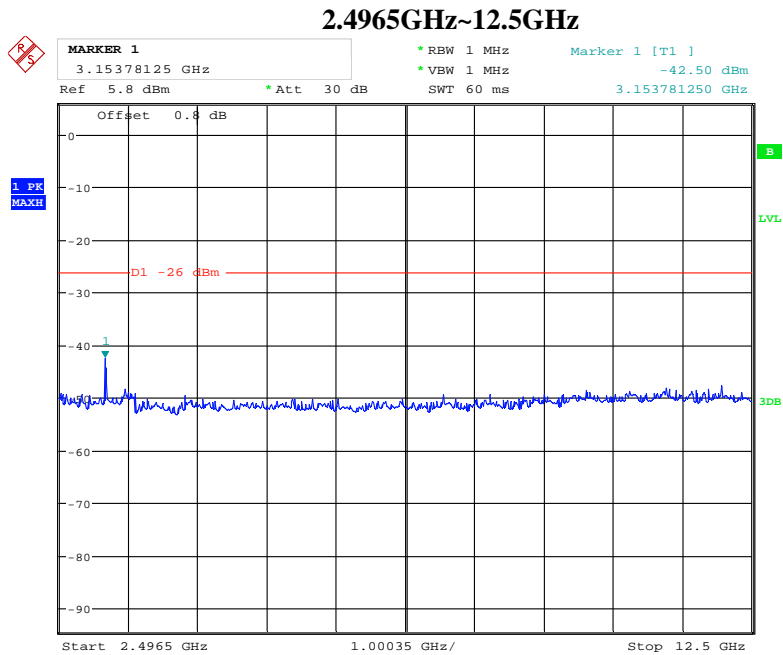


Date: 19.NOV.2018 17:01:21

Test Frequency:2441.5MHz

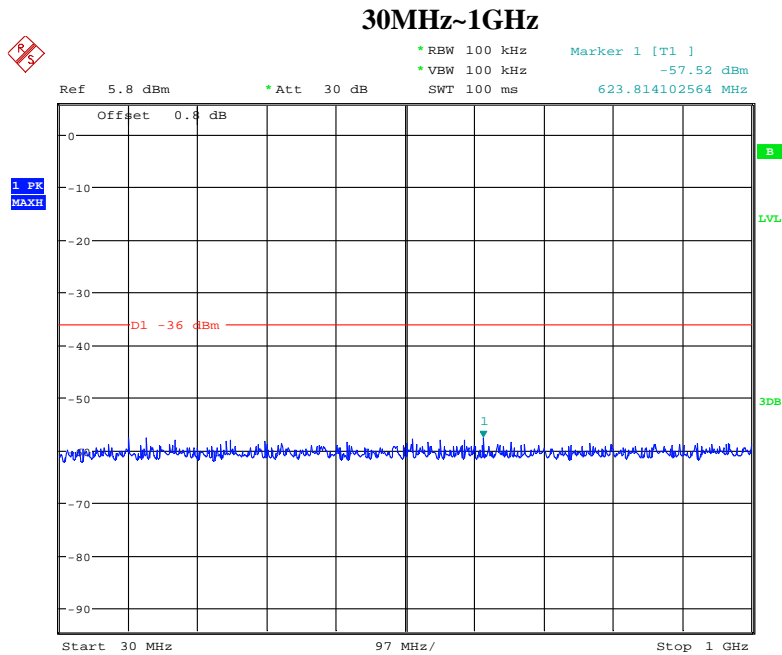


Date: 19.NOV.2018 16:56:07

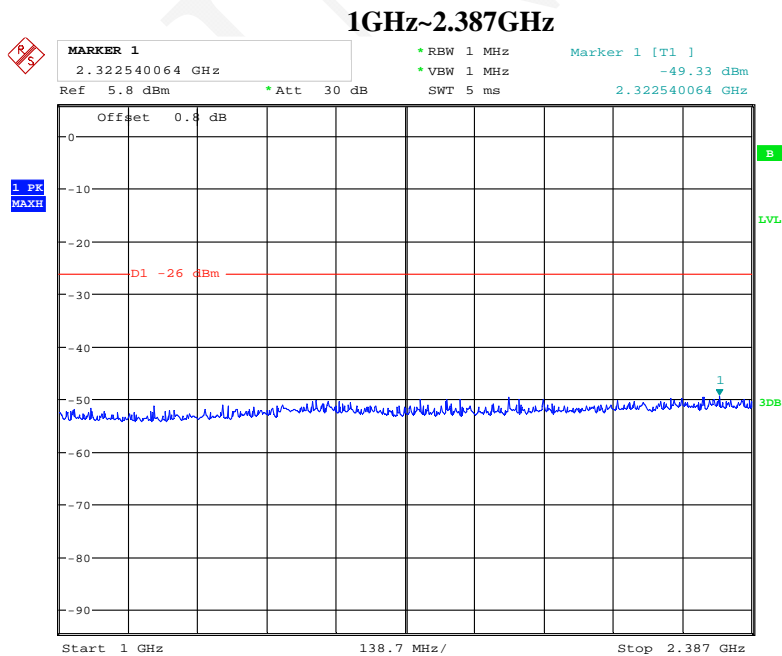


Date: 19.NOV.2018 16:58:08

2.387GHz~2.4GHz

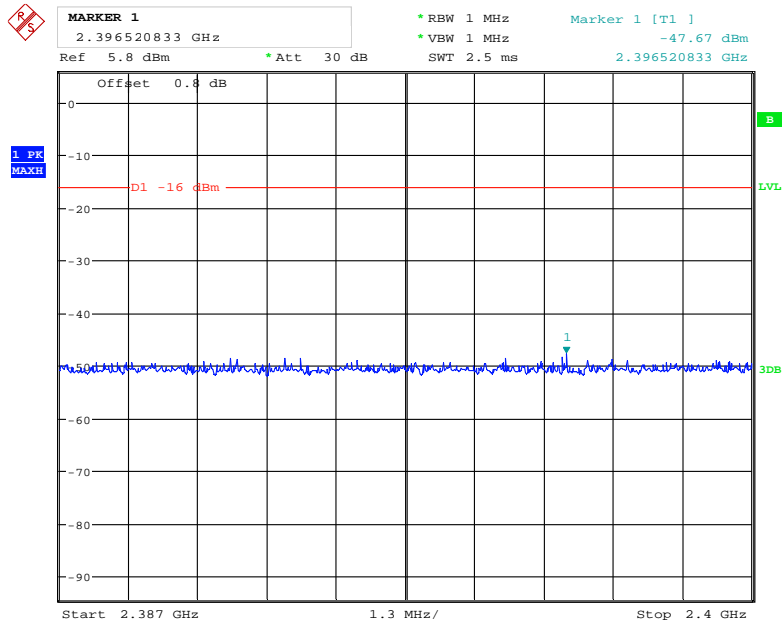


Date: 19.NOV.2018 16:57:40

2.4835GHz~2.4965GHz

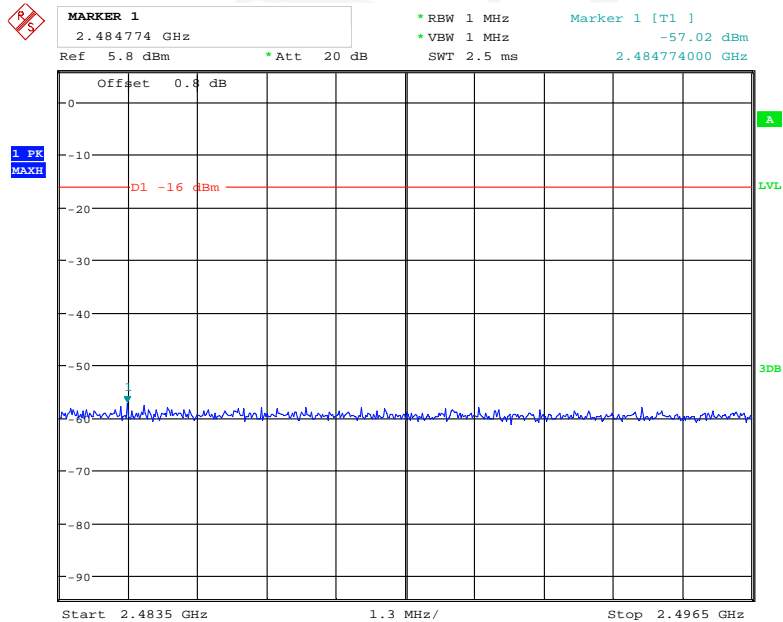


Date: 20.NOV.2018 15:25:00

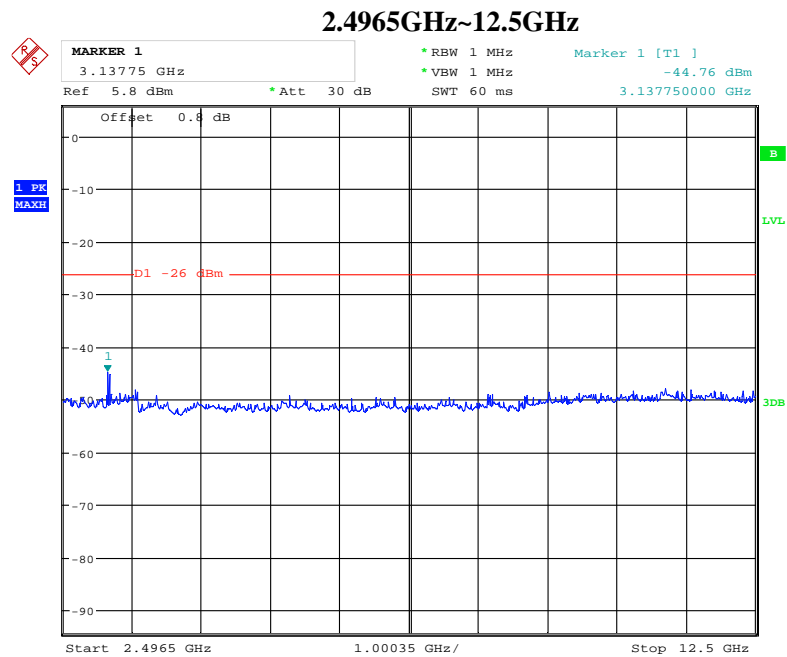


Date: 19.NOV.2018 16:58:28


Test Frequency:2477.5MHz

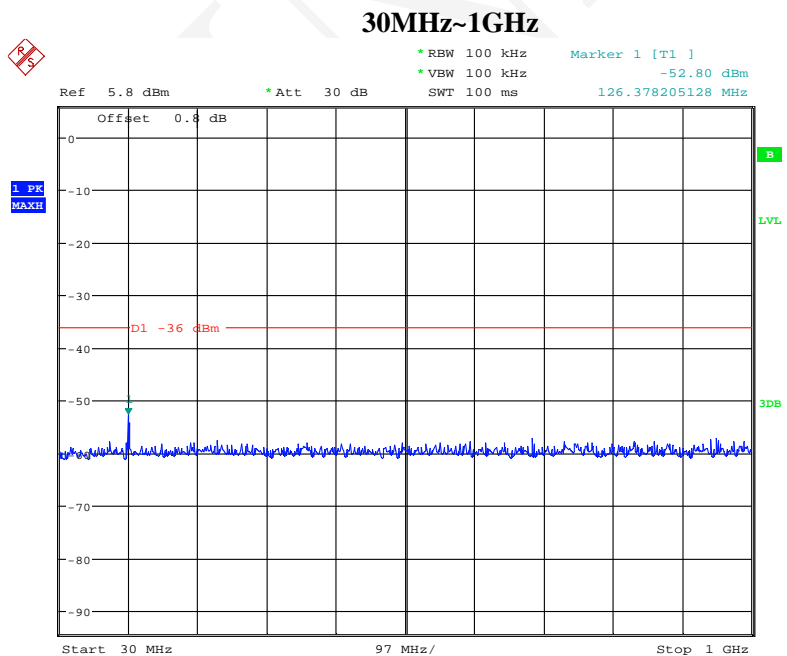


Date: 19.NOV.2018 16:56:17

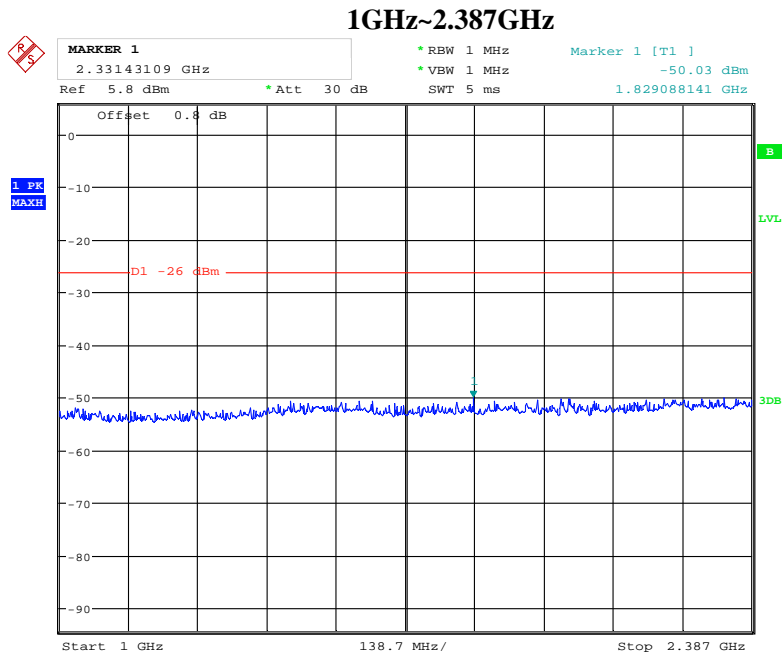


Date: 19.NOV.2018 17:01:57

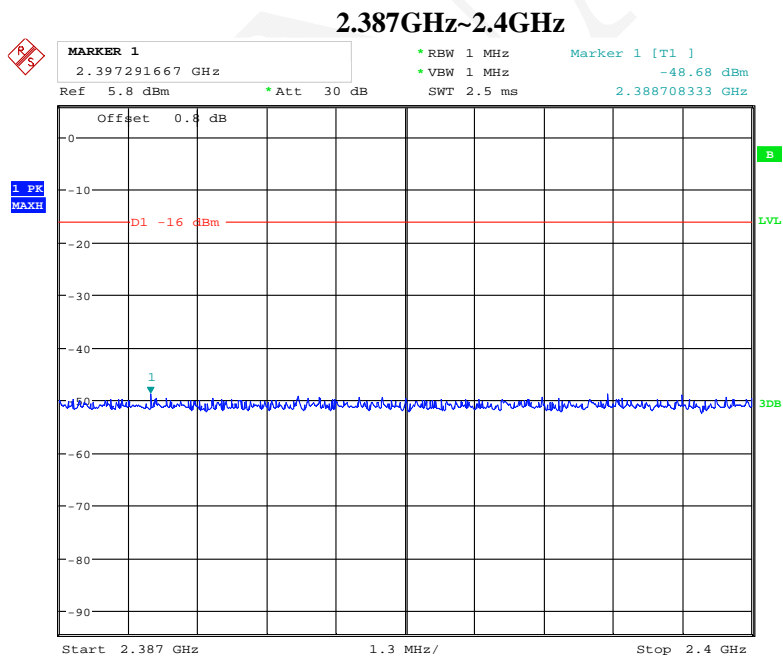

Date: 19.NOV.2018 17:02:14

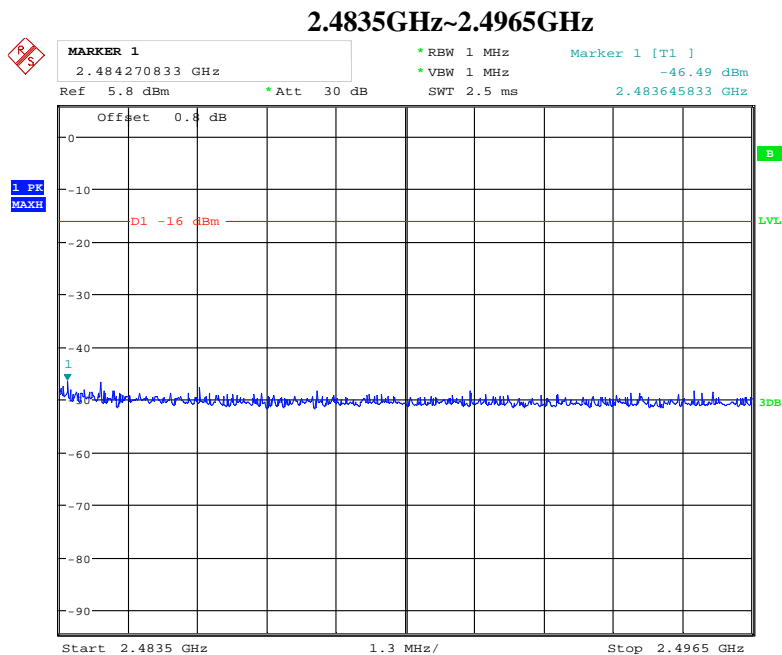

Date: 19.NOV.2018 17:02:29

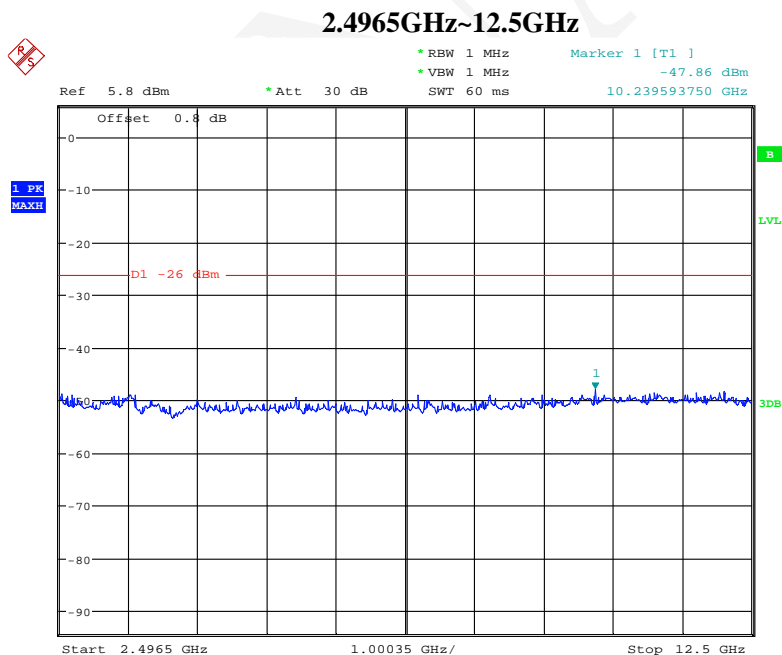

Date: 19.NOV.2018 17:01:44

ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE

Limit

- $\leq 3 \text{ mW /MHz}$ (FHSS from 2402-2480 MHz which contains 2427-2470.75MHz)
- $\leq 10 \text{ mW/MHz}$ (OFDM, DSSS from 2400-2483.5 MHz)
- $\leq 10 \text{ mW}$ (other from 2400-2483.5 MHz)

The Output Power Tolerance must be within +20%, -80%.

- $\text{EIRP} \leq 6.91 \text{ dBm/MHz}$ (FHSS from 2402-2480 MHz)

Test Procedure

For FHSS UUT:

Connect the UUT to the power meter in a state of hopping mode.

For OFDM, DSSS UUT:

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test.
- RBW: 1 MHz.
- VBW: 1 MHz.
- Span: Wide enough to cover the complete power envelope of the signal of the UUT.
- Detector: Peak.
- Trace Mode: Max Hold.

Step 2:

When the trace is complete, find the peak value of the power envelope and record the frequency.

Step 3:

Make the following changes to the settings of the spectrum analyser:

- Centre Frequency: Equal to the frequency recorded in step 2.
- Span: 3 MHz.
- RBW: 1 MHz.
- VBW: 1 MHz.
- Detector: Average (see note).
- Trace Mode: Max Hold.

For other UUT:

Make the following changes to the settings of the spectrum analyser:

- Centre Frequency: The centre frequency of the channel under test.
- Span: 5MHz.
- RBW: 3 MHz.
- VBW: 10 MHz.
- Detector: Peak
- Trace Mode: Max Hold.

NOTE: The detector mode "Average" is often referred to as "RMS Average" or "Sample" but do not use Video Average.


When the trace is complete, capture the trace, for example using the "View" option on the spectrum analyser. For Find the peak value of the trace and place the analyser marker on this peak. This level is recorded as D.

D shall be recorded in the test report.

The maximum PD, which is e.i.r.p. PSD (spectral density power) or power, is calculated from the above measured value D, and the applicable antenna assembly gain "G" in dBi, according to the formula below. If more than one antenna assembly is intended for this power setting, the gain of the antenna assembly with the highest gain shall be used.

$$PD = D + G$$

Test Setup Block diagram

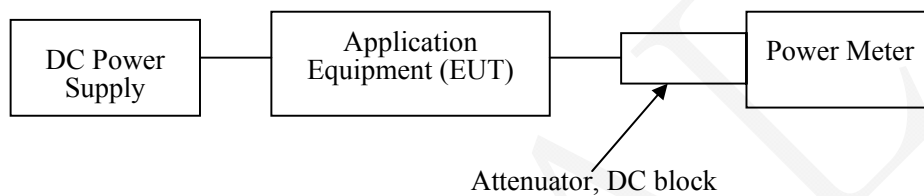

Test Data**Environmental Conditions**

Temperature:	26.9°C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Elena Lei on 2018-11-19.

Test Result: Compliance

1.4M mode:

Mode	Hopping			Limit
Voltage	LV	NV	HV	
Reading (dBm)	4.28	4.46	4.35	
Reading (mW)	2.68	2.79	2.72	
Spread Bandwidth (MHz)	67.34	67.31	67.33	
Duty Cycle (%)	11.47	11.47	11.47	
Antenna Output Power (mW/MHz)	0.3470	0.3614	0.3522	3mW/MHz
Antenna Output Power Tolerance (%)	-30.60	-27.72	-29.56	+20% ~ -80%
EIRP (dBm/MHz)	-0.91	-0.73	-0.84	6.91dBm /MHz

Note:

- 1) Antenna Output power (mW/MHz) = Reading (mW)/Duty cycle (%)/Spread Bandwidth (MHz)
- 2) Antenna Output Power Tolerance = (Antenna Output power -Declared Power)/ Declared Power*100%
- 3) Declared Power: 0.5mW/MHz for 1.4M.

Note 2: Transmission Antenna Gain and Transmission Radiation Angle Width are not required since EIRP less than 6.91dBm/MHz.

RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY

Limit

- $\leq 4 \text{ nW}$ ($30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$)
- $\leq 20 \text{ nW}$ ($1 \text{ GHz} \leq f \leq 12.5 \text{ GHz}$)

Test Procedure

❖ Conditions of Application Equipment (EUT)

- The modulation state shall be “continuous receiving mode”.

❖ Spectrum Analyzer Conditions

- Start Frequency: Start Frequency of frequency range to measure (30MHz or 1GHz)
- Stop Frequency: Stop Frequency of frequency range to measure (1GHz or 12.5GHz)
- Span: AUTO (Measurement Range)
- RBW: 100 kHz, VBW: 100 kHz for Frequency < 1 GHz
- RBW: 1MHz, VBW: 1MHz for Frequency > 1 GHz
- Sweep time: AUTO or more
- Sweep mode: Auto Sweep
- Detection: Positive Peak
- Reference Level: Enough level for maximum dynamic range

Measurement Result

Environmental Conditions

Temperature:	26.5~26.9°C
Relative Humidity:	47~49 %
ATM Pressure:	100.7~100.8 kPa

The testing was performed by Elena Lei on 2018-11-19 and 2018-11-21.

Test Result: Compliance, please see the below tables and plots

Test Mode: Receiving

1.4M mode:

	Frequency band	2403.5 MHz			2441.5 MHz			2477.5 MHz			Limit
		LV	NV	HV	LV	NV	HV	LV	NV	HV	
Raw data Chain 0	Band VI dBm	-70.37	-70.13	-69.86	-69.72	-70.02	-70.19	-69.89	-70.07	-69.86	-54dBm
	Band VII dBm	-48.43	-48.60	-48.82	-53.67	-53.38	-53.48	-61.89	-61.78	-61.63	-47dBm
Raw data Chain 1	Band VI dBm	-70.31	-69.73	-69.88	-69.73	-70.44	-70.11	-69.57	-69.85	-69.11	-54dBm
	Band VII dBm	-70.62	-70.81	-70.22	-69.66	-69.93	-69.48	-70.77	-70.20	-70.97	-47dBm
Unwanted Emission Intensity Chain 0	Band VI nW	0.09183	0.09705	0.10328	0.10666	0.09954	0.09572	0.10257	0.09840	0.10328	-54dBm
	Band VII nW	14.35489	13.80384	13.12200	4.29536	4.59198	4.48745	0.64714	0.66374	0.68707	-47dBm
Unwanted Emission Intensity Chain 1	Band VI nW	0.09311	0.10641	0.10280	0.10641	0.09036	0.09750	0.11041	0.10351	0.12274	4nW
	Band VII nW	0.08670	0.08299	0.09506	0.10814	0.10162	0.11272	0.08375	0.09550	0.07998	20nW
Unwanted Emission Intensity Chain 0+1	Band VI nW	0.18494	0.20346	0.20608	0.21307	0.1899	0.19322	0.21298	0.20191	0.22602	4nW
	Band VII nW	14.44159	13.88683	13.21706	4.4035	4.6936	4.60017	0.73089	0.75924	0.76705	20nW

Note:


Band VI: 30MHz~1000MHz

Band VII: 1000MHz~12500MHz

Please refer to the below plots for normal voltage test.


Chain 0
Test Frequency: 2403.5MHz

30MHz~1000MHz

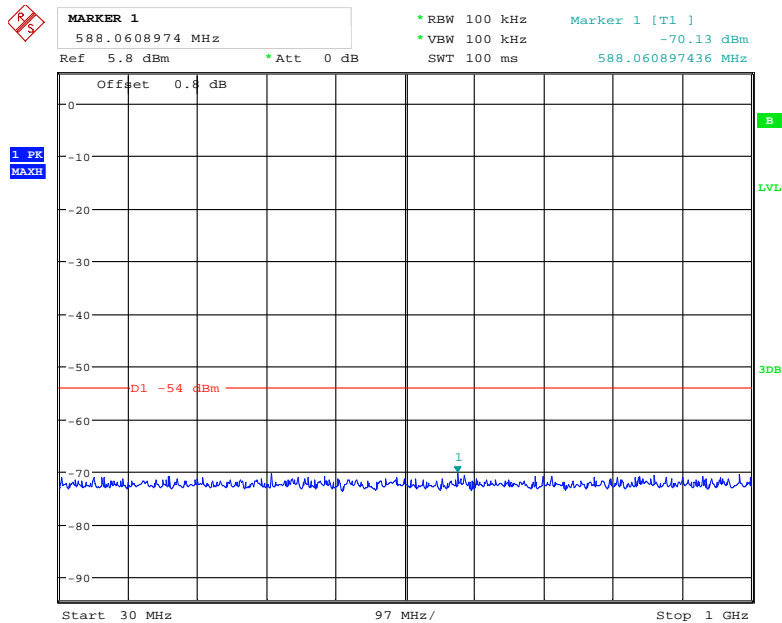


Date: 19.NOV.2018 17:05:40

1000MHz~12500MHz

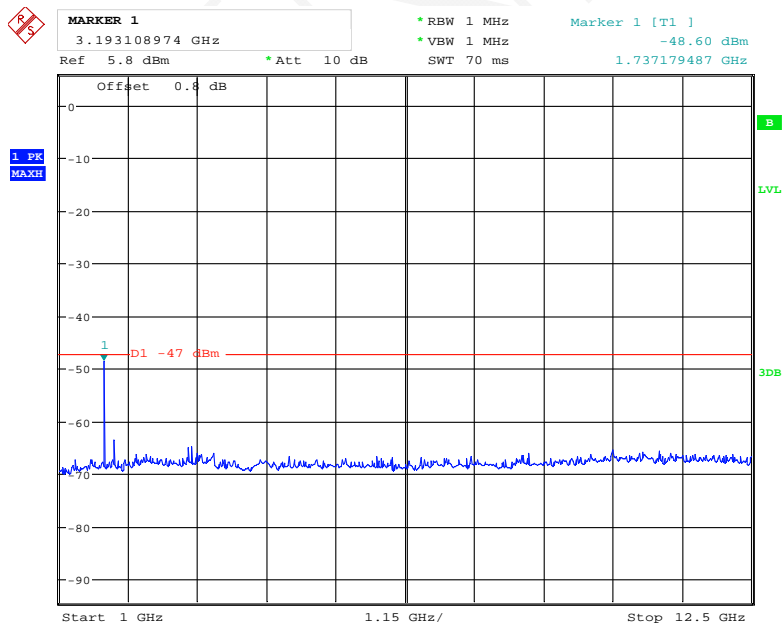


Date: 19.NOV.2018 17:09:42

Test Frequency: 2441.5MHz:


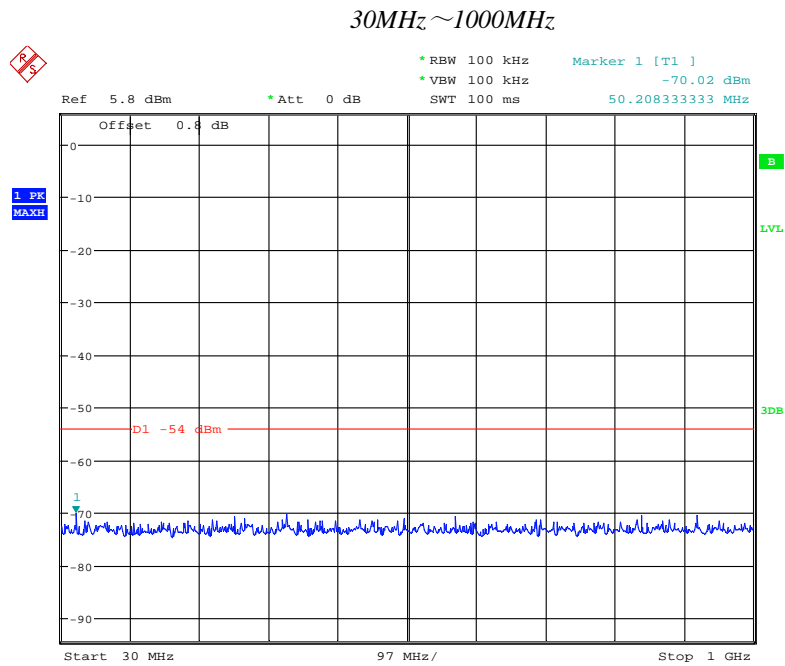


Date: 19.NOV.2018 17:05:48

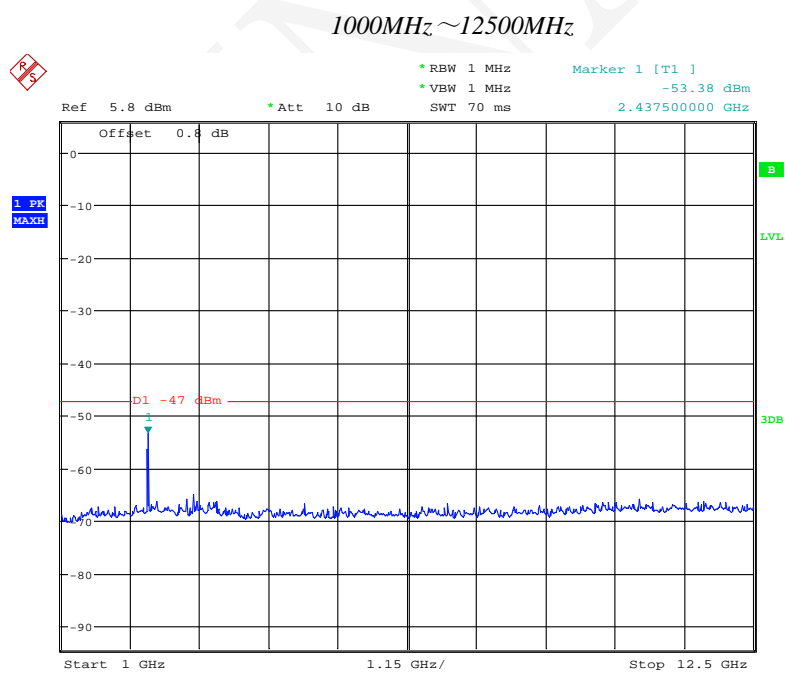


Date: 19.NOV.2018 17:10:02

Test Frequency: 2477.5MHz:

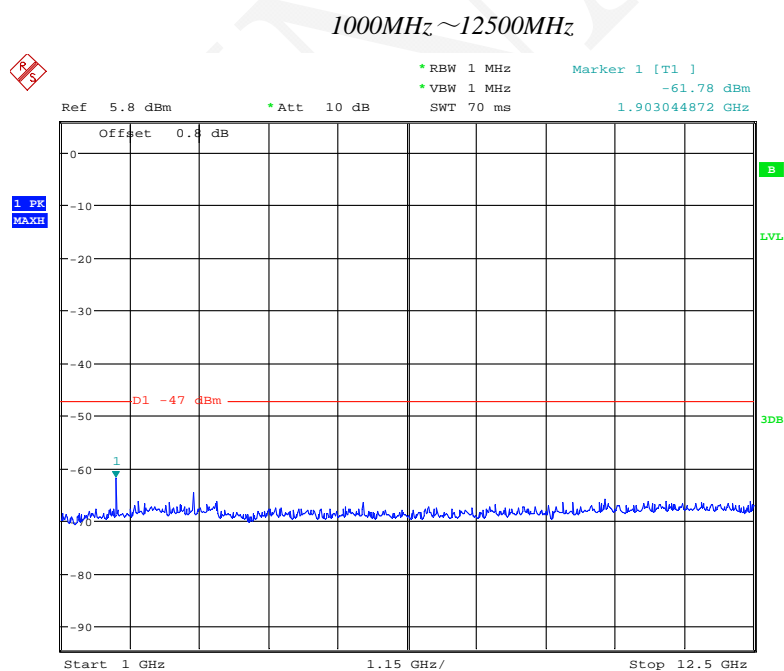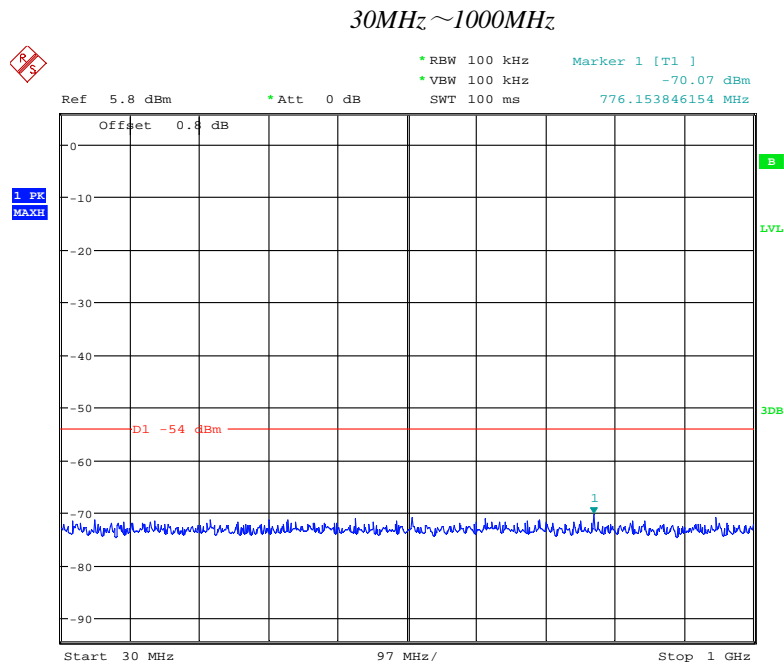


Chain 1
1.4M mode, Test Frequency: 2403.5MHz

30MHz~1000MHz

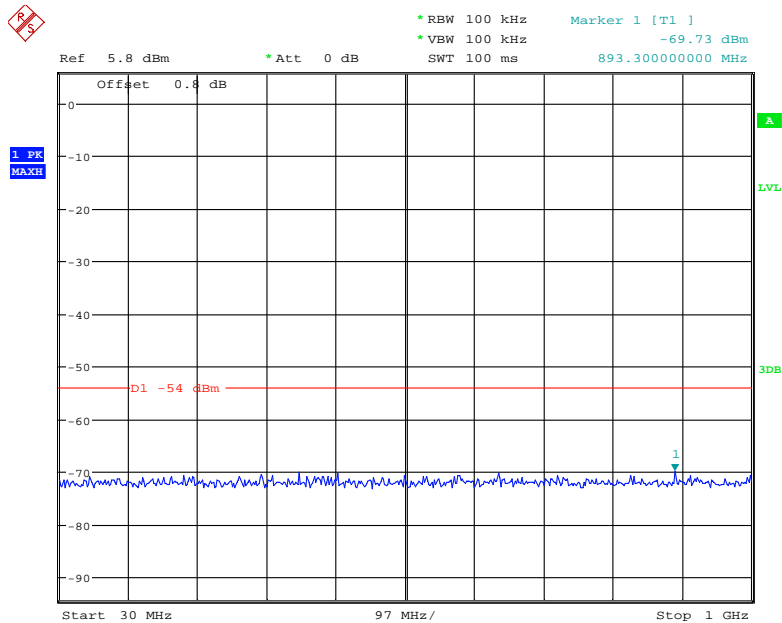


Date: 21.NOV.2018 10:43:05

1000MHz~12500MHz

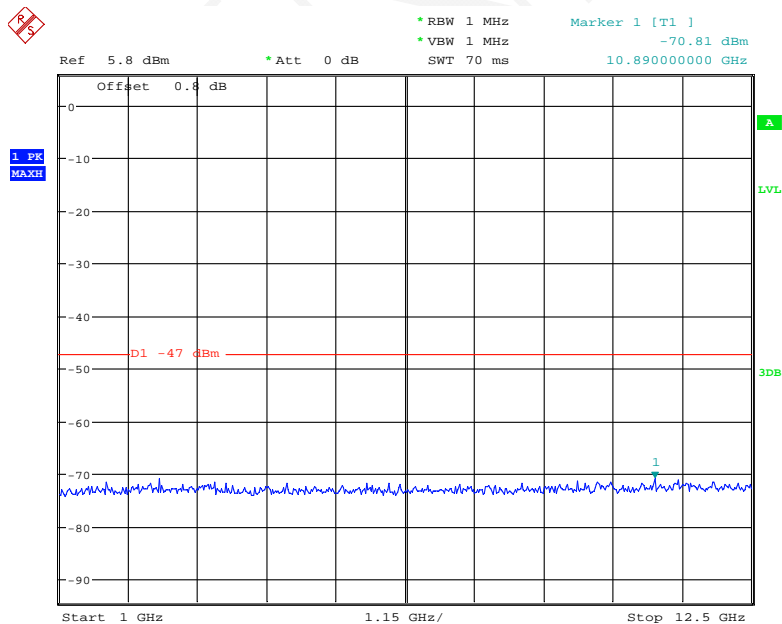


Date: 21.NOV.2018 10:49:55

Test Frequency: 2441.5MHz:

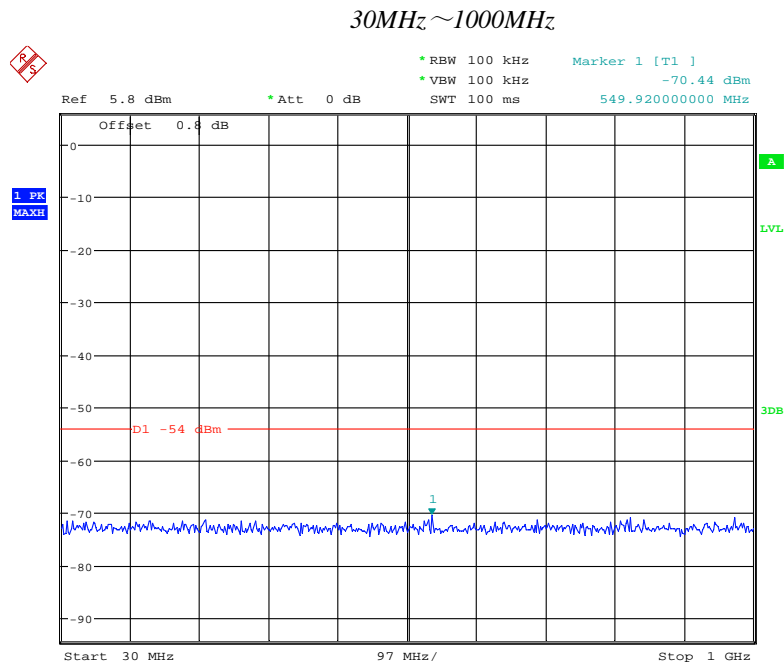


Date: 21.NOV.2018 10:43:22

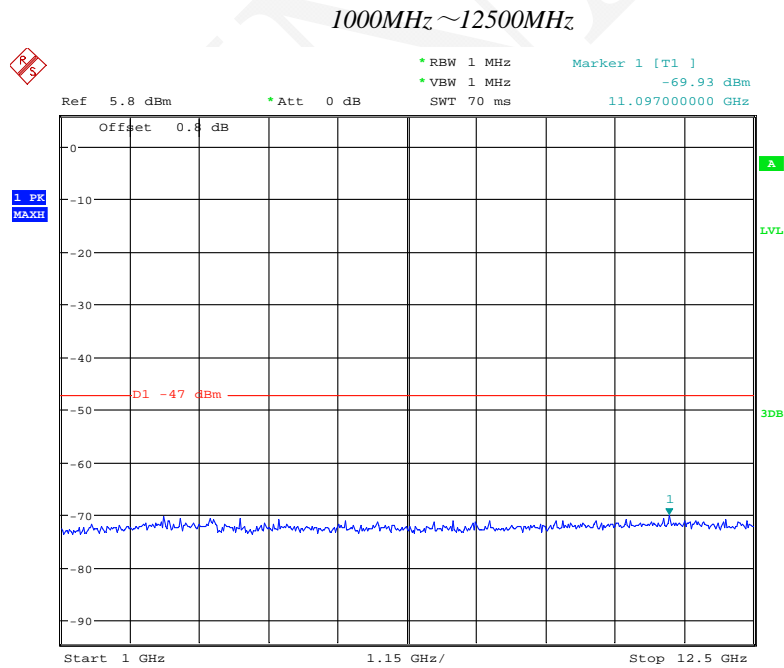


Date: 21.NOV.2018 10:49:39

Test Frequency: 2477.5MHz:

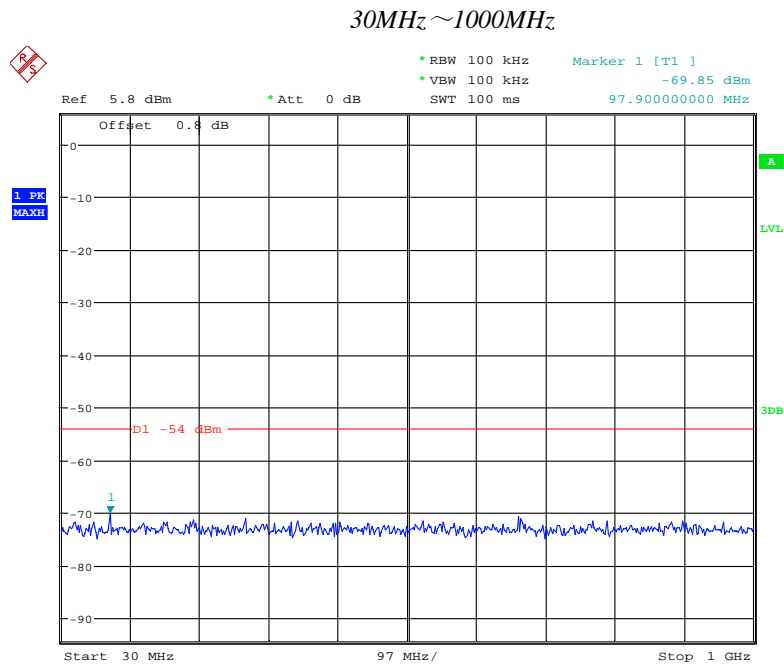

Date: 21.NOV.2018 10:43:37

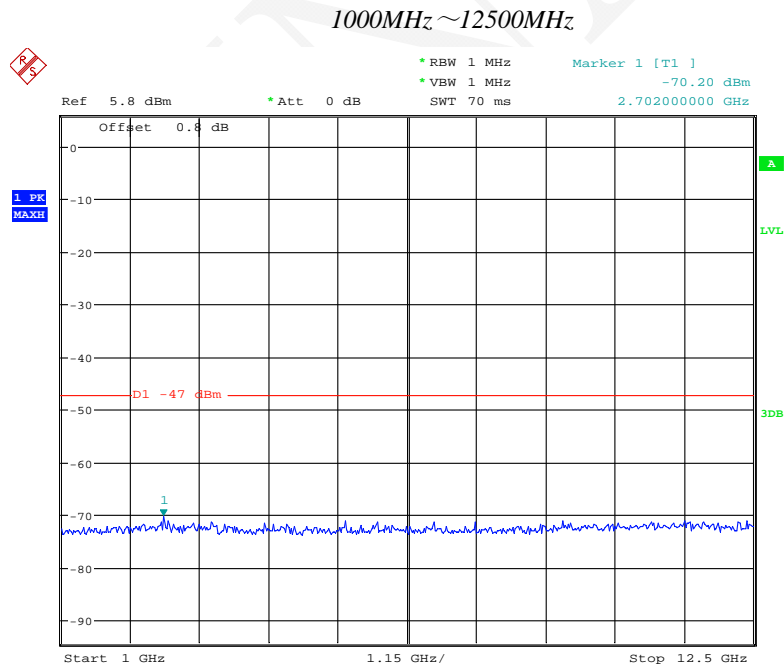

Date: 21.NOV.2018 10:49:24

FREQUENCY HOPPING DWELL TIME

Applicable Standard

According to Radio Law Radio Equipment Regulations Article 49-20, frequency dwell time is 0.4 seconds or below.

Test Procedure

❖ Conditions of Application Equipment (EUT)

- Set the application equipment (EUT) to the measurement frequency.
- The modulation state shall be “continuous (burst) transmission mode”. If impossible, it shall be “continuous frequency-hopping mode”.

❖ Spectrum Analyzer Conditions

For spreading bandwidth:

- Span: 200MHz
- RBW: 300kHz, VBW: 300kHz
- Log scale: 10dB/Div, Data points: 501points (400 points or more)
- Detection: Positive Peak, Sweep mode: Continuous

For duty cycle and hopping number:

- Center Frequency: 2441.0 MHz
- RBW/VBW: ≥ 1 MHz
- Log scale: 10dB/Div, Data points: 501points (400 points or more)
- Detection: Sample, Sweep mode: Continuous

Test Data

Environmental Conditions

Temperature:	26.9°C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa


The testing was performed by Elena Lei on 2018-11-19.

Test Result: Compliance

1.4M mode:


Spreading bandwidth (MHz)	duty cycle			Observed Period (s)	Hops in Observed Period	Dwell Time (s)	Limit (s)	Result
	T _{on} (ms)	T _{on} +T _{off} (ms)	T _{on} /(T _{on} +T _{off}) (%)					
67.31	1.154	10.064	11.47%	26.92	143	0.17	0.4	Pass

Note: Dwell time = Time per one hopping (On time) * hopping number (within the time obtained by multiplying the spread rate by 0.4s)

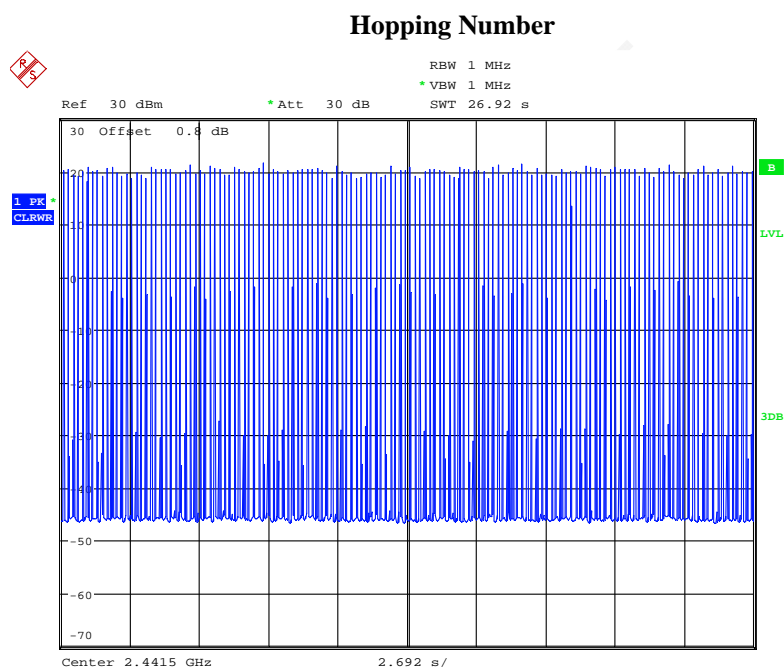


Date: 19.NOV.2018 16:42:30

Duty Cycle-1

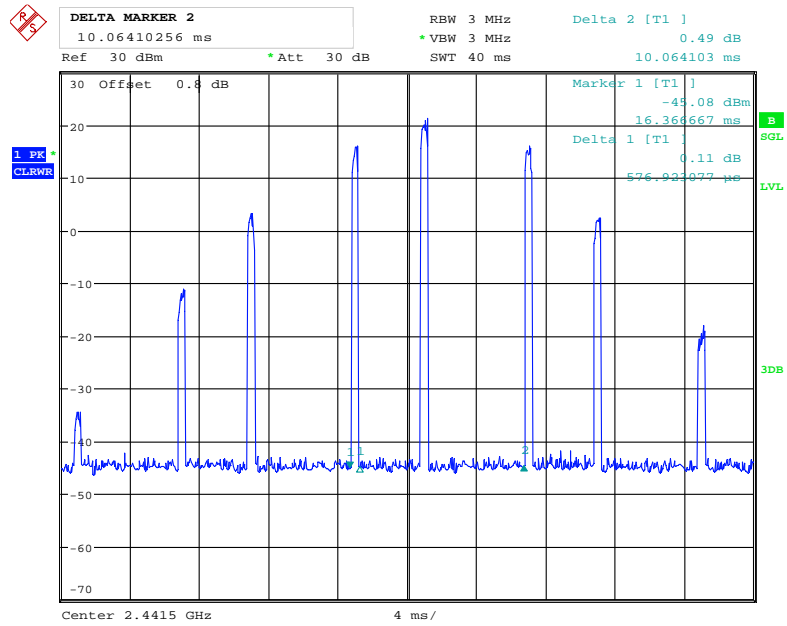

Date: 19.NOV.2018 16:37:12

Duty Cycle-2

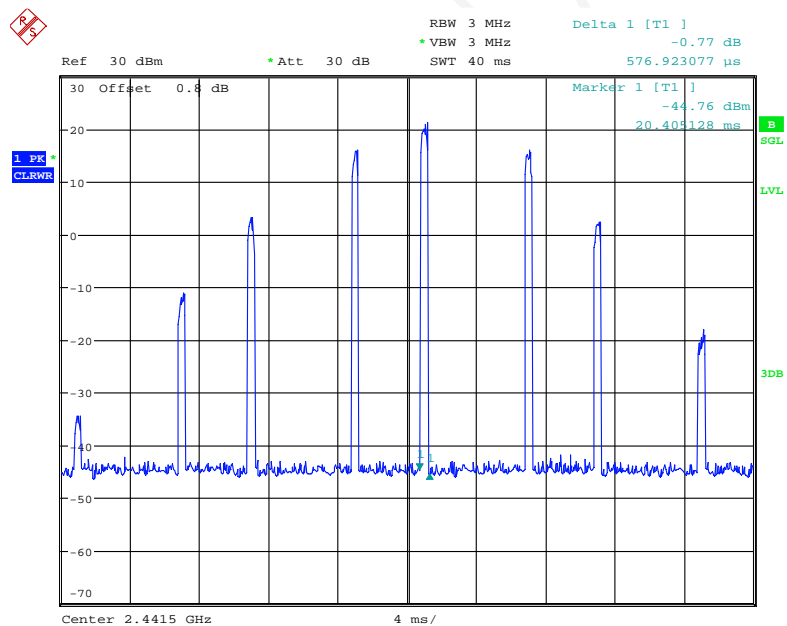

Date: 19.NOV.2018 16:37:38

INTERFERENCE PREVENTION FUNCTION

Requirement

The EUT shall have the interference prevention capability to transmit or to receive the identification automatically, so that sender and receiver shall exclude other equipment.

Test Procedure

In the case that the EUT has the function of automatically transmitting the identification code:

1. Transmit the predetermined identification codes from EUT
2. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

1. Transmit the predetermined identification codes from the counterpart.
2. Check if communication is normal
3. Transmit the signal other than predetermined ID codes from the counterpart.
4. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

Measurement Result

Environmental Conditions

Temperature:	26.9°C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Elena Lei on 2018-11-19.

Test Result: Good


CONSTRUCTION PROTECTION CONFIRMATION

Limit

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

Confirmation Method

The EUT has shielding cover the high-frequency section except for the antenna system, the shielding can't be opened easily. Please refer the EUT photo.

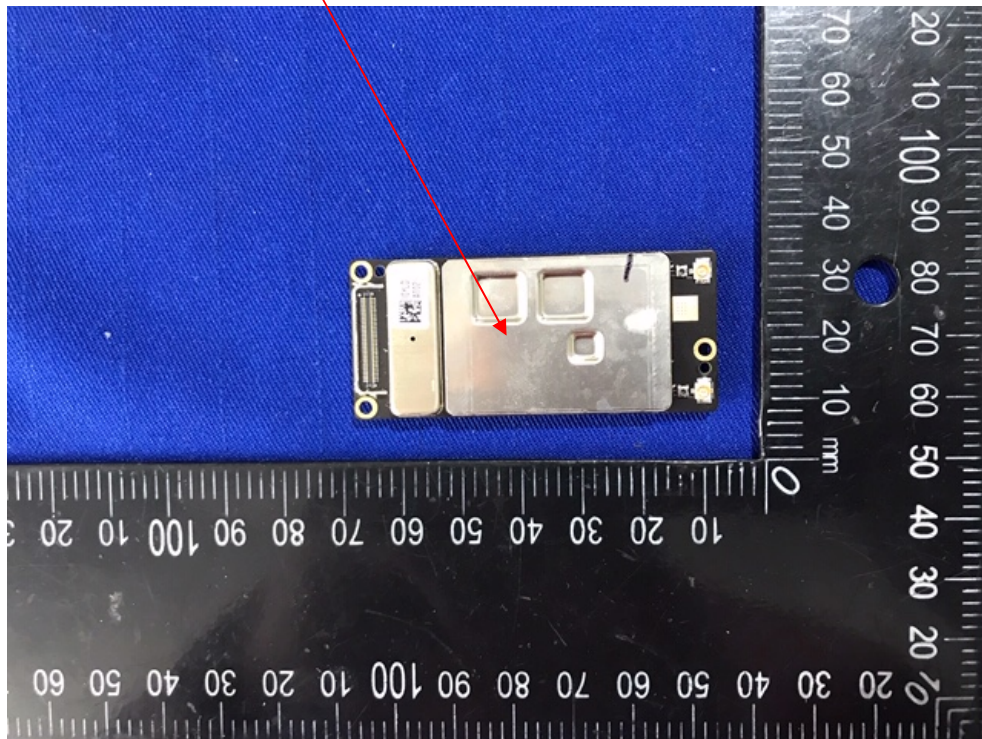

****END OF REPORT****