

TEST REPORT

of

ARIB STD-T66

Equipment Under Test : IR-PIO
Model Name : CTS-ICOM-AB
Variant Model Name(s) : CTS-ICOM-AA
Applicant : CANTOPS CO., LTD.
Manufacturer : CANTOPS CO., LTD.
Date of Receipt : 2022.04.12
Date of Test(s) : 2022.04.15 ~ 2022.05.02
Date of Issue : 2022.05.13

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.

Tested by:



Jangwon Lee

Technical Manager:



Haegyu Park

SGS Korea Co., Ltd. Gunpo Laboratory

Table of contents

1. General Information -----	3
2. Frequency Tolerance -----	7
3. Occupied Bandwidth (99 %) -----	10
4. Spurious Emission Intensity -----	13
5. Antenna Power -----	17
6. Secondary Radiated Emissions -----	22
7. Interference Prevention Function -----	25
8. Test Methodology & Conditions -----	26

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

1.2. Details of Applicant

Applicant : CANTOPS CO., LTD.

Address : A-1002~1008, Digital Empire BLDG, 16, Deogyong-daero 1556 beon-gil,
Yeongtong-gu, Suwon-si, Gyeonggi-do 16690 S.KOREA

1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

1.4. Description of EUT

Kind of Product	IR-PIO
Model Name	CTS-ICOM-AB
Variant Model Name	CTS-ICOM-AA
Power Supply	DC 24 V
Frequency Range	2 402 MHz ~ 2 480 MHz
Modulation Technique	GFSK
Number of Channels	79 channels
Rated Output Power	1.2 mW
Antenna Type	Chip Antenna
Antenna Gain	3 dB i

1.5. Test Equipment List

Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Authority	Cal. Method
Spectrum Analyzer	R&S	FSV30	103102	May 31, 2021	SICT	c)
Signal Generator	Agilent	E8257D	MY51501169	Mar. 04, 2022	HCT	c)
Attenuator	AEROFLEX / INMET	26A-10 dB	3	Mar. 13, 2022	SICT	c)
DC Power Supply	R&S	HMP2020	019922876	Apr. 22, 2022	SICT	c)
DIGITAL MULTIMETER	HIOKI	DT4211	N0301231	Sep. 14, 2021	SICT	c)

Note;

- a):** Calibration conducted by the National Institute of Information and Communications Technology or a designated calibration agency under Article 102-18 paragraph (1).
- b):** Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Law. (Law No. 51 of 1992)
- c):** Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- d):** Calibration conducted by using other equipment that listed above from a) to c).

1.6. Test Method

Measurement was conducted by the following test method:

The test method of Ordinance Concerning Technical Regulations Conformity Certification etc. of Specified Radio Equipment in Annex 1, the Ministry of Internal Affairs and Communication notification in Annex 43 of Article 88, Paragraph 1 or the test method more than equivalent.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:


Applied Standard : Radio Equipment Regulations and ARIB STD-T66		
Section	Test Item	Result
STD-T66 3.2	Frequency Tolerance	Complied
STD-T66 3.2	Occupied Bandwidth (99 %)	Complied
STD-T66 3.2	Spurious Emission Intensity	Complied
STD-T66 3.2	Antenna Power	Complied
STD-T66 3.3	Secondary Radiated Emissions	Complied
STD-T66 3.4	Interference Prevention Function	Complied

1.8. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL003128	2022.05.13	Initial

1.9. Information of Variant model

Model name	Information
CTS-ICOM-AB	- Open the marked part in the PCB Layout
CTS-ICOM-AA	- Short the marked part in the PCB Layout

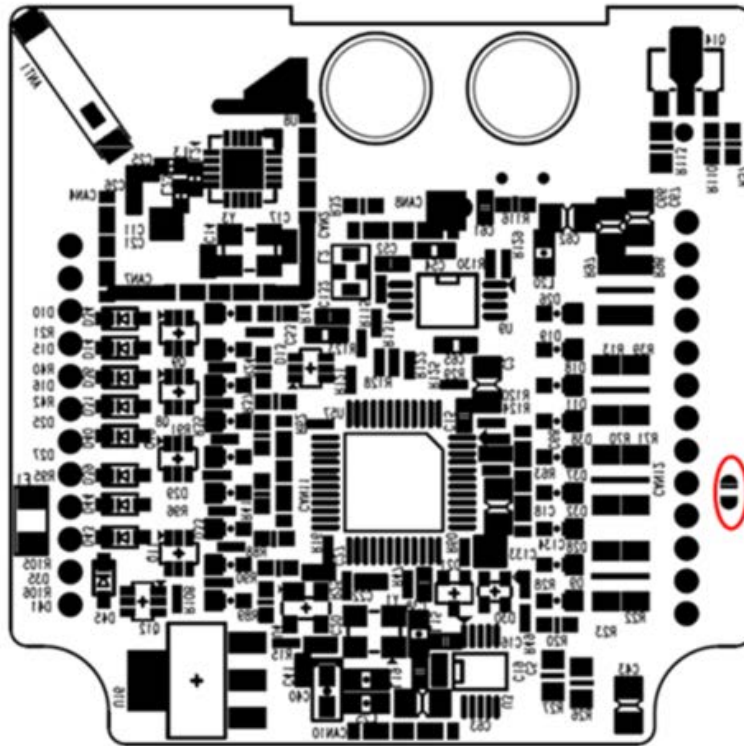


Open : CTS-ICOM-AB

Short : CTS-ICOM-AA

2. Frequency Tolerance

2.1. Test Setup

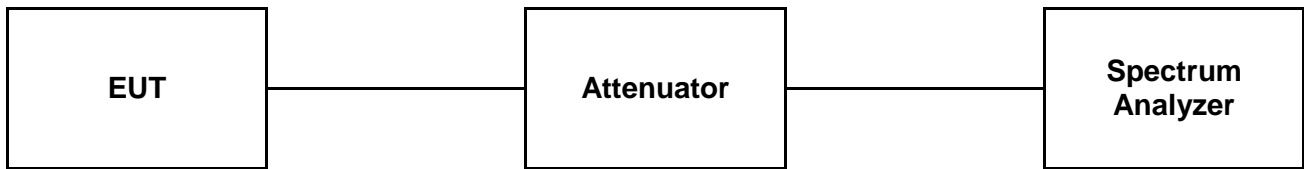

2.2. Limit

Tolerance of frequency: $\pm 50 \times 10^{-6}$ or less.

2.3. Test Procedure

1. Connect transmitter output to the spectrum analyzer input port.
2. The EUT should be transmitting at low, middle and high channels.
3. Set the spectrum analyzer as below;

Center frequency:	2 402 MHz, 2 440 MHz, 2 480 MHz
Span:	1 MHz
RBW:	10 kHz
VBW:	10 kHz
Sweep time:	Auto
Sweep data points:	1 001 or greater
Detector mode:	Positive peak
Indication mode:	Max hold

4. Find the peak carrier signal and measure its frequency.

2.4. Test Result

Ambient Temperature : (23 ± 1) °C
 Relative Humidity : 47 % R.H.

- Test Mode: Un-Modulated

Test Voltage (V)	Measured Frequency (MHz)	Reading Frequency (MHz)	Frequency Tolerance [ppm]
V _{Nom} = 24	Low Ch. (2 402)	2 402.050 000	20.82
	Middle Ch. (2 440)	2 440.051 900	21.27
	High Ch. (2 480)	2 480.051 900	20.93


Note;

1. FT (ppm) = [(RF-MF)/MF] × 10⁶


- FT: Frequency Tolerance, RF: Reading Frequency and MF: Measurement Frequency

Test Mode : Un-modulated


Low Channel

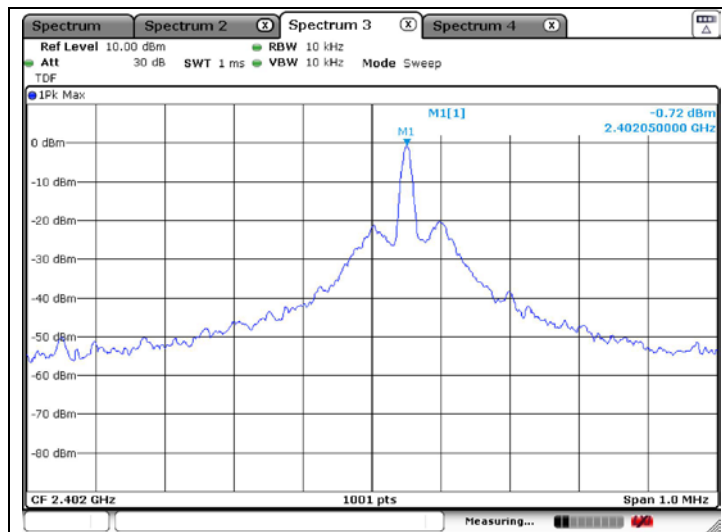

Middle Channel

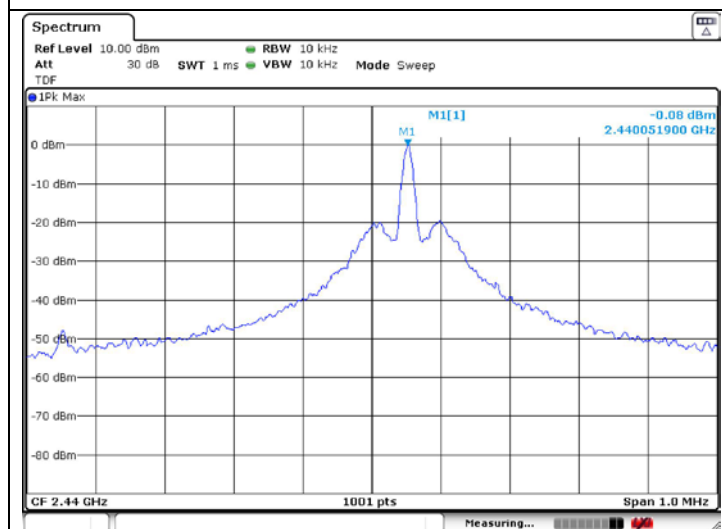

High Channel

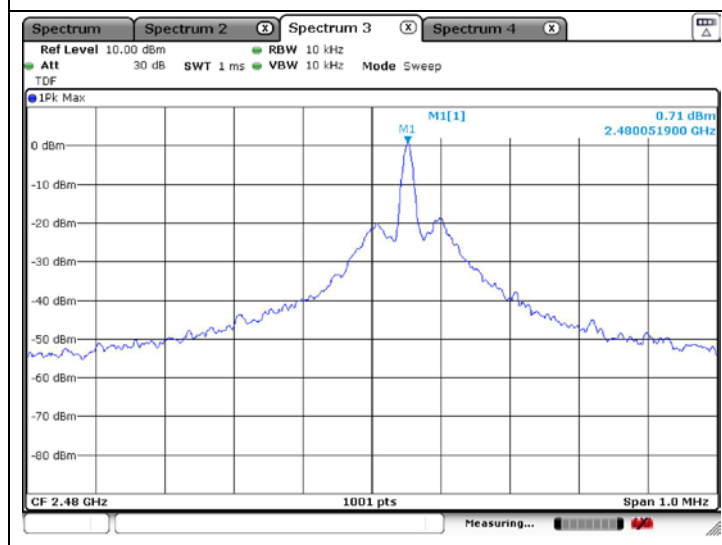

3. Occupied Bandwidth (99 %)

3.1. Test Setup



3.2. Limit

26 MHz or less

3.3. Test Procedure

1. Connect transmitter output to the spectrum analyzer input port.
2. Measure the signal bandwidth using a spectrum analyzer.
3. Set the spectrum analyzer as below;


Center frequency:	2 402 MHz, 2 440 MHz, 2 480 MHz
Span:	3 MHz
RBW:	30 kHz
VBW:	30 kHz
Sweep time:	Auto
Sweep data points:	1 001 or greater
Detector mode:	Positive peak
Indication mode:	Max hold
BW setting:	99 %

3.4. Test Result


Ambient Temperature : (23 ± 1) °C
 Relative Humidity : 47 % R.H.

Test Voltage (V)	Measured Frequency (MHz)	Occupied Bandwidth (MHz)
V _{Nom} = 24	Low Ch. (2 402)	1.04
	Middle Ch. (2 440)	1.58
	High Ch. (2 480)	1.76


Low Channel

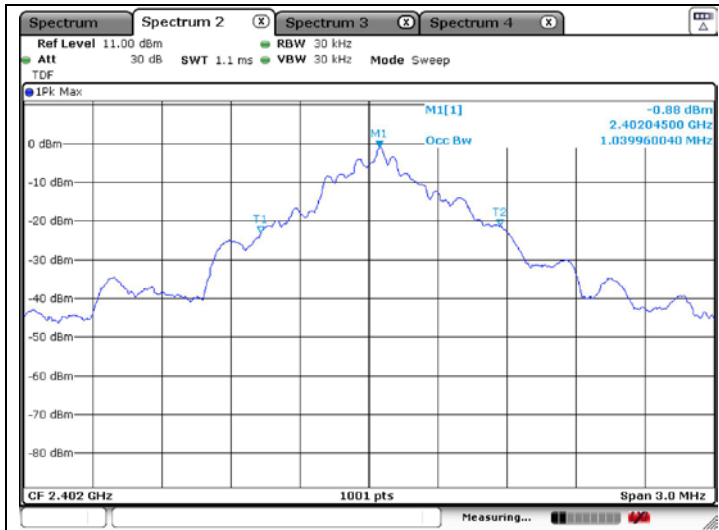

Middle Channel

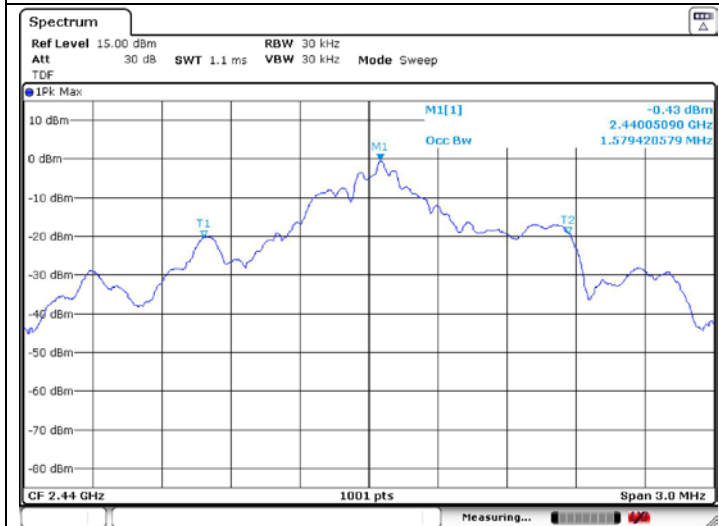

High Channel

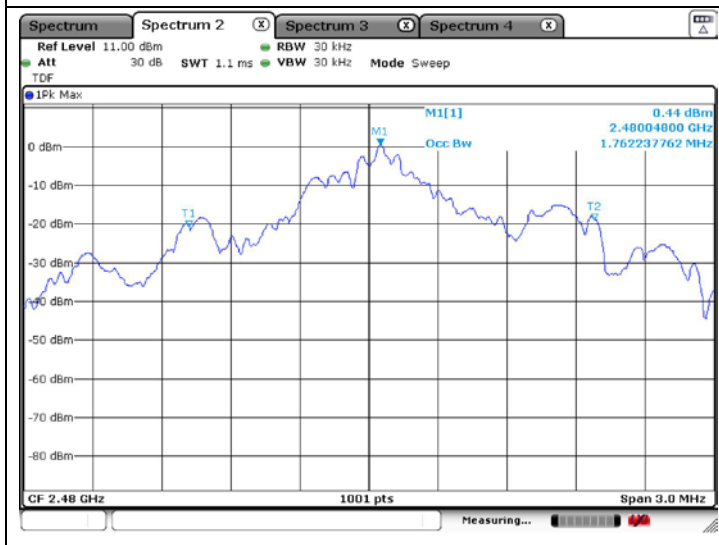

4. Spurious Emission Intensity

4.1. Test Setup



4.2. Limit

Below 2 387 MHz:	2.5 μ W (-26 dB m)/MHz or less
2 387 to 2 400 MHz:	25.0 μ W (-16 dB m)/MHz or less
2 483.5 to 2 496.5 MHz:	25.0 μ W (-16 dB m)/MHz or less
Over 2 496.5 MHz:	2.5 μ W (-26 dB m)/MHz or less

4.3. Test Procedure

1. Connect transmitter output to the spectrum analyzer input port.
2. Configure the EUT.
 - Test channels: low, middle, high

[Setting 1]

Frequency range:	30 MHz to 12.5 GHz, except for 2 400 MHz to 2 483.5 MHz
RBW:	1 MHz
VBW:	1 MHz
Sweep time:	Minimum time required to make an accurate measurement.
Sweep data points:	1 001 or greater
Detector mode:	Positive peak
Indication mode:	Max hold

Note: sweep shall be repeated until the max hold waveform is stable.

[Setting 2]

Center frequency:	Frequency of spurious emission found using [Setting 1]
Span:	0 Hz
RBW:	1 MHz
VBW:	1 MHz
Sweep:	Minimum time required to make an accurate measurement. For burst type (intermittent) spurious, sweep time shall be greater than one burst interval
Sweep data points:	1 001 or greater
Detector mode:	Sample

[Setting 3]

Frequency range:	2 374 MHz to 2 400 MHz 2 483.5 MHz to 2 509.5 MHz
RBW:	30 kHz
VBW:	30 kHz
Sweep time:	Minimum time required to make an accurate measurement.
Sweep data points:	1 001 or greater
Detector mode:	Positive peak
Indication mode:	Max hold

3. After configuring the spectrum analyzer to [Setting 1], search for spurious emissions from 30 MHz to 12.5 GHz. If spurious emissions greater than [Limit – 3 dB] are found, then more detailed measurements are required, go to step (4).

4. Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time. If spurious emissions ranging from 30 MHz to 2 374 MHz and from 2 509.5 MHz to 12.5 GHz are over the limit, then the test result is 'Fail'.

If spurious emissions ranging 2 374 MHz to 2 400 MHz and 2 483.5 MHz to 2 509.5 MHz are over the limit, then further detailed measurements are required, go to step (5).

5. Measure the spurious emissions using [Setting 3].

6. Calculate the spurious value (Calculated Value) using following formula:

Calculated Value = (Measured Value using [Setting 2] + 15.2 dB)

Note: 15.2 dB adjustment is derived from the Conversion Factor of RBW

Conversion Factor of RBW = $10 \times \log (\text{Reference Bandwidth} / \text{RBW of measurement}) = 15.2 \text{ [dB]}$

Where: Reference Bandwidth = 1 MHz


RBW of measurement = 30 kHz

4.4. Test Result


Ambient Temperature : (23 ± 1) °C
 Relative Humidity : 47 % R.H.

Test Voltage	Frequency Range (MHz)	Measured	Low Ch. (2 402 MHz)	Middle Ch. (2 440 MHz)	High Ch. (2 480 MHz)	Limit
V _{Nom} = 24	Below 2 387	Frequency (GHz)	2.384	1.220	1.240	-
		Level (dB m/MHz)	-40.46	-45.43	-43.74	-26
		Level (μW/MHz)	0.089 950	0.028 642	0.042 267	2.5
	2 387 to 2 400	Frequency (GHz)	2.400	2.392	2.389	-
		Level (dB m/MHz)	-20.59	-44.19	-46.47	-16
		Level (μW/MHz)	8.729 714	0.038 107	0.022 542	25
	2 483.5 to 2 496.5	Frequency (GHz)	2.492	2.488	2.484	-
		Level (dB m/MHz)	-45.55	-43.34	-23.78	-16
		Level (μW/MHz)	0.027 861	0.046 345	4.187 936	25
	Above 2 496.5	Frequency (GHz)	6.944	6.640	6.915	-
		Level (dB m/MHz)	-39.19	-40.32	-40.22	-26
		Level (μW/MHz)	0.120 504	0.092 897	0.095 060	2.5


Low Channel

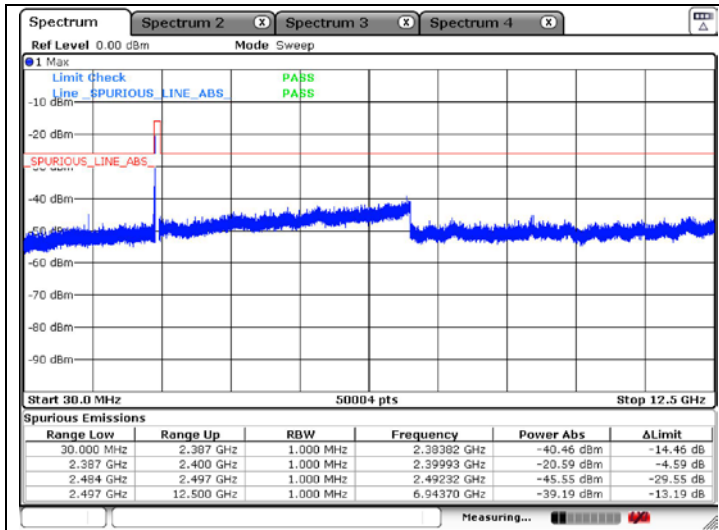

Middle Channel

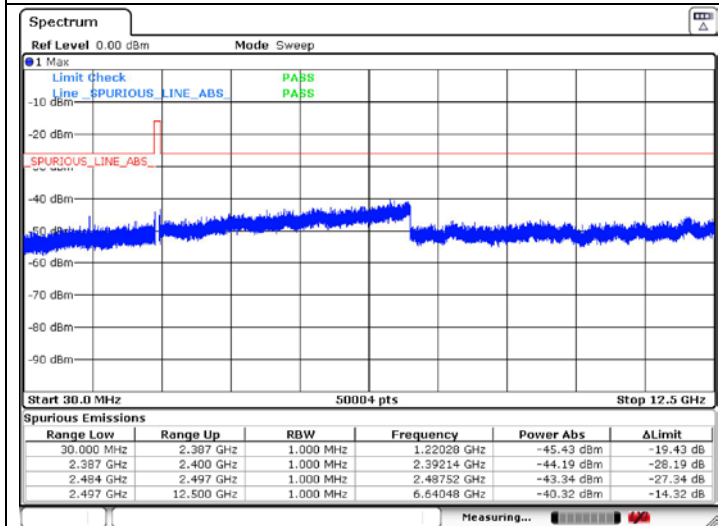

High Channel

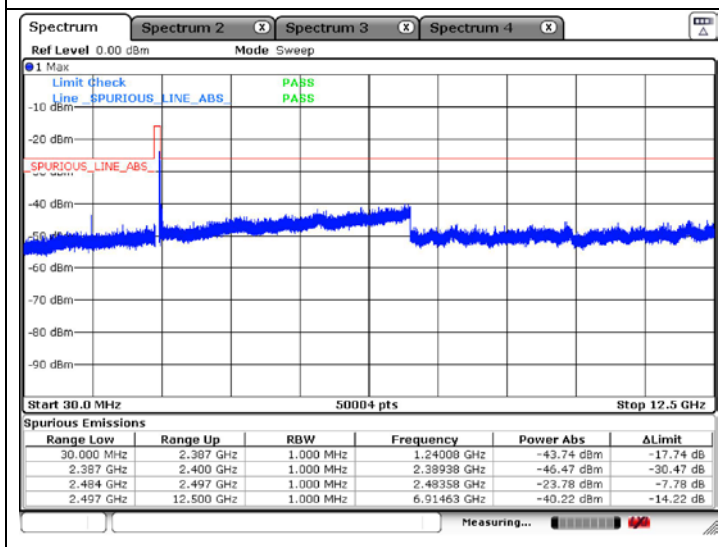

5. Antenna Power

5.1. Test Setup



5.2. Limit

The difference between measured output power and the rated output power shall be within a tolerance of +20 % to -80 %. In addition, the rated output power shall not be over the limits shown below.

Limit (rated output power, upper limit)

- 10 mW or less

5.3. Test Procedure

1. Connect transmitter output to the spectrum analyzer input port.
2. Configure the spectrum analyzer as below;

[Setting 1] – Search for peak power frequency

Center frequency: 2 402 MHz, 2 440 MHz, 2 480 MHz

Span: 3 MHz

RBW: 1 MHz

VBW: 3 MHz

Sweep time: Auto

Sweep data points: 1 001 or greater

Detector mode: Positive peak

Indication mode: Max hold

[Setting 2] – Measurement of average antenna power

Center frequency: Frequency of peak power

Span: 0 Hz

RBW: 1 MHz

VBW: 1 MHz

Sweep: Minimum time required to make an accurate measurement.

For burst type (intermittent) transmission, sweep time shall be greater than one burst Interval.

Sweep data points: 1 001 or greater

Detector mode: Sample

3. After configuring the spectrum analyzer to [Setting 1], find the frequency of maximum transmitted power.
4. After configuring the spectrum analyzer to [Setting 2], measure the Average Burst Power of the frequency Found in (3).

5.4. Test Result

Ambient Temperature : (23 ± 1) °C
 Relative Humidity : 47 % R.H.


Test Voltage	Channel	Antenna Gain (dBi)	Rated Output Power		E.I.R.P. (dBm)	Average Burst Power		Power Tolerance (%)
V _{Nom} = 24	Low Ch. (2 402 MHz)	3.00	1.20 mW	0.79 dBm	3.79	0.85 mW	-0.71 dBm	-29.25
	Middle Ch. (2 440 MHz)	3.00	1.20 mW	0.79 dBm	3.79	0.94 mW	-0.25 dBm	-21.33
	High Ch. (2 480 MHz)	3.00	1.20 mW	0.79 dBm	3.79	1.18 mW	0.71 dBm	-1.83

Note;


Antenna Power (mW) = Average Burst Power (mW)

Power Tolerance (%) = {[Antenna Power (mW) - Rated Output Power (mW)] ÷ Rated Output Power (mW)} × 100


Low channel

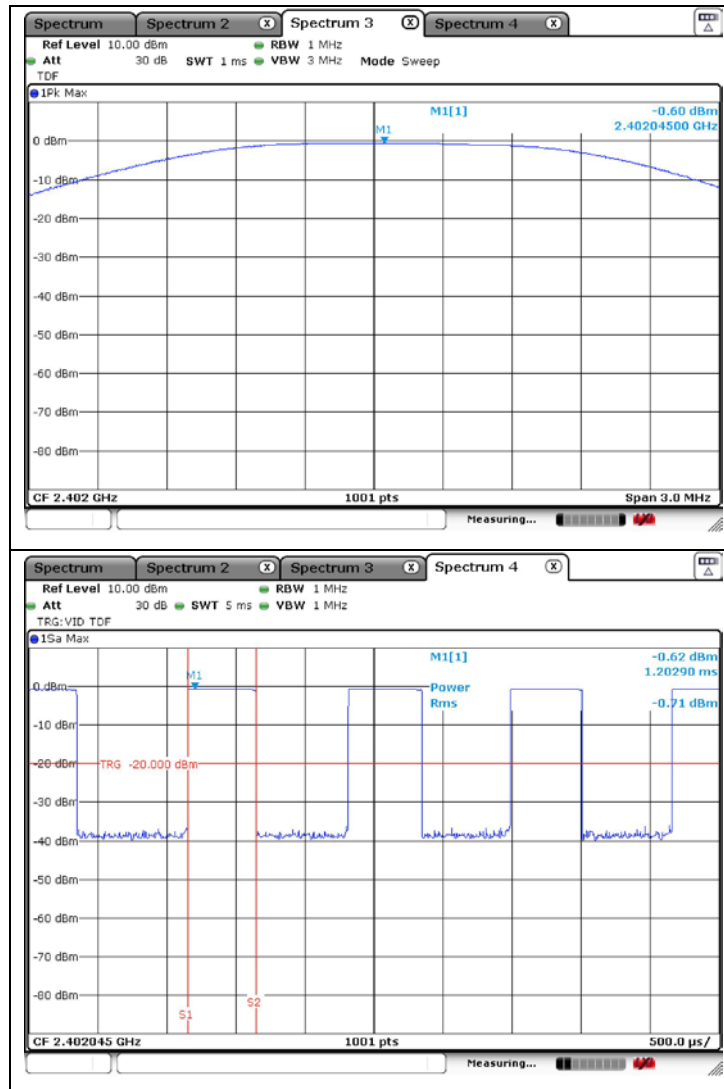

Middle channel

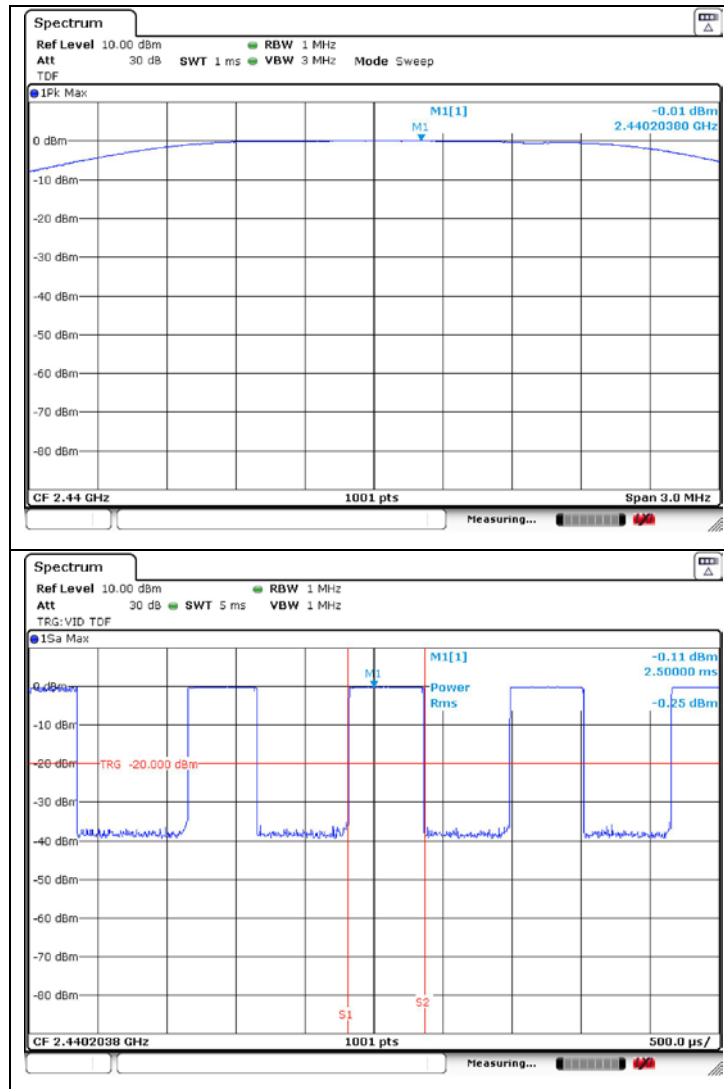


High channel

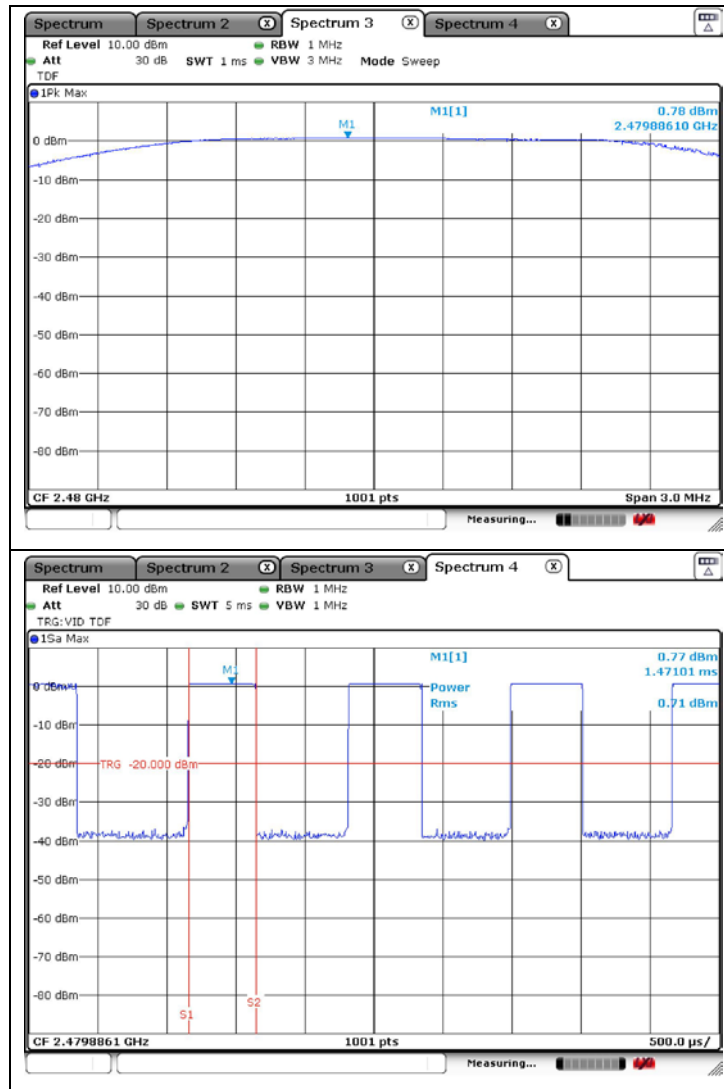

6. Secondary Radiated Emissions

6.1. Test Setup

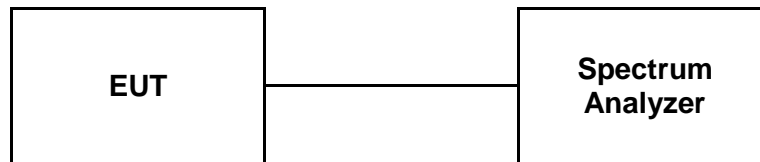

6.2. Limit

Below 1 GHz : 4 nW (-54 dB m) or less
 Above 1 GHz : 20 nW (-47 dB m) or less

6.3. Test Procedure

1. Connect transmitter output to the spectrum analyzer input port.
2. The EUT should be receiver at low, middle and high channel.
3. Secondary Radiated Emissions is measured by following setting:

[Setting 1]

Frequency range: 30 MHz - 12.5 GHz
 RBW: Below 1 GHz: 100 kHz
 Above 1 GHz: 1 MHz
 VBW: Below 1 GHz: 100 kHz
 Above 1 GHz: 1 MHz
 Sweep time: Auto
 Sweep data points: 1 001 or greater
 Detector mode: Positive peak
 Indication mode: Max hold

[Setting 2]

Frequency range: Frequency of spurious emission found using [Setting 1]
 Span: 0 Hz
 RBW: Below 1 GHz: 100 kHz
 Above 1 GHz: 1 MHz
 VBW: Below 1 GHz: 100 kHz
 Above 1 GHz: 1 MHz
 Sweep time: Auto
 Sweep data points: 1 001 or greater
 Detector mode: Sample


4. Configure the spectrum analyzer to [Setting 1] and then search for spurious emissions in the range 30 MHz to 12.5 GHz. If the sweep range does not cover the required measurement frequency range then the measurement range will need to be divided into sufficient sections of size [RBW x Sweep Data Points].
5. If spurious emissions are found with an amplitude greater than [Limit - 10 dB] then perform further detailed Measurements as described in (6).
6. Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time.

6.4. Test Result


Ambient Temperature : (23 ± 1) °C
 Relative Humidity : 47 % R.H.

Test Voltage	Frequency Range	Measured	Low Ch. (2 402 MHz)	Middle Ch. (2 440 MHz)	High Ch. (2 480 MHz)	Limit
V _{Nom} = 24	30 MHz to 1 000 MHz	Frequency (GHz)	0.879	0.876	0.879	-
		Level (dB m)	-83.21	-83.17	-82.23	-54
		Level (nW)	0.004 775	0.004 819	0.005 984	4
	1 000 MHz to 12.5 GHz	Frequency (GHz)	2.747	2.748	2.747	-
		Level (dB m)	-57.39	-57.27	-57.34	-47
		Level (nW)	1.823 896	1.874 995	1.845 015	20


Low Channel

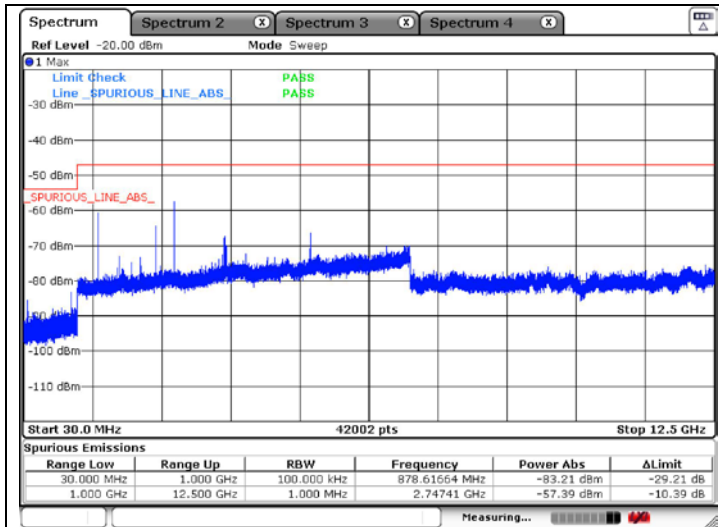

Middle Channel

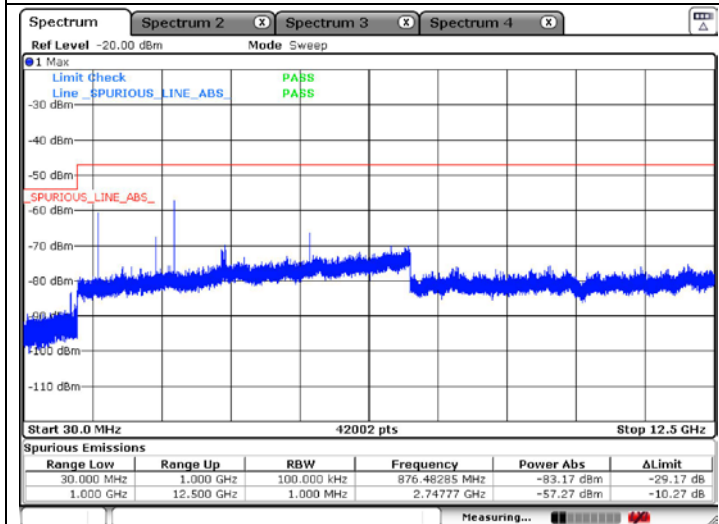

High Channel

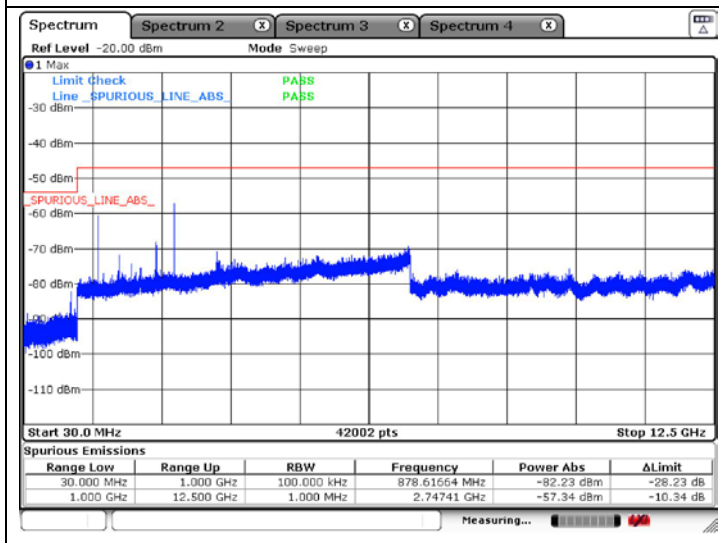

7. Interference Prevention Function

7.1. Test Procedure

- (1) For EUTs capable of automatically transmitting identification data
 - a. Transmit identification data from EUT to Demodulator
 - b. Confirm identification data is correctly received by Demodulator
- (2) For EUTs capable of automatically receiving identification data
 - c. Transmit identification data from Link Partner to EUT
 - d. Confirm communication link is established
 - e. Link Partner shall respond by transmitting different identification data back to the EUT
 - f. Confirm EUT stops transmitting, or confirm EUT recognizes that the two identification data are different

If the applicant has documentary evidence to show that their EUT complies with the requirements of the Interference Prevent Function then the EUT can be exempt from this test.

7.2. Test Result

EUT Details :

A=AB95-ABCDEF

The unit does meet the requirements. (Pass)

8. Test Methodology & Conditions

8.1. Test Condition

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Voltage Fluctuation Test	Normal Voltage	High Voltage + 10 % of Normal Voltage	Low Voltage - 10 % of Normal Voltage
EUT Input Voltage (V_{d.c.})	24.00	26.40	21.60
RF Part Output Voltage (V_{d.c.})	3.296	3.295	3.295

Voltage Variation (%) = (Output High or Low Voltage - Output Normal Voltage) / Output Normal Voltage * 100
 During the input supply voltage to the EUT from the external power source is varied by +/- 10 % if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/- 1 %. Exempt extremely high and low supply voltage condition tests, EUT only operated in normal voltage to test all regulations.

- End of the Test Report -