



RADIO TEST REPORT

MIC Public Notice 88

Test report
On Behalf of
Shenzhen New Peak Technology Co., Ltd.
For
Wireless card

Model No.: XC-AX3000PRO, SZY-AX3000, SZY-AX3000S,
SZY-AX3000PRO, SZY-AX210, SZY-AX210S, SZY-AX210PRO,
XL-AX3000, XL-AX3000S, XL-AX3000PRO, XL-AX210,
XL-AX210S, XL-AX210PRO, XC-AX210PRO

Prepared For : Shenzhen New Peak Technology Co., Ltd.
Room 901, Building A, Xinlida Industrial Park, Junxin Road, Guanlan Street,
Longhua District, Shenzhen, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Jul. 18, 2022 ~ Jul. 29, 2022

Date of Report: Jul. 29, 2022

Report Number: HK2207183127-2E

**TEST RESULT CERTIFICATION**

Applicant's name : Shenzhen New Peak Technology Co., Ltd.

Address : Room 901, Building A, Xinlida Industrial Park, Junxin Road,
Guanlan Street, Longhua District, Shenzhen, China

Manufacture's Name : Shenzhen New Peak Technology Co., Ltd.

Address : Room 901, Building A, Xinlida Industrial Park, Junxin Road,
Guanlan Street, Longhua District, Shenzhen, China

Product description

Trade Mark: N/A

Product name : Wireless card

Model and/or type reference : XC-AX3000PRO, SZY-AX3000, SZY-AX3000S,
SZY-AX3000PRO, SZY-AX210, SZY-AX210S, SZY-AX210PRO,
XL-AX3000, XL-AX3000S, XL-AX3000PRO, XL-AX210,
XL-AX210S, XL-AX210PRO, XC-AX210PRO

Standards : MIC Public Notice 88:2004, annex 1 and annex 43

ARIB STD-T66 V3.7, Article 2 paragraph 1 item(19)

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : Jul. 18, 2022 ~ Jul. 29, 2022

Date of Issue : Jul. 29, 2022

Test Result : **Pass**

Prepared by:

Kevin Pan

Project Engineer

Reviewed by:

Sliver Wan

Project Supervisor

Approved by:

Jason Zhou

Technical Director

**Table of Contents****Page**

| | |
|-------------------------------------|----|
| 1 . TEST SUMMARY | 6 |
| 2 . GENERAL INFORMATION | 8 |
| 2.1 General Description of EUT | 8 |
| 2.2 Operation of EUT During Testing | 9 |
| 2.3 Description of Test Setup | 10 |
| 2.4 Test Conditions | 10 |
| 2.5 Measurement Instruments List | 11 |
| 3 . RF SHIELDING METHOD | 12 |
| 4. ANTENNA POWER | 13 |
| 4.1 Limit | 13 |
| 4.2 Test Setup | 13 |
| 4.3 Test Procedure | 13 |
| 4.4 Test Result | 14 |
| 5. FREQUENCY TOLERANCE | 15 |
| 5.1 Limit | 15 |
| 5.2 Test Setup | 15 |
| 5.3 Test Procedure | 15 |
| 5.4 EUT Operation During Test | 15 |
| 5.5 Test Result | 15 |
| 6. OCCUPIED FREQUENCY BANDWIDTH | 16 |
| 6.1 Limit | 16 |
| 6.2 Test Setup | 16 |
| 6.3 Test Procedure | 16 |
| 6.4 Test Result | 17 |
| 7. SPREAD BANDWIDTH | 19 |
| 7.1 Limit | 19 |
| 7.2 Test Setup | 19 |
| 7.3 Test Procedure | 19 |
| 7.4 Test Result | 20 |
| 8. DWELL TIME | 22 |
| 8.1 Limit | 22 |
| 8.2 Test Setup | 22 |
| 8.3 Test Procedure | 22 |
| 8.4 Test Result | 23 |
| 9. PROCESS GAIN | 25 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Table of Contents****Page**

| | |
|--|----|
| 9.1 Limit | 25 |
| 9.2 Test Setup | 25 |
| 9.3 Test Procedure | 25 |
| 9.4 Test Result | 25 |
| 10. TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED) | 26 |
| 10.1 Limit | 26 |
| 10.2 Test Setup | 26 |
| 10.3 Test Procedure | 26 |
| 10.4 Test Result | 27 |
| 11. INTERFERENCE PREVENTION FUNCTION | 47 |
| 11.1 Limit | 47 |
| 11.2 Measuring ID Code Software | 47 |
| 11.3 Test Setup | 47 |
| 11.4 Test Procedure | 47 |
| 11.5 Test Result | 47 |
| 12. CARRIER SENSING FUNCTION | 48 |
| 12.1 Limit | 48 |
| 12.2 Test Setup | 48 |
| 12.3 Test Procedure | 48 |
| 12.4 Test Result | 48 |
| 13. SECONDARY RADIATED EMISSIONS | 49 |
| 13.1 Limit | 49 |
| 13.2 Test Setup | 49 |
| 13.3 Test Procedure | 49 |
| 13.4 Test Result | 50 |
| 14. PHOTOGRAPH OF TEST | 51 |

**** Modified History ****

| Revision | Description | Issued Data | Remark |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Jul. 29, 2022 | Jason Zhou |
| | | | |
| | | | |

**1. TEST SUMMARY****1.1 Test Procedures and Results**

Test procedures according to the technical standards:

| Rule Section | Description of Test | Result |
|------------------------|---------------------------------------|----------|
| Transmitter Parameters | | |
| 3.2 (2) | Antenna Power (EIRP Antenna Power) | Complies |
| 3.2 (3) | Tolerances for Antenna Power | Complies |
| 3.2 (4) | Frequency Tolerance | Complies |
| 3.2 (7) | Occupied Frequency Bandwidth | Complies |
| 3.2 (8) | Spread Bandwidth | Complies |
| 3.2 (9) | Process Gain | Complies |
| 3.2 (10) | Number of Carriers | N/A |
| 3.2 (11) | Dwell Time | Complies |
| 3.2 (6) | Spurious Emissions | Complies |
| / | Interference prevention function | Complies |
| / | Carrier Sensing function | N/A |
| Receiver Parameters | | |
| 3.3 (1) | Secondary Radiated Emissions | Complies |

NOTE:

- 1) "N/A" denotes test is not applicable in this Test Report.
- 2) MIC Public Notice 88:2004, annex 1 and annex 43.
- 3) MIC Ordinance Regulating Radio Equipment Section 4.17 of Article 49.20.
- 4) Referenced in the standard ARIB STD-T66.



1.2 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|-------------------------------|---------------------|
| 1 | Conducted Emission Test | $\pm 2.71\text{dB}$ |
| 2 | Radiated Emission Test | $\pm 3.35\text{dB}$ |
| 3 | RF power, conducted | $\pm 0.37\text{dB}$ |
| 4 | Spurious emissions, conducted | $\pm 0.11\text{dB}$ |
| 5 | All emissions, radiated(<1G) | $\pm 3.90\text{dB}$ |
| 6 | All emissions, radiated(>1G) | $\pm 4.28\text{dB}$ |



2. GENERAL INFORMATION

2.1 General Description of EUT

| | |
|------------------------|---|
| Equipment | Wireless card |
| Model Name | XC-AX3000PRO |
| Serial No | SZY-AX3000, SZY-AX3000S, SZY-AX3000PRO, SZY-AX210, SZY-AX210S, SZY-AX210PRO, XL-AX3000, XL-AX3000S, XL-AX3000PRO, XL-AX210, XL-AX210S, XL-AX210PRO, XC-AX210PRO |
| Model Difference | All model's the function, software and electric circuit are the same, only with a product model named different. Test sample mode: XC-AX3000PRO. |
| Antenna Type | External Antenna |
| Antenna Gain | 3dBi |
| BT Operation frequency | 2402-2480MHz |
| Number of Channels | 79CH |
| Modulation Type | GFSK, Pi / 4DQPSK, 8-DPSK |
| Data Rate | 1Mbps, 2Mbps, 3Mbps |
| Firmware Version | V63 |
| Hardware Version | V63 |
| Power Source | DC 3.3V |
| Power Rating | DC 3.3V |



2.1.1 Carrier Frequency of Channels

| Channel List | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00 | 2402 | 27 | 2429 | 54 | 2456 |
| 01 | 2403 | 28 | 2430 | 55 | 2457 |
| 02 | 2404 | 29 | 2431 | 56 | 2458 |
| 03 | 2405 | 30 | 2432 | 57 | 2459 |
| 04 | 2406 | 31 | 2433 | 58 | 2460 |
| 05 | 2407 | 32 | 2434 | 59 | 2461 |
| 06 | 2408 | 33 | 2435 | 60 | 2462 |
| 07 | 2409 | 34 | 2436 | 61 | 2463 |
| 08 | 2410 | 35 | 2437 | 62 | 2464 |
| 09 | 2411 | 36 | 2438 | 63 | 2465 |
| 10 | 2412 | 37 | 2439 | 64 | 2466 |
| 11 | 2413 | 38 | 2440 | 65 | 2467 |
| 12 | 2414 | 39 | 2441 | 66 | 2468 |
| 13 | 2415 | 40 | 2442 | 67 | 2469 |
| 14 | 2416 | 41 | 2443 | 68 | 2470 |
| 15 | 2417 | 42 | 2444 | 69 | 2471 |
| 16 | 2418 | 43 | 2445 | 70 | 2472 |
| 17 | 2419 | 44 | 2446 | 71 | 2473 |
| 18 | 2420 | 45 | 2447 | 72 | 2474 |
| 19 | 2421 | 46 | 2448 | 73 | 2475 |
| 20 | 2422 | 47 | 2449 | 74 | 2476 |
| 21 | 2423 | 48 | 2450 | 75 | 2477 |
| 22 | 2424 | 49 | 2451 | 76 | 2478 |
| 23 | 2425 | 50 | 2452 | 77 | 2479 |
| 24 | 2426 | 51 | 2453 | 78 | 2480 |
| 25 | 2427 | 52 | 2454 | | |
| 26 | 2428 | 53 | 2455 | | |

2.2 Operation of EUT During Testing

| Tested mode, channel, and data rate information | | |
|---|-------------|-----------------|
| Mode | Channel | Frequency (MHz) |
| Carrier TX Mode | CH0 | 2402 |
| | CH39 | 2441 |
| | CH78 | 2480 |
| hopping on TX Mode | CH0 to CH78 | 2402 to 2480 |
| TX Mode | CH0 | 2402 |
| | CH39 | 2441 |
| | CH78 | 2480 |
| RX Mode | CH0 | 2402 |
| | CH78 | 2480 |



2.3 Description of Test Setup

EUT

2.4 Test Conditions

The BT module was tested while in a continuous transmitter/receiver mode.

The EUT was tuned to a low, middle, and high channel for all tests. For all test case pre/scans were completed in all Modes to determine worst case levels.

Power Supply Voltage Fluctuation Test

| Voltage mode | Input Voltage | Radio Unit Voltage |
|--|---------------|--------------------|
| DC Input | DC2.97V | 3.31V |
| | DC3.30V | 3.30V |
| | DC3.63V | 3.30V |
| Note: 1 The radio unit Voltage with the module regulator IC regulator. 2 The radio unit less than 1%, so the test only rated voltage (Normal voltage) with the battery. | | |

During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.



2.5 Measurement Instruments List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------------------------|----------------------|------------|---------------|---------------|---------------|
| 1. | EMI Receiver | Rohde & Schwarz | ESCI | 100627 | Feb. 18, 2022 | 1 Year |
| 2. | LISN | SchwarzBeck | NSLK 8126 | 8126377 | Feb. 18, 2022 | 1 Year |
| 3. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Feb. 18, 2022 | 1 Year |
| 4. | EMI Test Software ES-K1 | Rohde & Schwarz | N/A | N/A | N/A | N/A |
| 5. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100627 | Feb. 18, 2022 | 1 Year |
| 6. | Trilog Broadband Antenna | SchwarzBeck | VULB9163 | VULB 9163-289 | Feb. 18, 2022 | 1 Year |
| 7. | Pre-amplifier | Compliance Direction | PAP-0203 | 22008 | Feb. 18, 2022 | 1 Year |
| 8. | EMI Test Software EZ-EMC | SHURPLE | N/A | N/A | N/A | N/A |
| 9. | EMI Receiver | Rohde & Schwarz | ESCI | 100627 | Feb. 18, 2022 | 1 Year |
| 10. | LISN | SchwarzBeck | NSLK 8126 | 8126377 | Feb. 18, 2022 | 1 Year |
| 11. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Feb. 18, 2022 | 1 Year |
| 12. | EMI Test Software ES-K1 | Rohde & Schwarz | N/A | N/A | N/A | N/A |
| 13. | EMI Receiver | Rohde & Schwarz | ESCI | 100627 | Feb. 18, 2022 | 1 Year |
| 14. | EMI Receiver | Rohde & Schwarz | ESCI | 100627 | Feb. 18, 2022 | 1 Year |
| 15. | LISN | SchwarzBeck | NSLK 8126 | 8126377 | Feb. 18, 2022 | 1 Year |
| 16. | RF Switching Unit | Compliance Direction | RSU-M2 | 38303 | Feb. 18, 2022 | 1 Year |
| 17. | EMI Test Software ES-K1 | Rohde & Schwarz | N/A | N/A | N/A | N/A |
| 18. | Power Meter | R&S | NRVD | SEL0069 | Feb. 18, 2022 | 1 Year |
| 19. | Power Sensor | R&S | URV5-Z2 | SEL0071 | Feb. 18, 2022 | 1 Year |
| 20. | Power Sensor | R&S | URV5-Z2 | SEL0072 | Feb. 18, 2022 | 1 Year |
| 21. | Software EMC32 | R&S | EMC32-S | SEL0082 | N/A | N/A |
| 22. | Log-periodic Antenna | Amplifier Research | AIFS-IP780 | SEL0073 | N/A | N/A |
| 23. | Antenna Tripod | Amplifier Research | TP1000A | SEL0074 | N/A | N/A |
| 24. | High Gain Horn Antenna(0.8-5GHz) | Amplifier Research | AT4002A | SEL0075 | N/A | N/A |
| 25. | Spectrum analyzer | Agilent | N9020A | MY499110048 | Feb. 18, 2022 | 1 Year |
| 26. | Spectrum analyzer | Agilent | E4407B | MY46184326 | Feb. 18, 2022 | 1 Year |
| 27. | DC power supply | Agilent | E3646A | N/A | Feb. 18, 2022 | 1 Year |
| 28. | Frequency Meter | KEYSIGHT | 53230A | 53200 | Feb. 18, 2022 | 1 Year |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3. RF SHIELDING METHOD

We apply the product for Japan RF certification. Number of terminals is 90, Terminal pitch is 1 mm. It is not easily removed. Please refer to following for photo for details. Red circle part of the RF module soldered on the PCB.

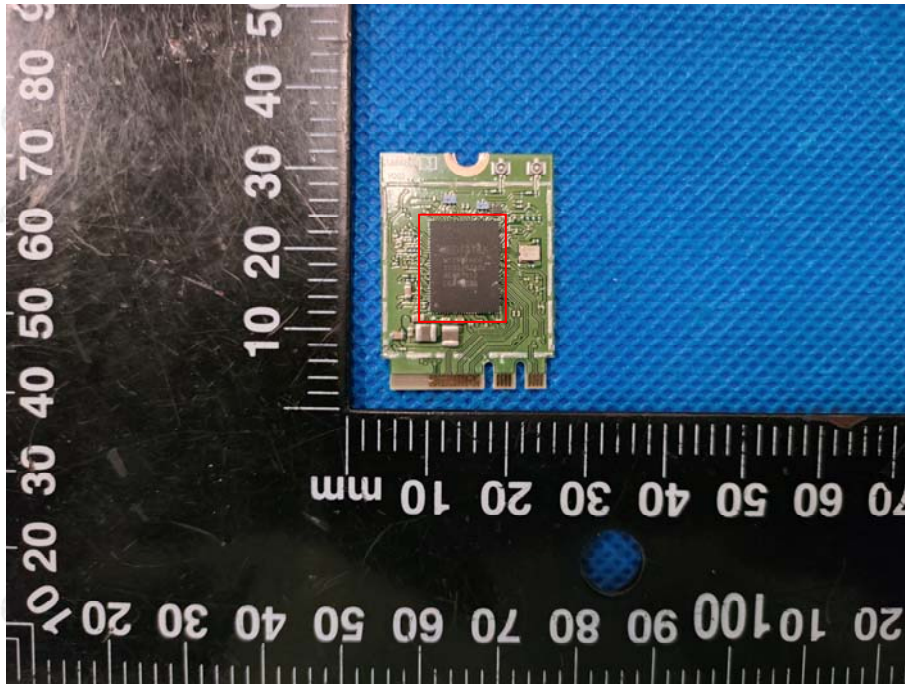




4. ANTENNA POWER

4.1 Limit

| | |
|-----------|-----------|
| Limit | 3mW/MHz |
| Tolerance | +20%,-80% |

4.2 Test Setup

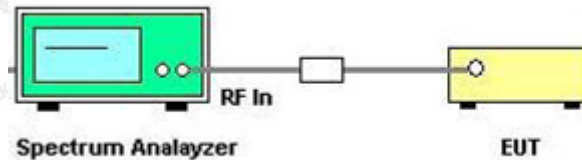

4.3 Test Procedure

- (1) Configure EUT and assistant system according to clause 2.2 and 4.3.
 - (2) Set EUT work in test mode as described in clause 2.2.
 - (3) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the channel under test.
 - Resolution BW: 1MHz (above 6dB bandwidth of signal).
 - Video BW: 1MHz.
 - Span: Wide enough to cover the complete power envelope of the signal of the EUT.
 - Detector: Peak.
 - Trace Mode: Max Hold.
 - (4) When the trace is complete, find the peak value of the power envelope and record.
- Note: The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.



4.4 Test Result

| | | | |
|--------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |

| Operation Mode: | Conducted RF output power (dbm) | Conducted RF output power (mW) | Spread Bandwidth | Conducted RF output power density (mW/MHz) | Limit | Rated power density (mW/MHz) | Antenna Power Error (%) |
|---|---------------------------------|--------------------------------|------------------|--|---------|------------------------------|-------------------------|
| GFSK mode | 3.73 | 2.360 | 71.776 | 0.033 | 3mW/MHz | 0.1 | -67.11% |
| Pi / 4DQPSK mode | 4.81 | 3.027 | 72.266 | 0.042 | 3mW/MHz | 0.1 | -58.11% |
| 8-DPSK mode | 4.65 | 2.917 | 72.327 | 0.040 | 3mW/MHz | 0.1 | -59.66% |
| Limit : +20%, -80% (Base on manufacturer declare antenna power density) | | | | | | | |

| Operation Mode: | Conducted RF output power density (mW/MHz) | Conducted RF output power density (dBm/MHz) | Antenna Gain (dBi) | EIRP(dBm/MHz) |
|------------------|--|---|--------------------|---------------|
| GFSK mode | 0.033 | -14.81 | 3 | -11.81 |
| Pi / 4DQPSK mode | 0.042 | -13.77 | 3 | -10.77 |
| 8-DPSK mode | 0.040 | -13.98 | 3 | -10.98 |




5. FREQUENCY TOLERANCE

5.1 Limit

+/- 50x 10⁻⁶ or less (50ppm)

5.2 Test Setup

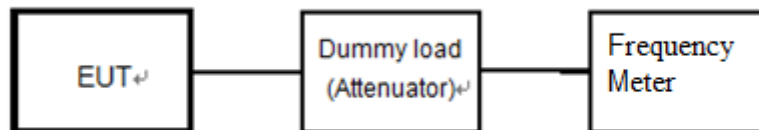

5.3 Test Procedure

1. The EUT was placed on a table which is 0.8m above ground plane.
2. The EUT was directly connected to the Frequency Meter.

5.4 EUT Operation During Test

The EUT was placed on the test table and programmed in un-modulation function.

5.5 Test Result

| | | | |
|-----------------|-----------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |
| Operation Mode: | Carrier TX mode | | |

| Test Frequency (MHz) | Measured (MHz) | Tolerance (MHz) | Result (ppm) | Limit (ppm) |
|----------------------|----------------|-----------------|--------------|-------------|
| 2402 | 2401.952 | -0.048 | -19.98 | +/-50 |
| 2441 | 2440.966 | -0.034 | -13.93 | +/-50 |
| 2480 | 2479.971 | -0.029 | -11.69 | +/-50 |




6. OCCUPIED FREQUENCY BANDWIDTH

6.1 Limit

Permissible value for occupied bandwidth using the FH system, a hybrid system combining DS and FH systems, or a hybrid system combining FH and OFDM systems shall be 83.5 MHz or less, while necessary bandwidth (minimum occupied bandwidth sufficient to ensure information transmission of required quality at a required transmission rate for the system used under specified conditions for a given emission type) using a system other than any of the above shall be 26 MHz.

6.2 Test Setup

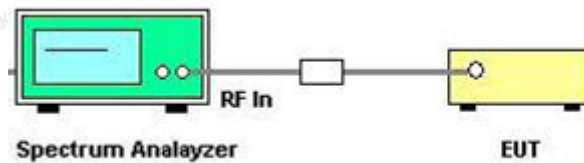

6.3 Test Procedure

- (1) Configure EUT and assistant system according to clause 2.2 and 6.3.
- (2) Set EUT to work in carrier TX mode as described in clause 2.2.
- (3) Connect the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
 - Centre Frequency: The centre frequency of the channel under test.
 - Resolution BW: 1MHz.
 - Video BW: 1MHz.
 - Span: Wide enough to cover the complete power envelope of the signal of the EUT.
 - Detector: Peak.
 - Trace Mode: Max Hold.
- (4) When the trace is complete, measure the occupied bandwidth (99% bandwidth) with the spectrum analyzer's bandwidth measure function.




6.4 Test Result

| | | | |
|--------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |


| Operation Mode (MHz) | Test Frequency (MHz) | Test Result[MHz] | Limit [MHz] | Verdict |
|--------------------------------|-------------------------|------------------|----------------|---------|
| Hopping GFSK TX Mode | / | 78.709 | <=83.5 | PASS |
| Hopping Pi / 4DQPSK TX Mode | / | 78.688 | <=83.5 | PASS |
| Hopping 8-DPSK TX Mode | / | 78.684 | <=83.5 | PASS |

GFSK TX Mode

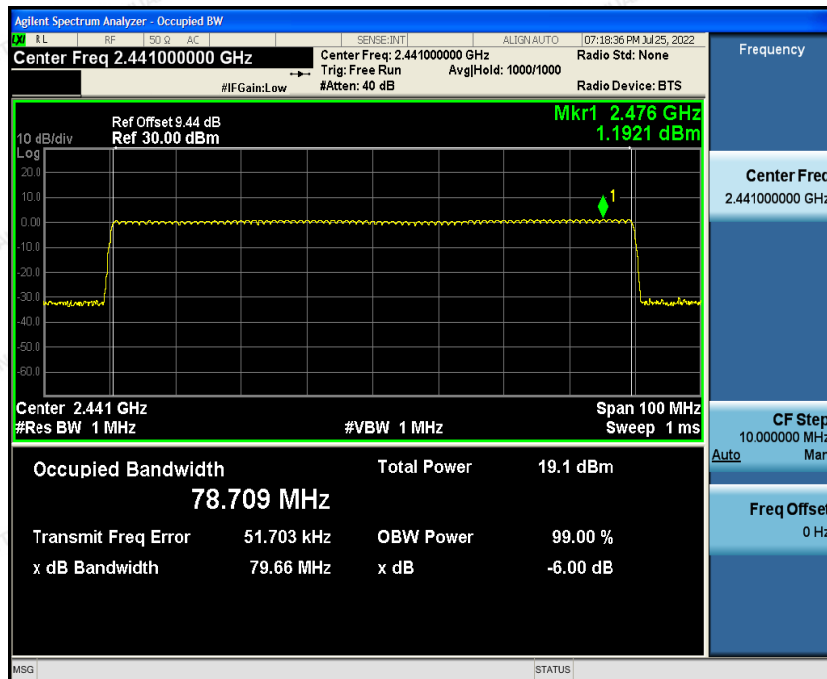




Pi / 4DQPSK TX Mode

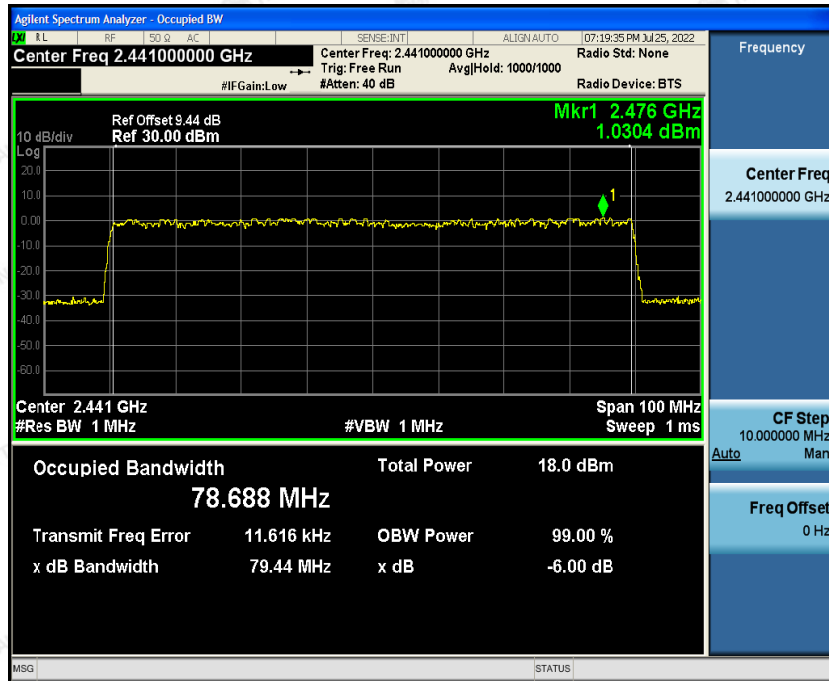

8-DPSK TX Mode

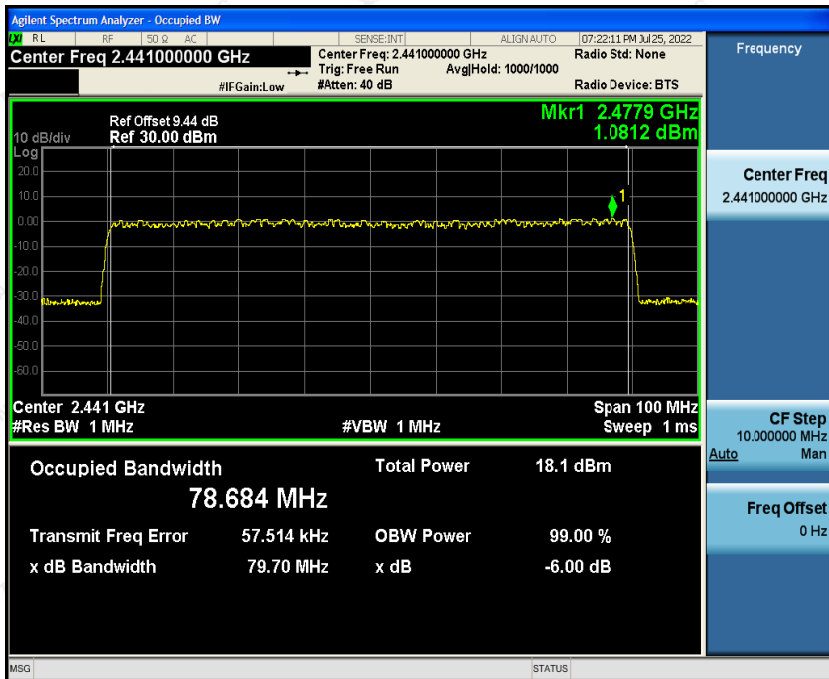




7. SPREAD BANDWIDTH

7.1 Limit

In spread spectrum systems, spread bandwidth (which refers to a frequency bandwidth with an upper limit and lower limit such that each of the mean powers radiated above the upper frequency limit and below the lower frequency limit is equal to 5 % of the total mean power radiated; this also applies hereafter) shall be 500 kHz or more.

7.2 Test Setup

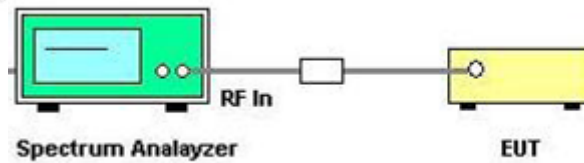

7.3 Test Procedure

(1) Configure EUT and assistant system according to clause 2.2 and 7.3.

(2) Set EUT work in carrier TX mode as described in clause 2.2.

(3) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 1MHz.

Video BW: 1MHz.

Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.

(4) When the trace is complete, measure the spread bandwidth (90% bandwidth) with spectrum analyzer's bandwidth measure function.




7.4 Test Result

| | | | |
|--------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |


| Operation Mode (MHz) | Test Channel | Test Result[MHz] | Limit [MHz] | Spread Factor | Verdict |
|-----------------------------|--------------|------------------|-------------|---------------|---------|
| Hopping GFSK TX Mode | / | 71.776 | ≥ 0.5 | 71.776 | PASS |
| Hopping Pi / 4DQPSK TX Mode | / | 72.266 | ≥ 0.5 | 36.133 | PASS |
| Hopping 8-DPSK TX Mode | / | 72.327 | ≥ 0.5 | 36.164 | PASS |

GFSK TX Mode

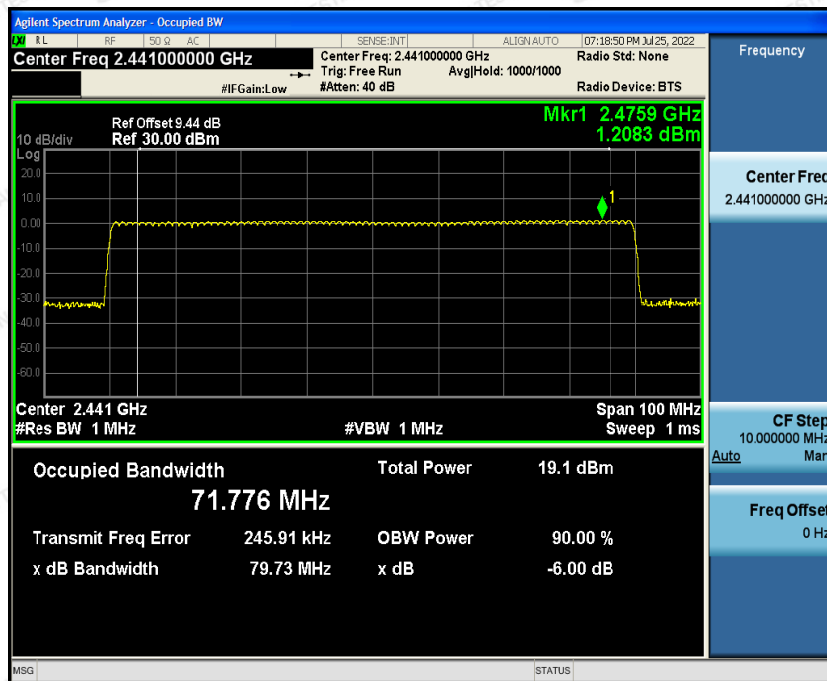




Pi / 4DQPSK TX Mode

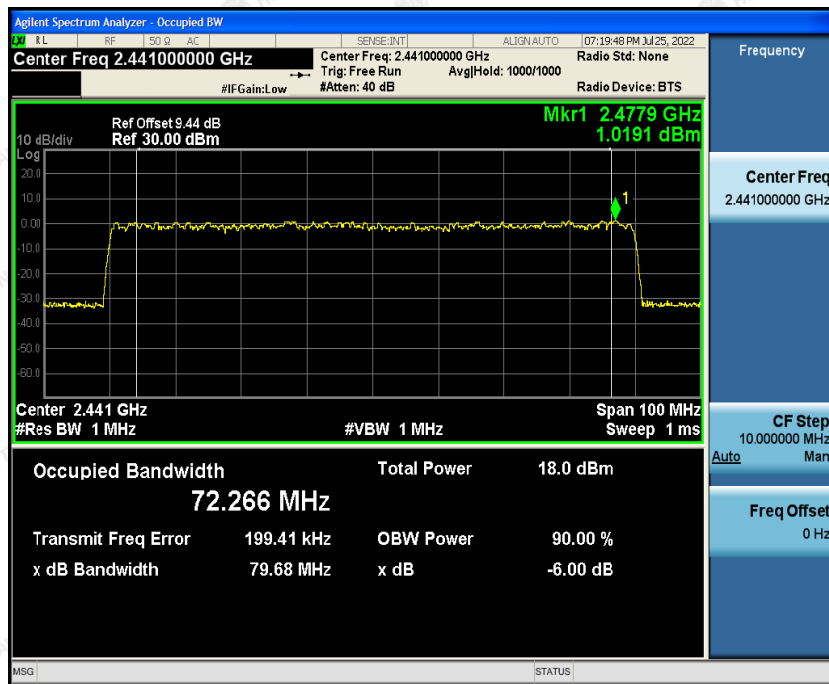

8-DPSK TX Mode

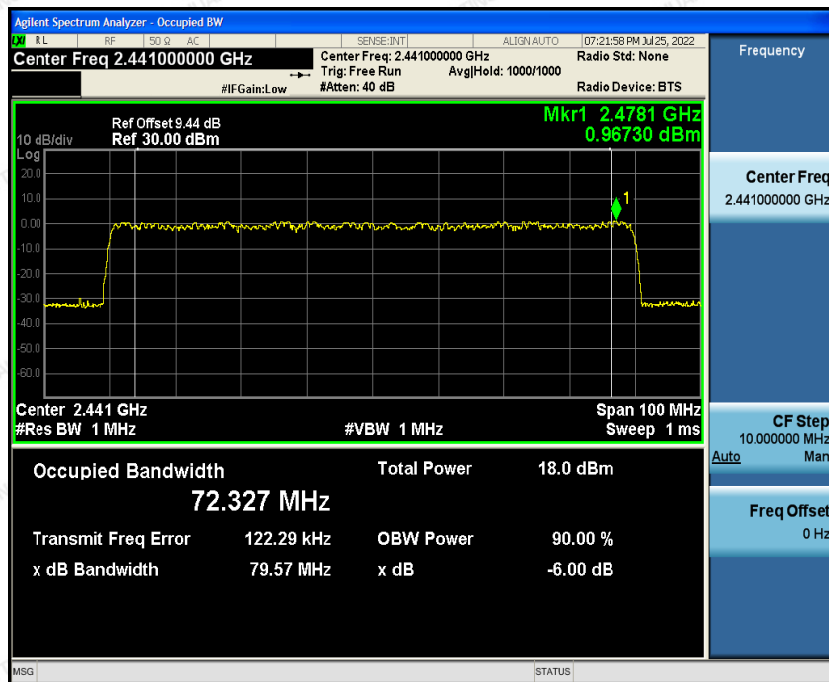




8. DWELL TIME

8.1 Limit

Frequency dwell time (time during which radio waves continue to be emitted at a specified frequency) of a transmitting equipment using the FH system shall be 0.4 seconds or less.

8.2 Test Setup

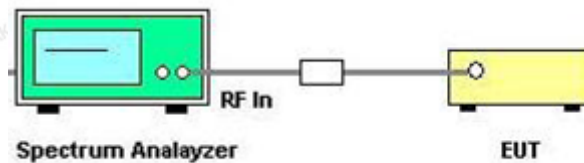

8.3 Test Procedure

- (1) Configure EUT and assistant system according clause 2.2 and 8.3.
- (2) Set EUT work in carrier TX mode as described in clause 2.2.
- (3) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
Centre Frequency: The centre frequency of the middle hopping channel.
Resolution BW: 1MHz.
Video BW: 1MHz.
Span: Zero span.
Detector: Peak.
Trace Mode: Max Hold.
Sweep: Video Trigger.
- (4) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (5) Calculate dwell time follow below formula:
$$\text{Dwell time} = (0.4(\text{s}) \times \text{spreading rate} \times \text{sending time of 1 burst(s)}) / (\text{burst cycle(s)} \times \text{No. of hopping channel})$$

$$\text{Spreading rate} = \text{Spread bandwidth (actual measurement value)} / \text{Transmission rate}.$$




8.4 Test Result

| | | | |
|-----------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |
| Operation Mode: | Hopping mode | | |


| Test Condition | Test Mode | Ant | transmission time of 1 burst (ms) | burst cycle (ms) | spreading rate | Dwell Time[s] | Limit[s] | Verdict |
|----------------|-----------|------|-----------------------------------|------------------|----------------|---------------|----------|---------|
| TNVN | DH5 | Ant1 | 2.878 | 3.751 | 71.776 | 0.2788 | <0.4 | PASS |
| TNVN | 2DH5 | Ant1 | 2.882 | 3.749 | 36.133 | 0.1406 | <0.4 | PASS |
| TNVN | 3DH5 | Ant1 | 2.884 | 3.751 | 36.164 | 0.1408 | <0.4 | PASS |

DH5

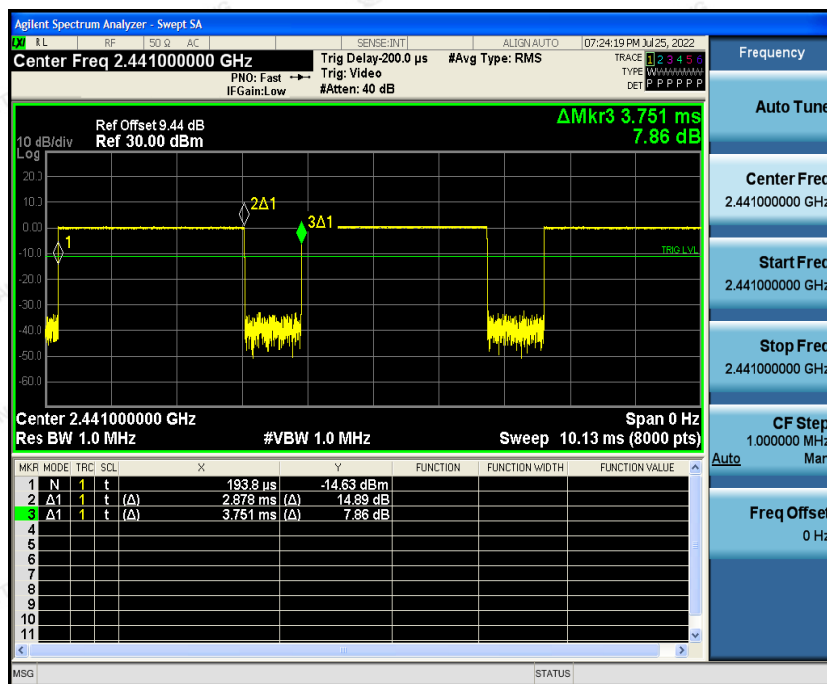




2DH5

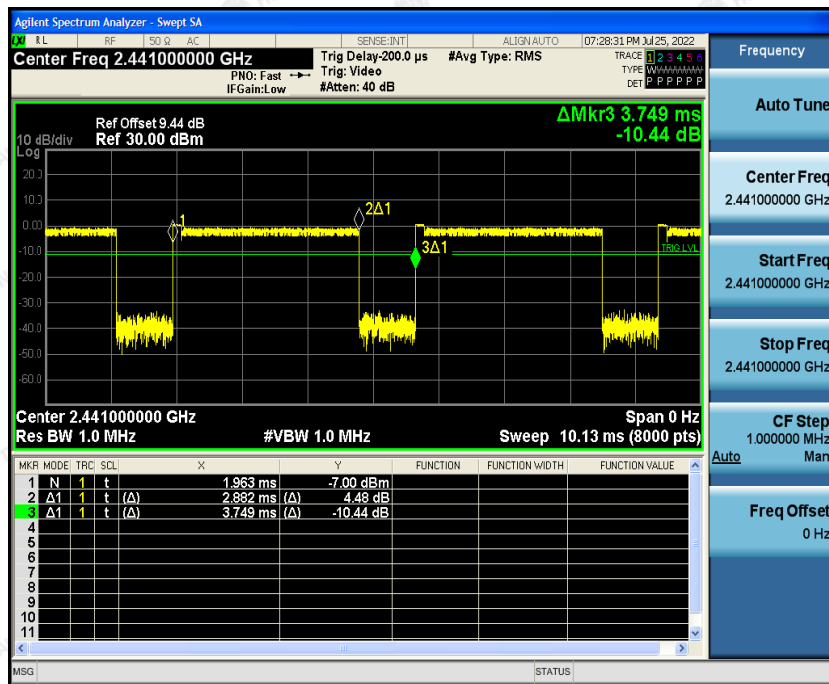

3DH5

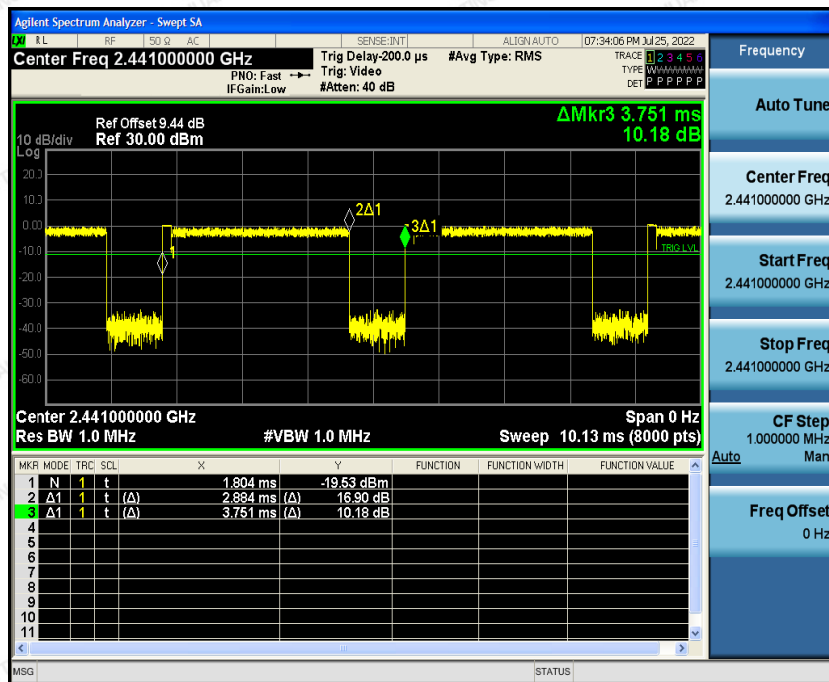




9. PROCESS GAIN

9.1 Limit

Process gain (value obtained by dividing the spread bandwidth by a frequency equal to the transmission rate of the modulation signal; this also applies hereafter) in the spread spectrum system shall be 5 or more.

9.2 Test Setup

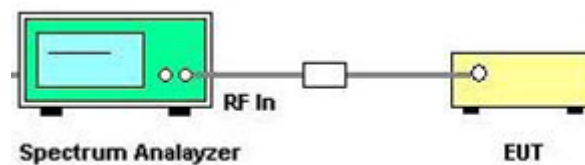

9.3 Test Procedure

- (1) Configure EUT and assistant system according clause 2.2 and 9.3.
- (2) Set EUT work in carrier TX mode as described in clause 2.2.

9.4 Test Result

| | | | |
|--------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |
| Test result: | CONFORM | | |




10. TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)

10.1 Limit

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

- a. $2,387\text{MHz} \leq f \leq 2,400\text{MHz}$ and $2,483.5\text{MHz} < f \leq 2,496.5\text{MHz}$ 25 μW or less.
- b. $2,387\text{MHz} > f$ and $2,496.5\text{MHz} < f$ 2.5 μW or less.

10.2 Test Setup

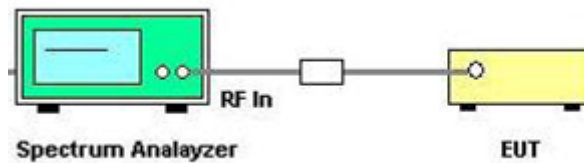

10.3 Test Procedure

- (1) Configure EUT and assistant system according to clause 2.2 and 11.3.
- (2) Set EUT work in carrier TX mode as described in clause 2.2.
- (3) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
For below 1G:
Resolution BW: 1MHz.
Video BW: 1MHz.
Detector: Peak.
Trace Mode: Max Hold.
For above 1G:
Resolution BW: 1MHz.
Video BW: 1MHz.
Detector: Peak.
Trace Mode: Max Hold.
- (4) When the trace is complete, measure the Transmitter Spurious Emissions (conducted) with spectrum analyzer's bandwidth measure function.



10.4 Test Result

| | | | |
|--------------|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |

| Test Mode | Test Channel | Ant | StartFre[MHz] | StopFre[MHz] | Max.Fre[dBm] | Max.Level[μW] | Limit[μW] | Verdict |
|-----------|--------------|------|---------------|--------------|--------------|---------------|-----------|---------|
| DH5 | 2402 | Ant1 | 30 | 2387 | -61.58 | 0.0007 | <2.5 | PASS |
| DH5 | 2402 | Ant1 | 2387 | 2400 | -43.80 | 0.0417 | <25 | PASS |
| DH5 | 2402 | Ant1 | 2483.5 | 2496.5 | -60.18 | 0.0010 | <25 | PASS |
| DH5 | 2402 | Ant1 | 2496.5 | 13000 | -56.82 | 0.0021 | <2.5 | PASS |
| DH5 | 2441 | Ant1 | 30 | 2387 | -61.01 | 0.0008 | <2.5 | PASS |
| DH5 | 2441 | Ant1 | 2387 | 2400 | -64.15 | 0.0004 | <25 | PASS |
| DH5 | 2441 | Ant1 | 2483.5 | 2496.5 | -59.97 | 0.0010 | <25 | PASS |
| DH5 | 2441 | Ant1 | 2496.5 | 13000 | -56.09 | 0.0025 | <2.5 | PASS |
| DH5 | 2480 | Ant1 | 30 | 2387 | -57.49 | 0.0018 | <2.5 | PASS |
| DH5 | 2480 | Ant1 | 2387 | 2400 | -62.73 | 0.0005 | <25 | PASS |
| DH5 | 2480 | Ant1 | 2483.5 | 2496.5 | -58.33 | 0.0015 | <25 | PASS |
| DH5 | 2480 | Ant1 | 2496.5 | 13000 | -56.79 | 0.0021 | <2.5 | PASS |
| 2DH5 | 2402 | Ant1 | 30 | 2387 | -57.23 | 0.0019 | <2.5 | PASS |
| 2DH5 | 2402 | Ant1 | 2387 | 2400 | -34.02 | 0.3963 | <25 | PASS |
| 2DH5 | 2402 | Ant1 | 2483.5 | 2496.5 | -59.57 | 0.0011 | <25 | PASS |
| 2DH5 | 2402 | Ant1 | 2496.5 | 13000 | -56.04 | 0.0025 | <2.5 | PASS |
| 2DH5 | 2441 | Ant1 | 30 | 2387 | -54.80 | 0.0033 | <2.5 | PASS |
| 2DH5 | 2441 | Ant1 | 2387 | 2400 | -62.95 | 0.0005 | <25 | PASS |
| 2DH5 | 2441 | Ant1 | 2483.5 | 2496.5 | -60.05 | 0.0010 | <25 | PASS |
| 2DH5 | 2441 | Ant1 | 2496.5 | 13000 | -56.24 | 0.0024 | <2.5 | PASS |
| 2DH5 | 2480 | Ant1 | 30 | 2387 | -61.00 | 0.0008 | <2.5 | PASS |
| 2DH5 | 2480 | Ant1 | 2387 | 2400 | -62.98 | 0.0005 | <25 | PASS |
| 2DH5 | 2480 | Ant1 | 2483.5 | 2496.5 | -53.50 | 0.0045 | <25 | PASS |
| 2DH5 | 2480 | Ant1 | 2496.5 | 13000 | -56.60 | 0.0022 | <2.5 | PASS |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China







| | | | | | | | | |
|------|------|------|--------|--------|--------|--------|------|------|
| 3DH5 | 2402 | Ant1 | 30 | 2387 | -60.77 | 0.0008 | <2.5 | PASS |
| 3DH5 | 2402 | Ant1 | 2387 | 2400 | -29.84 | 1.0375 | <25 | PASS |
| 3DH5 | 2402 | Ant1 | 2483.5 | 2496.5 | -59.38 | 0.0012 | <25 | PASS |
| 3DH5 | 2402 | Ant1 | 2496.5 | 13000 | -55.54 | 0.0028 | <2.5 | PASS |
| 3DH5 | 2441 | Ant1 | 30 | 2387 | -58.29 | 0.0015 | <2.5 | PASS |
| 3DH5 | 2441 | Ant1 | 2387 | 2400 | -63.57 | 0.0004 | <25 | PASS |
| 3DH5 | 2441 | Ant1 | 2483.5 | 2496.5 | -59.78 | 0.0011 | <25 | PASS |
| 3DH5 | 2441 | Ant1 | 2496.5 | 13000 | -55.92 | 0.0026 | <2.5 | PASS |
| 3DH5 | 2480 | Ant1 | 30 | 2387 | -60.38 | 0.0009 | <2.5 | PASS |
| 3DH5 | 2480 | Ant1 | 2387 | 2400 | -63.14 | 0.0005 | <25 | PASS |
| 3DH5 | 2480 | Ant1 | 2483.5 | 2496.5 | -53.68 | 0.0043 | <25 | PASS |
| 3DH5 | 2480 | Ant1 | 2496.5 | 13000 | -56.11 | 0.0024 | <2.5 | PASS |

Note: All mode has been test, Low and High channel is worst case.





GFSK TX Mode 2402MHz

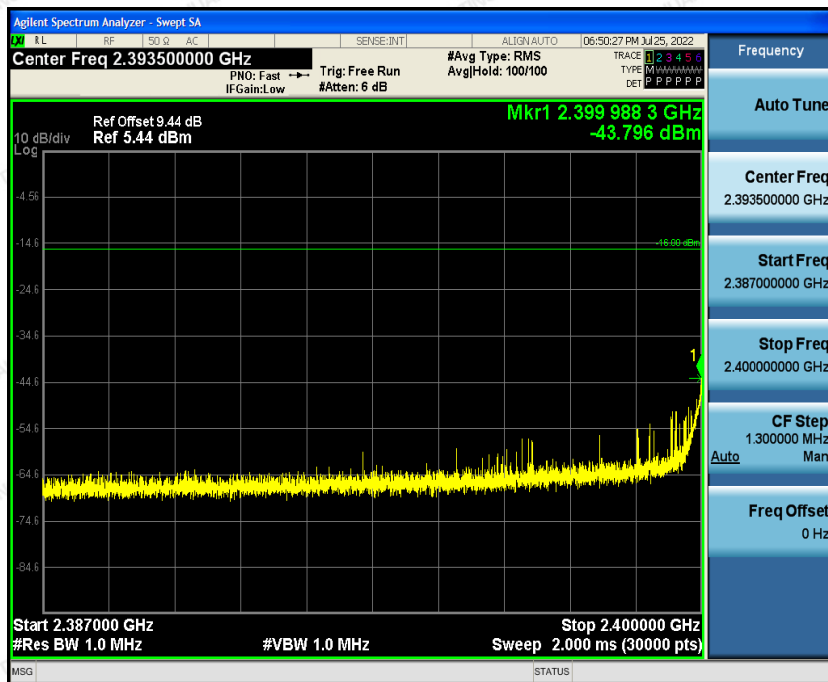
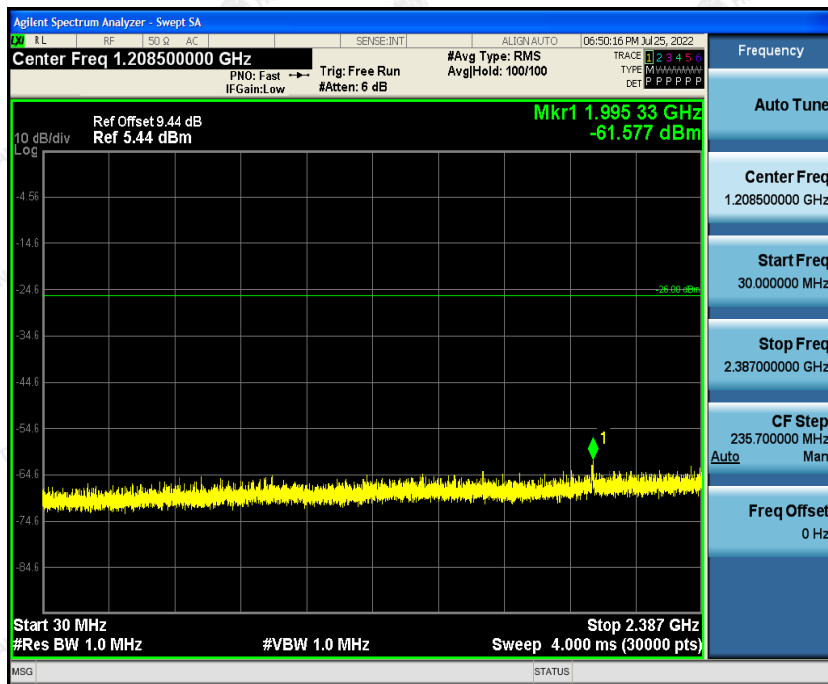


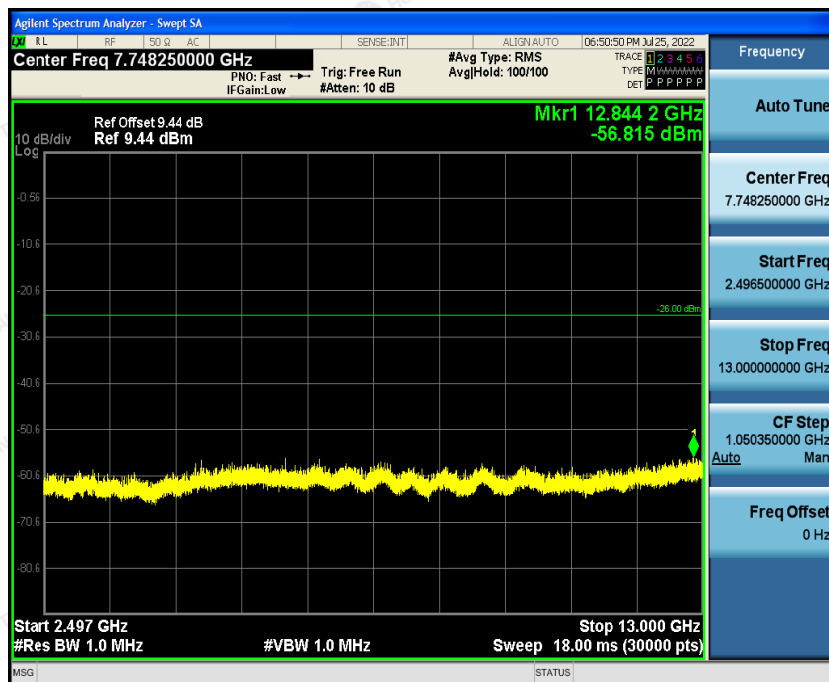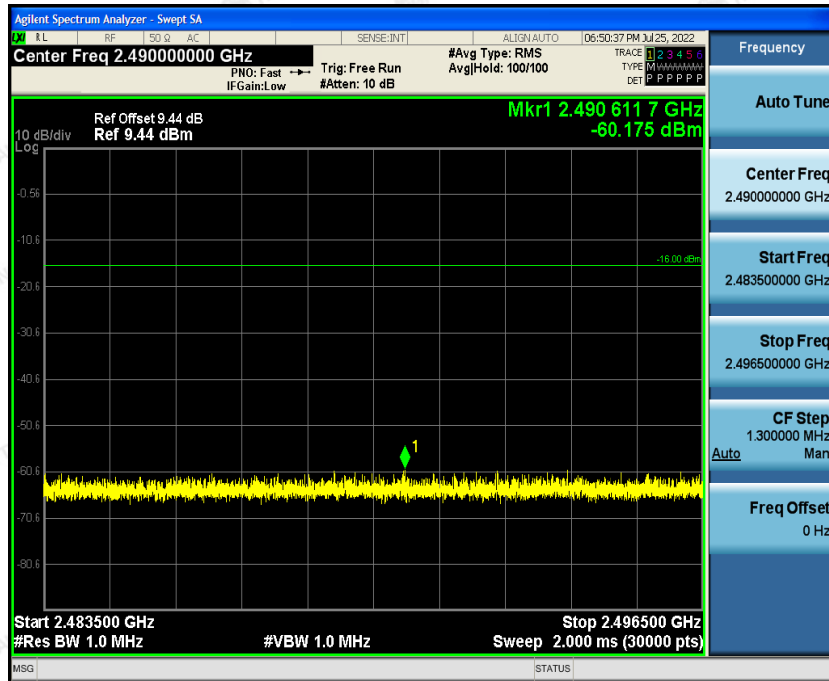



GFSK TX Mode 2441MHz

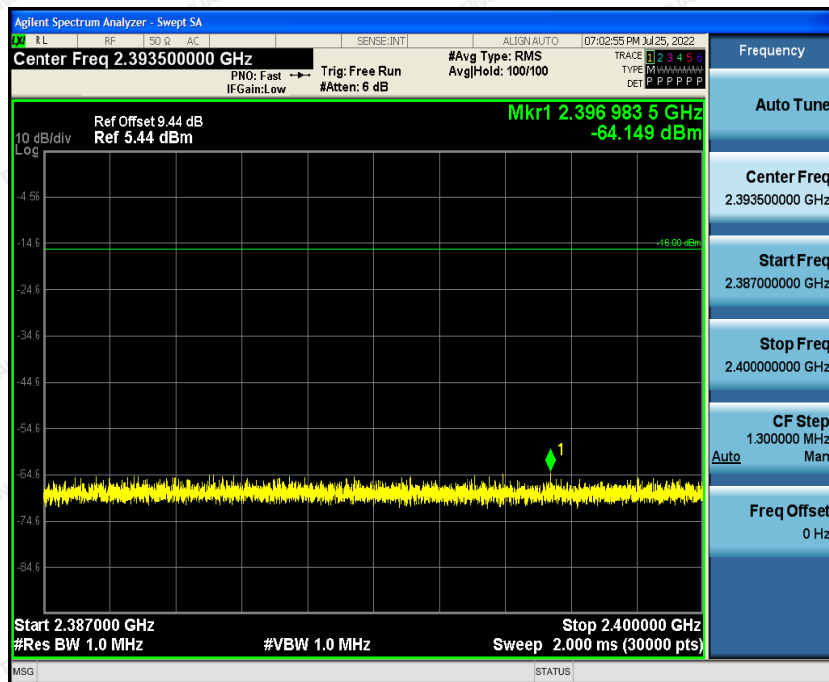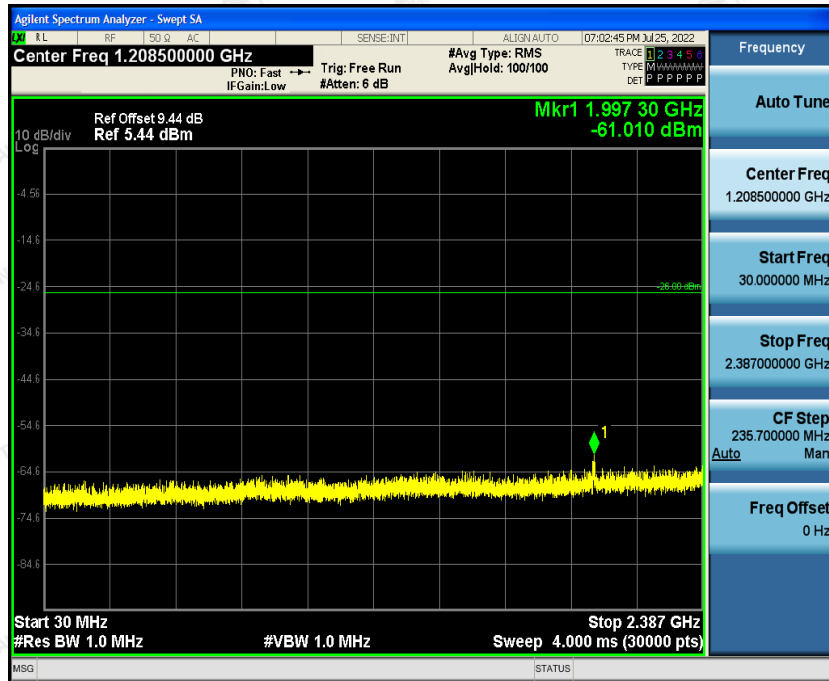

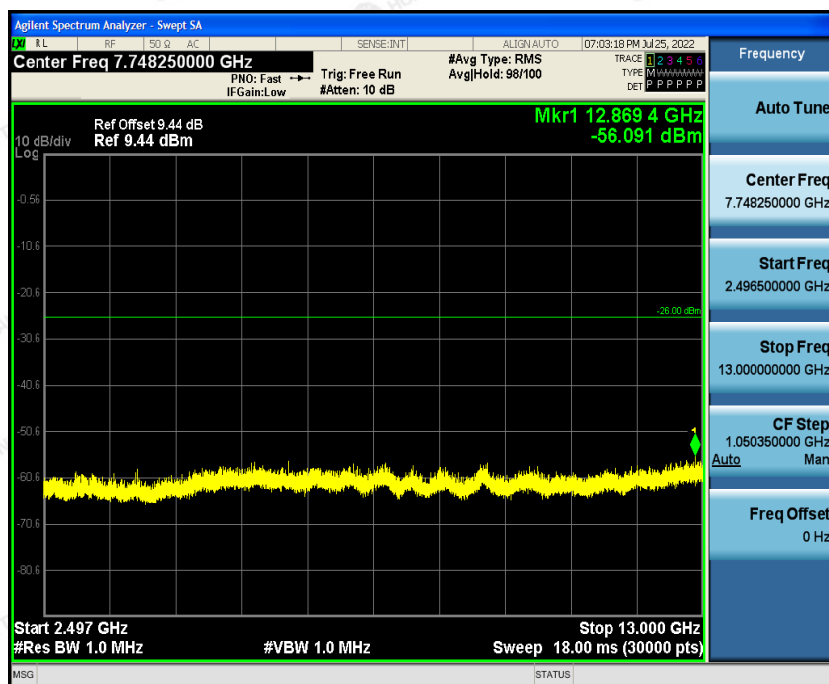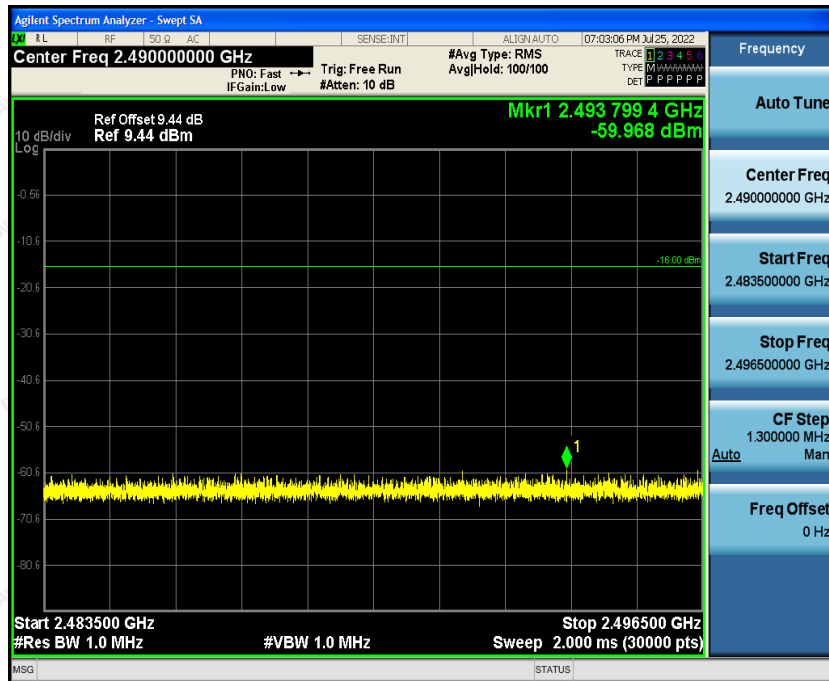



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





GFSK TX Mode 2480MHz

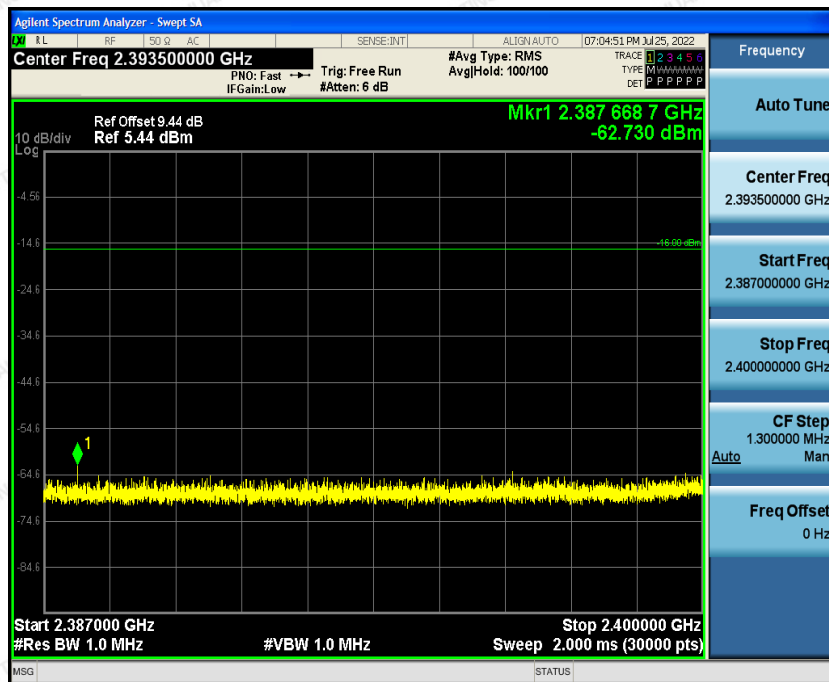
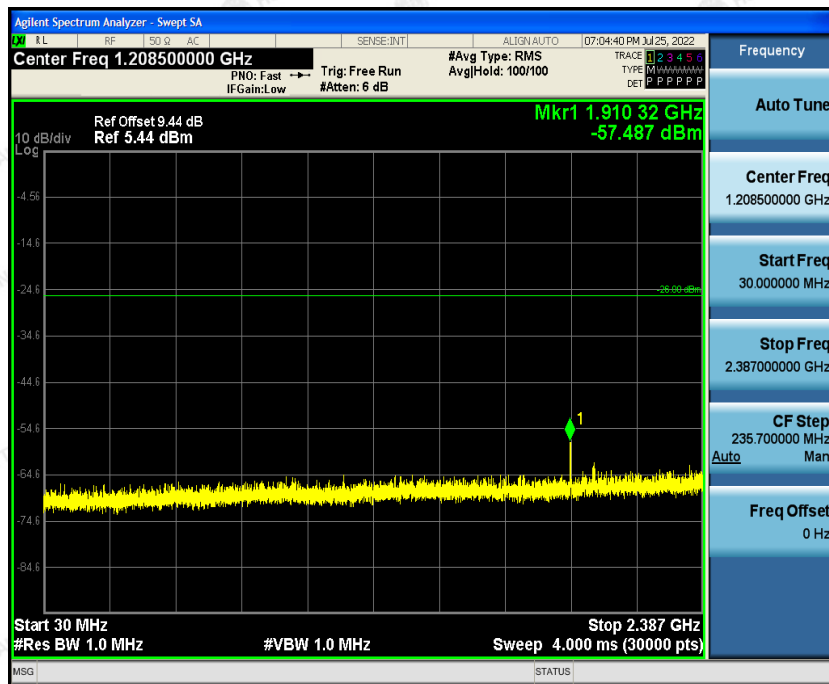


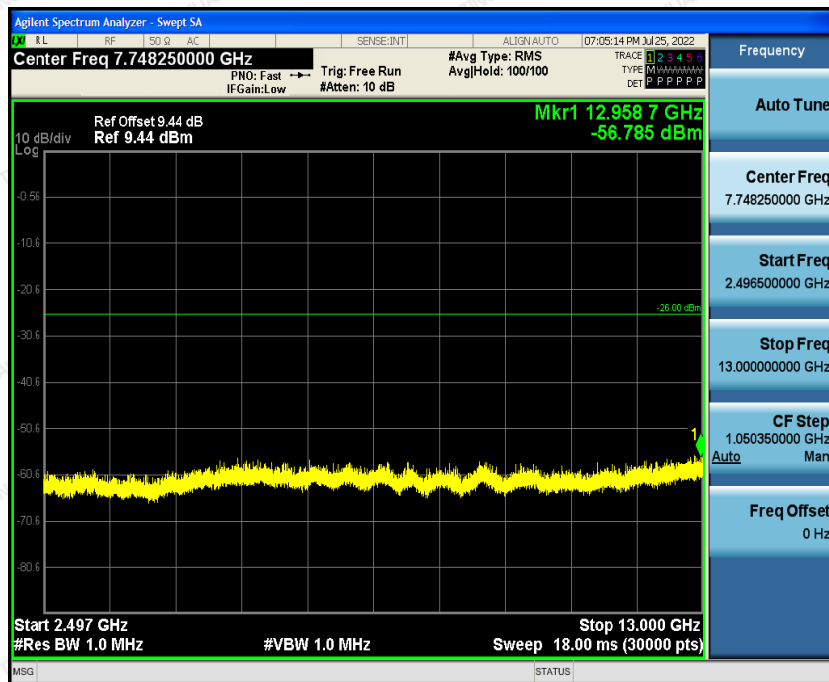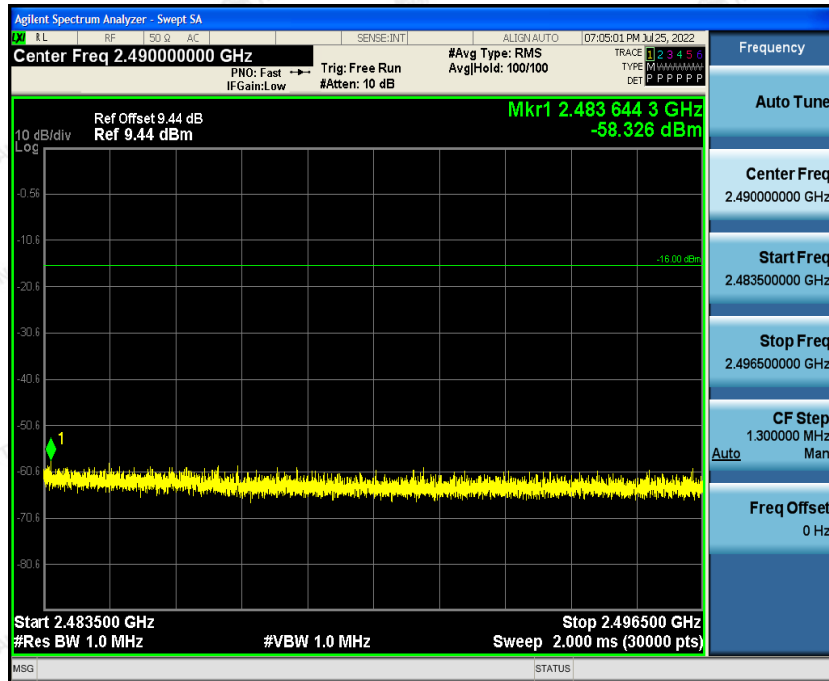





Pi / 4DQPSK TX Mode 2402MHz

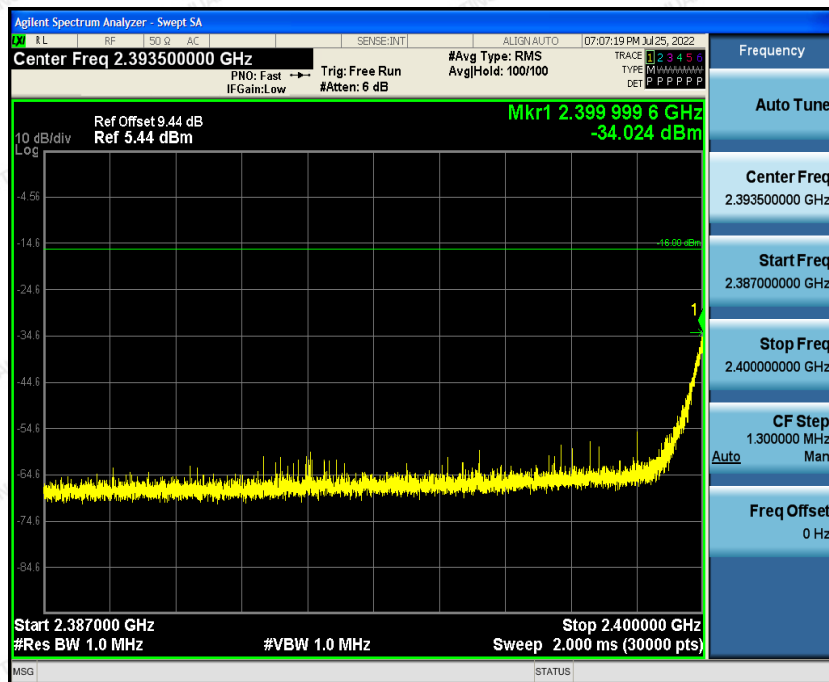
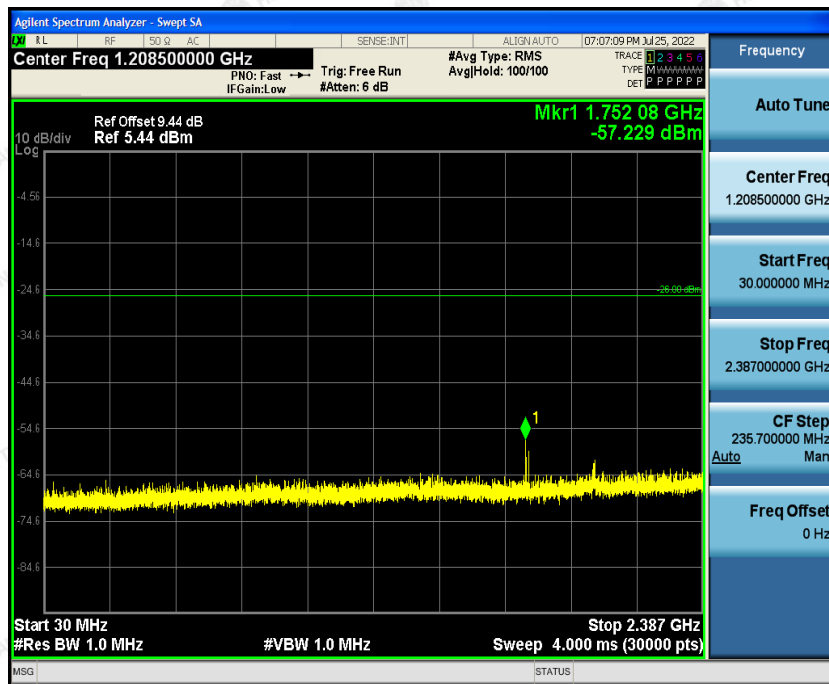


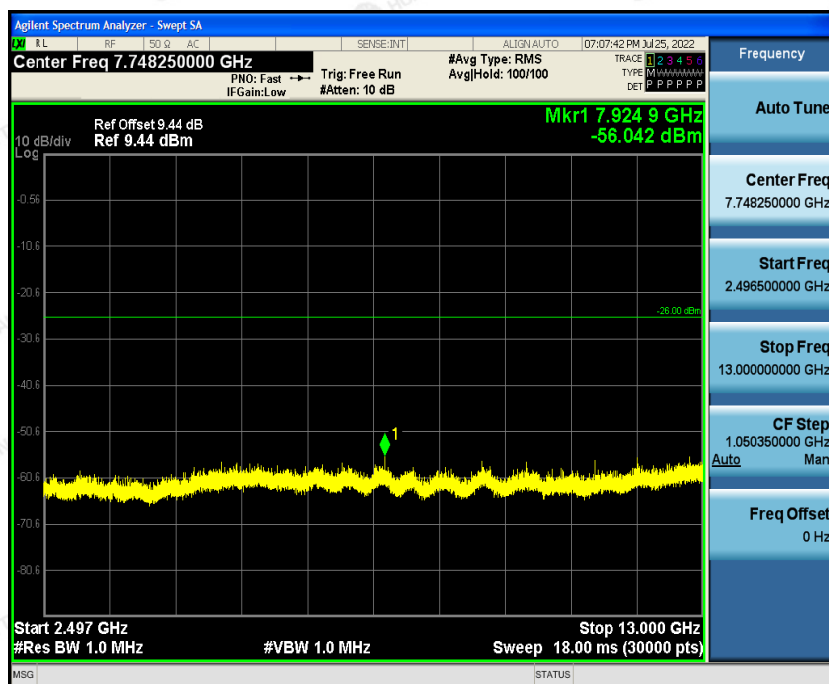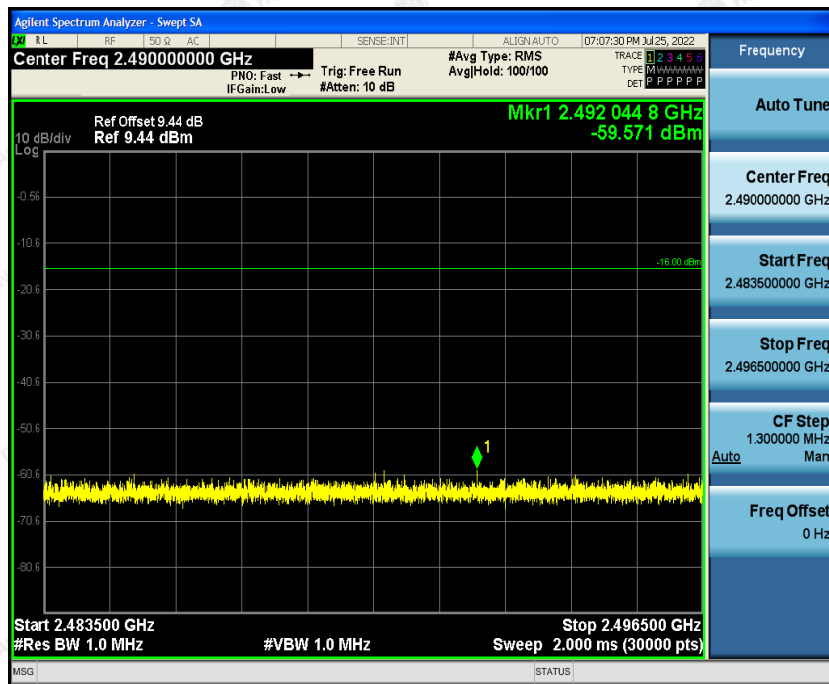





Pi / 4DQPSK TX Mode 2441MHz

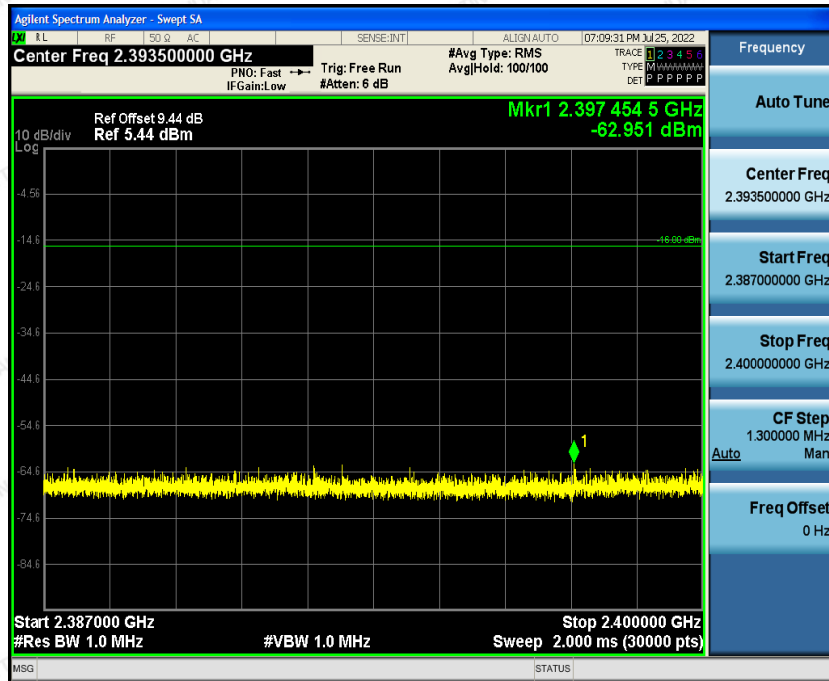
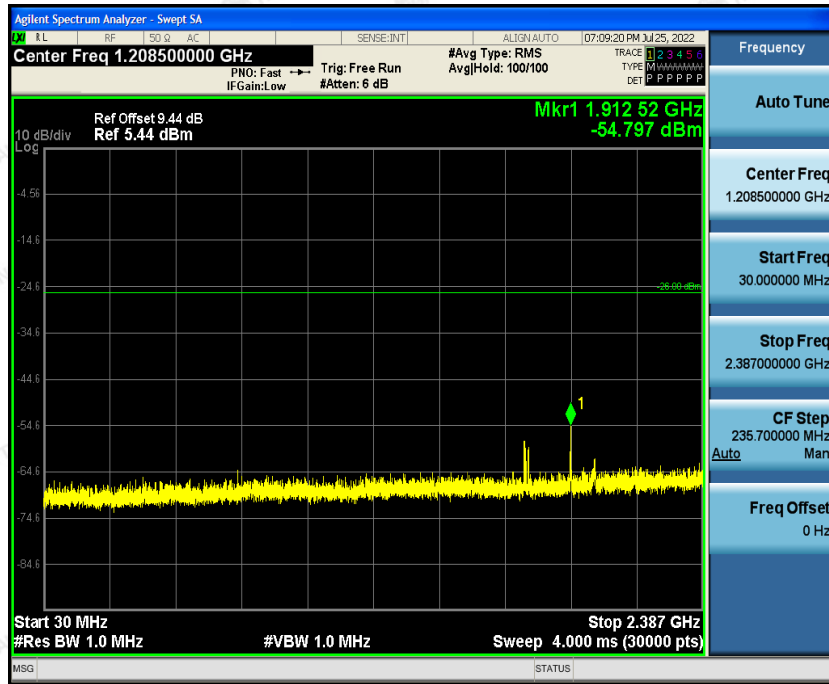


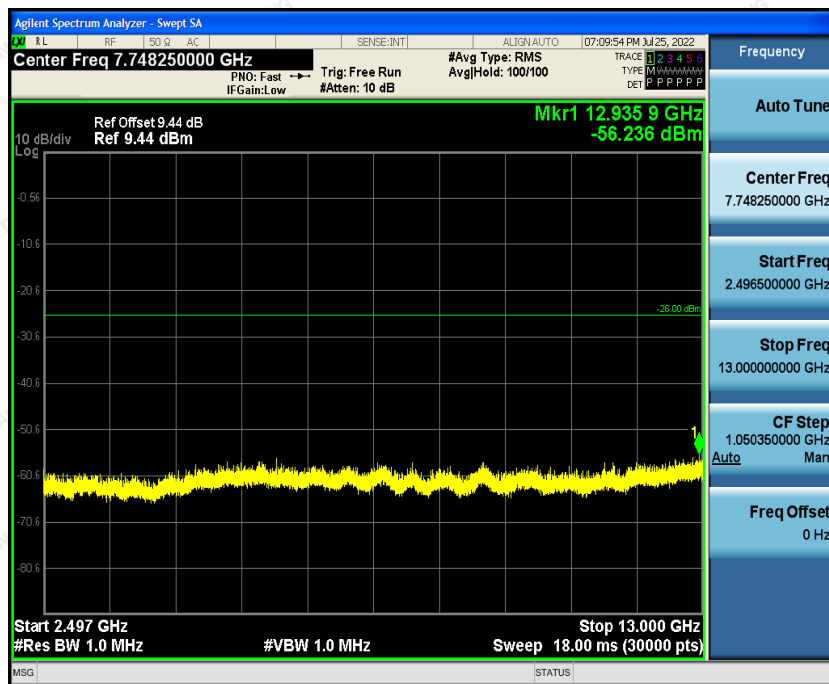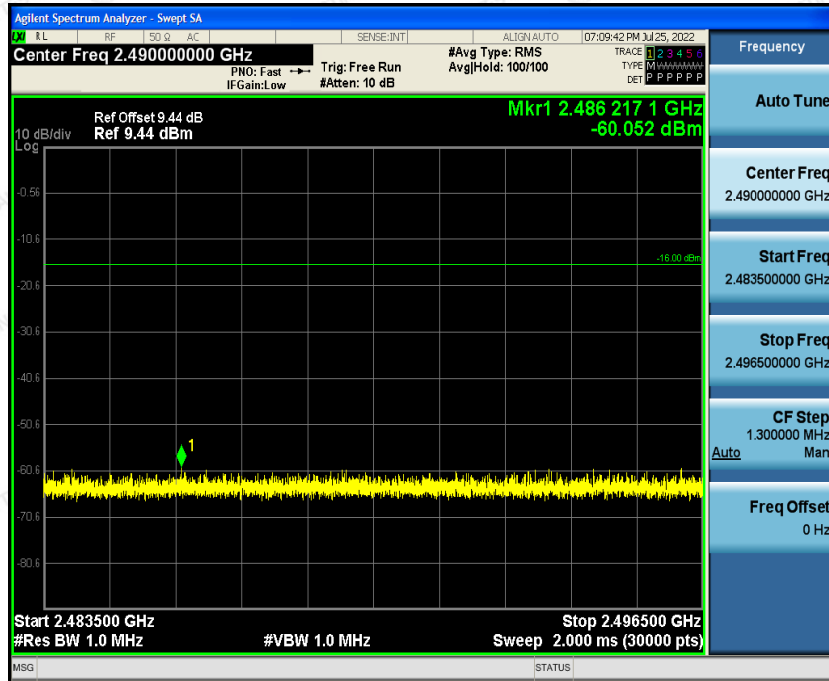





Pi / 4DQPSK TX Mode 2480MHz

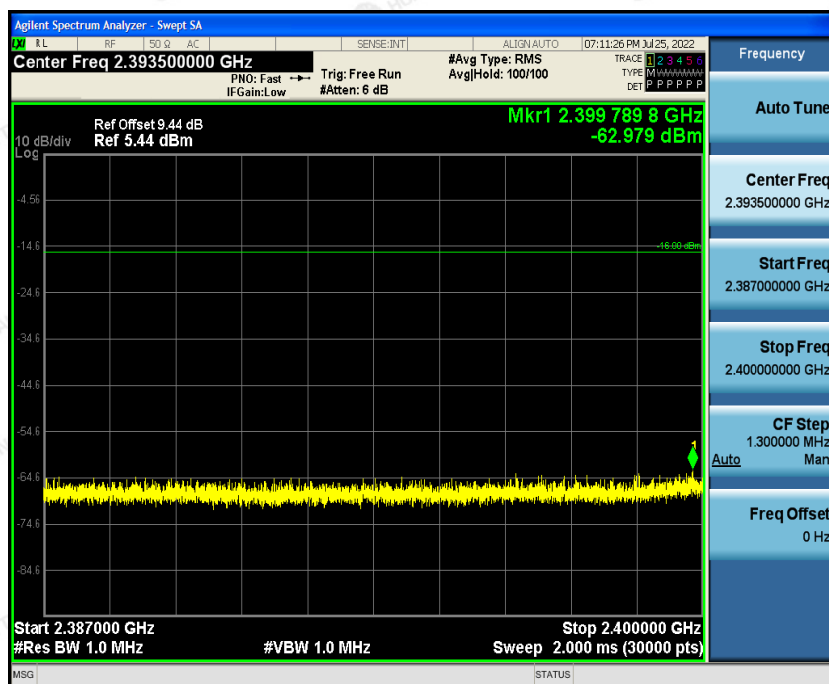
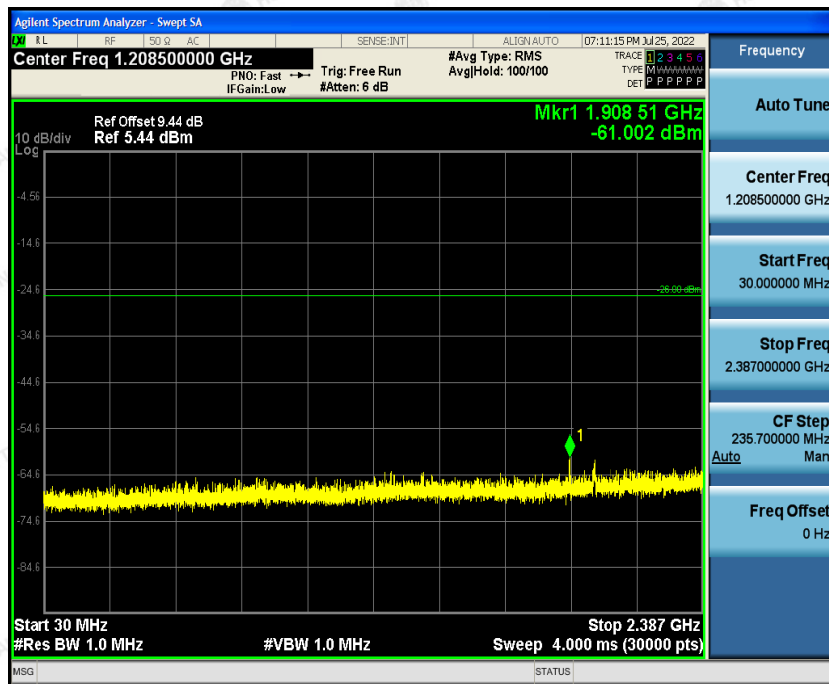


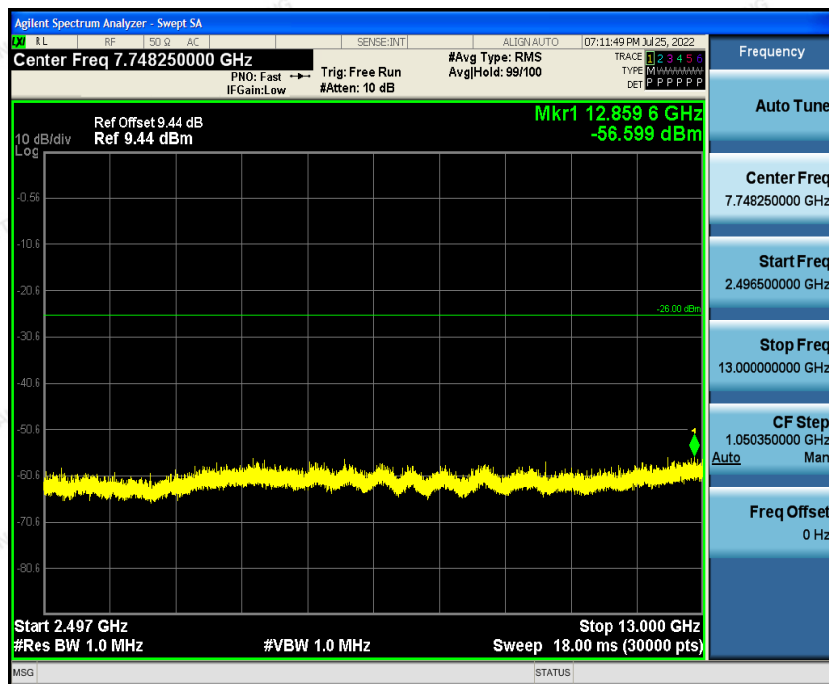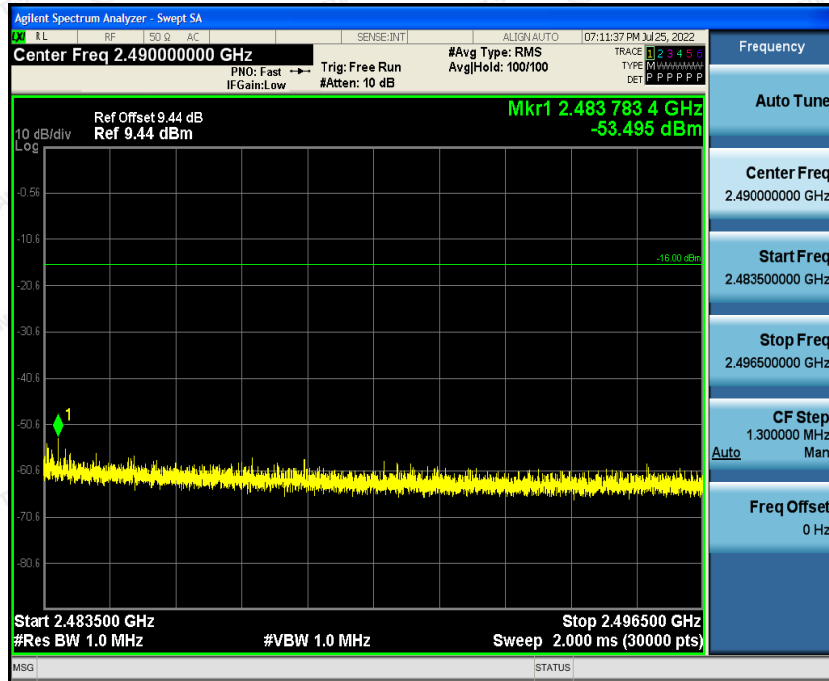





8-DPSK TX Mode 2402MHz

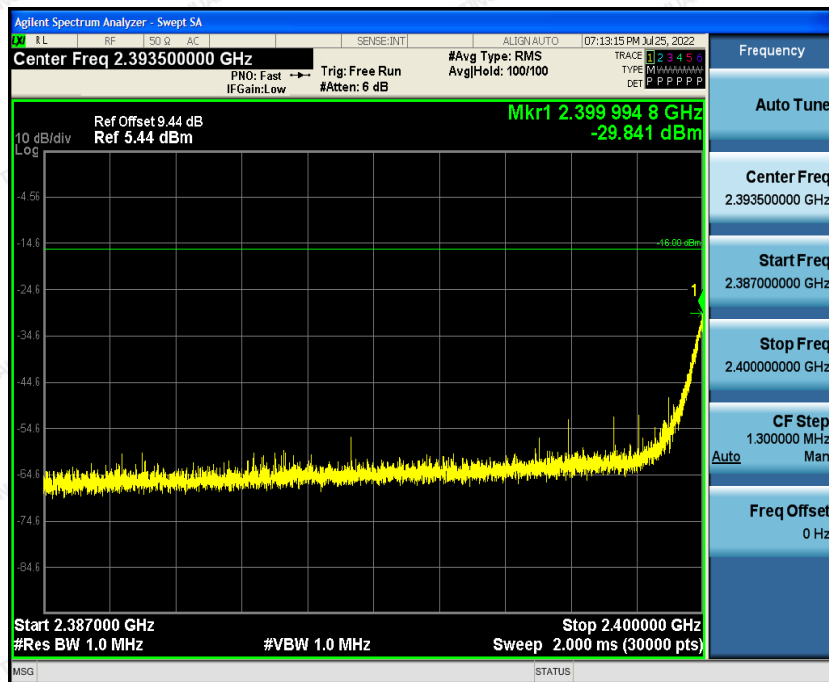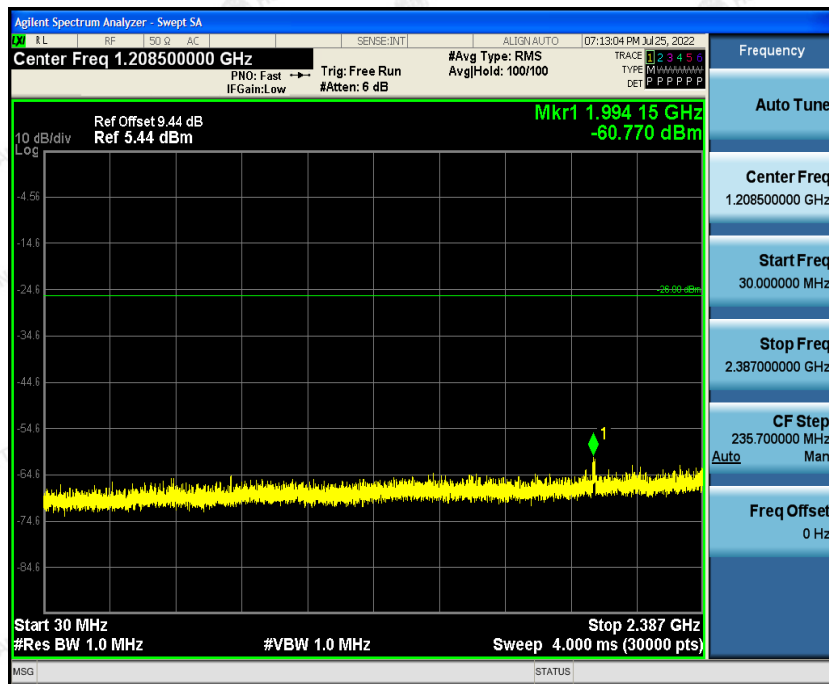

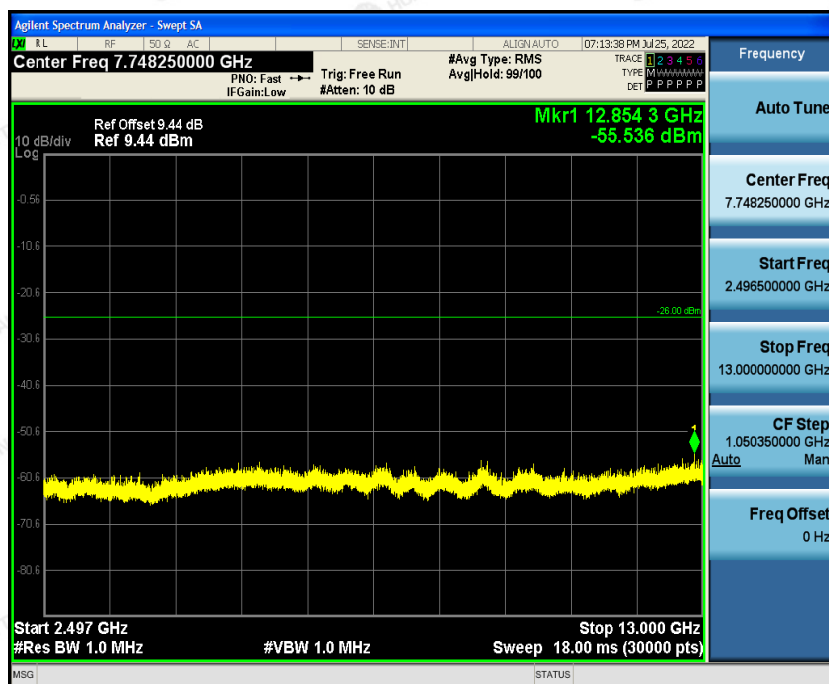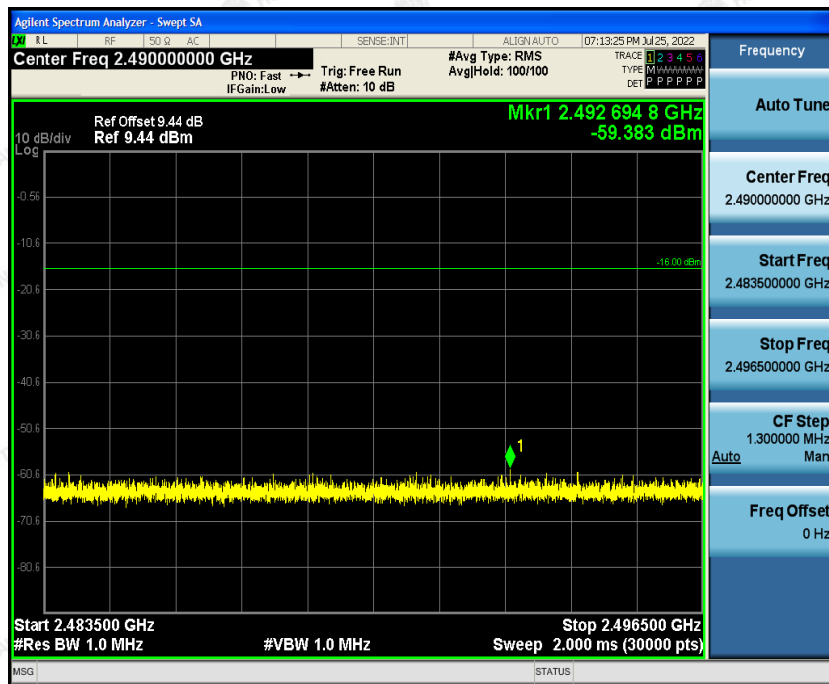





8-DPSK TX Mode 2441MHz

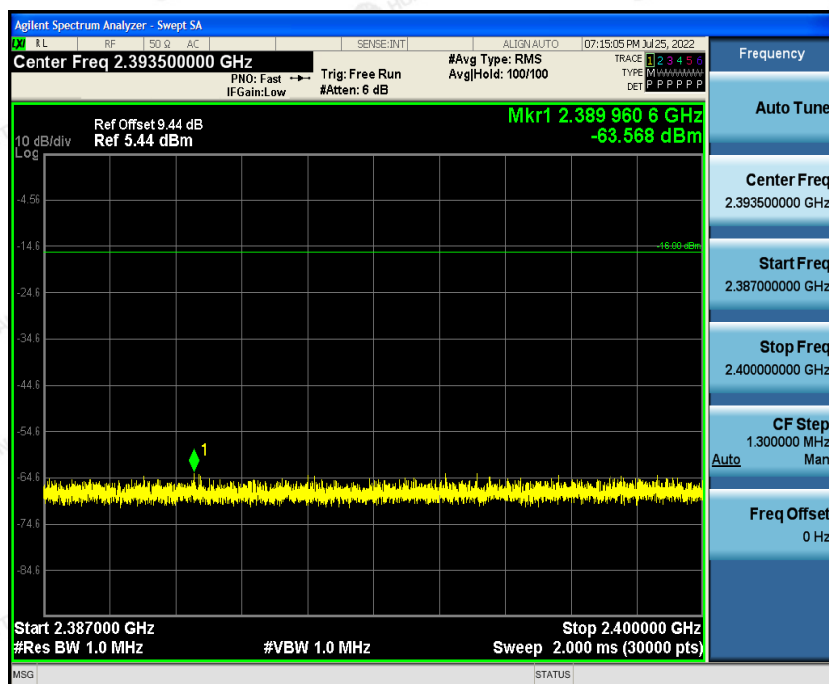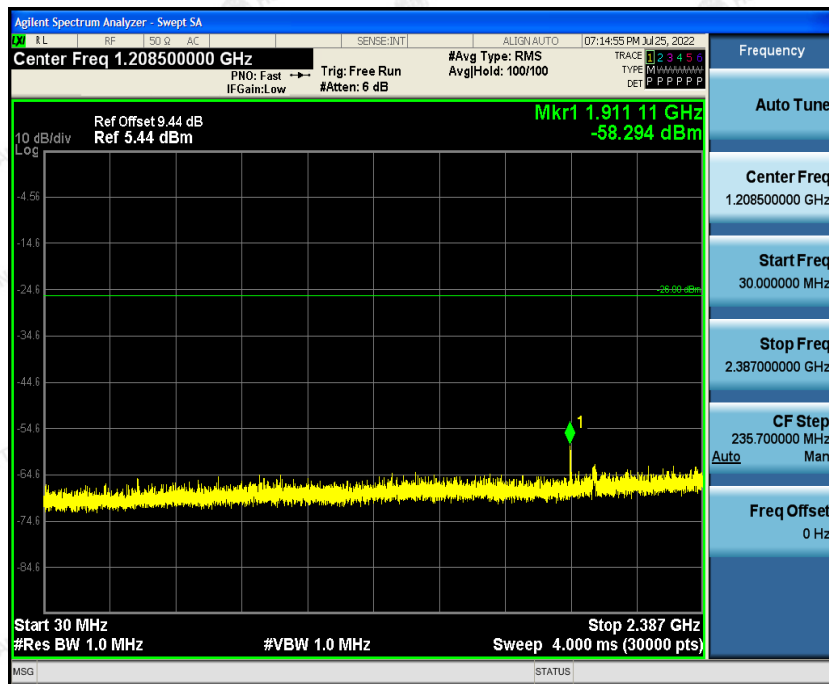

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com



Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

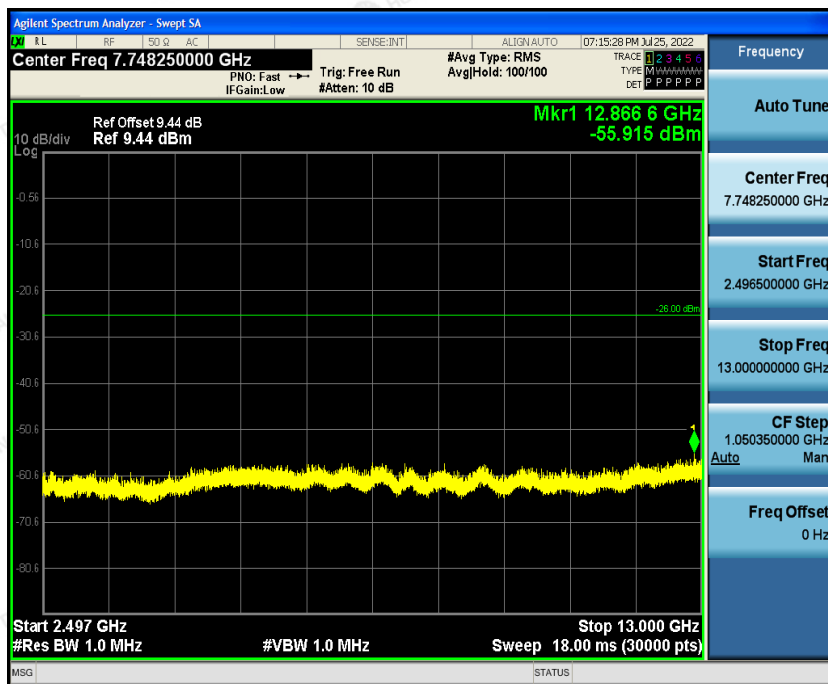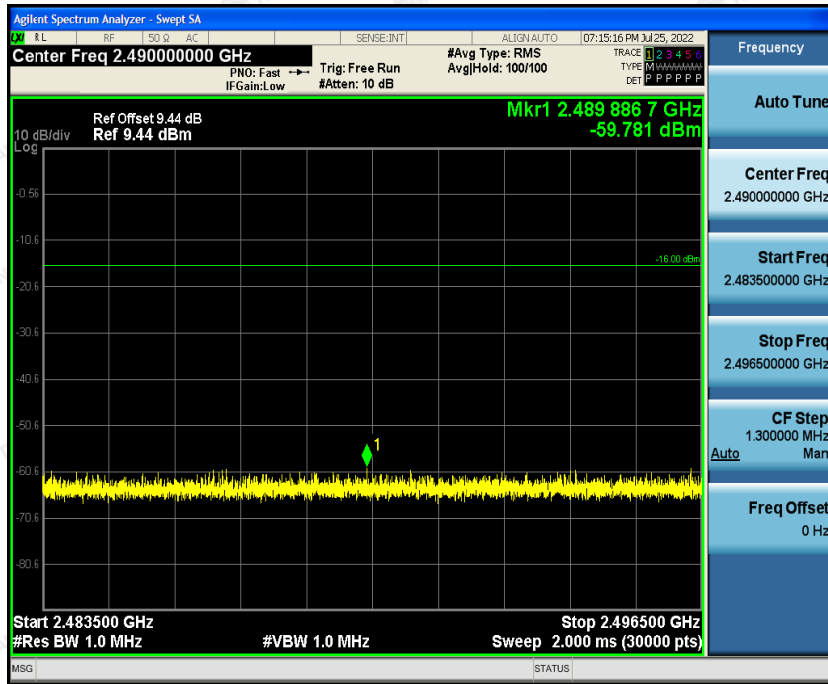



8-DPSK TX Mode 2480MHz

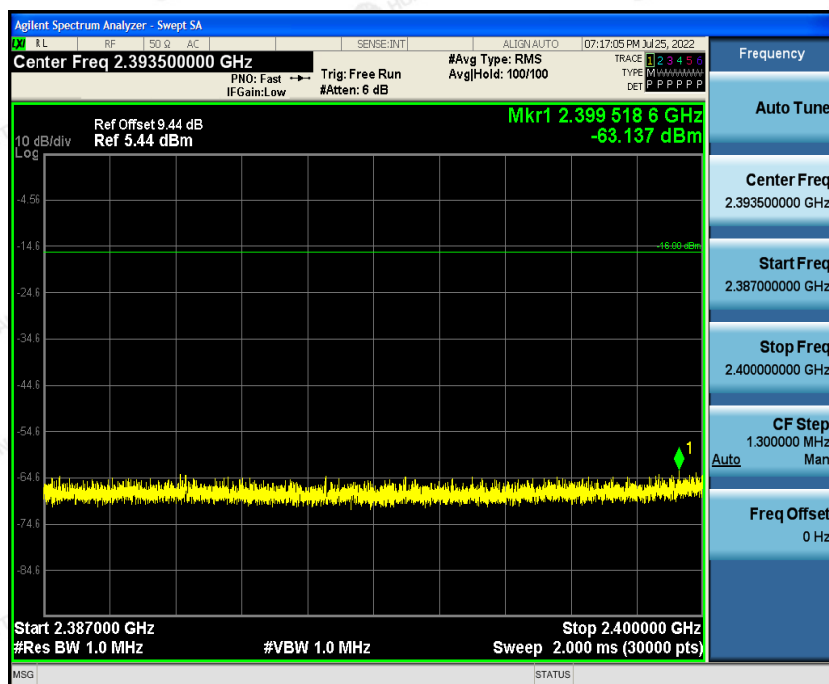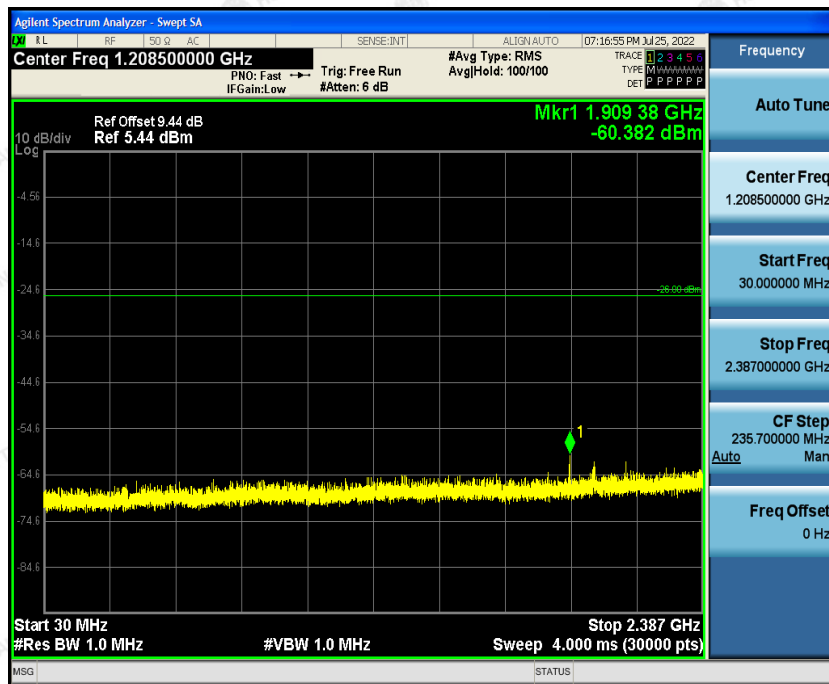

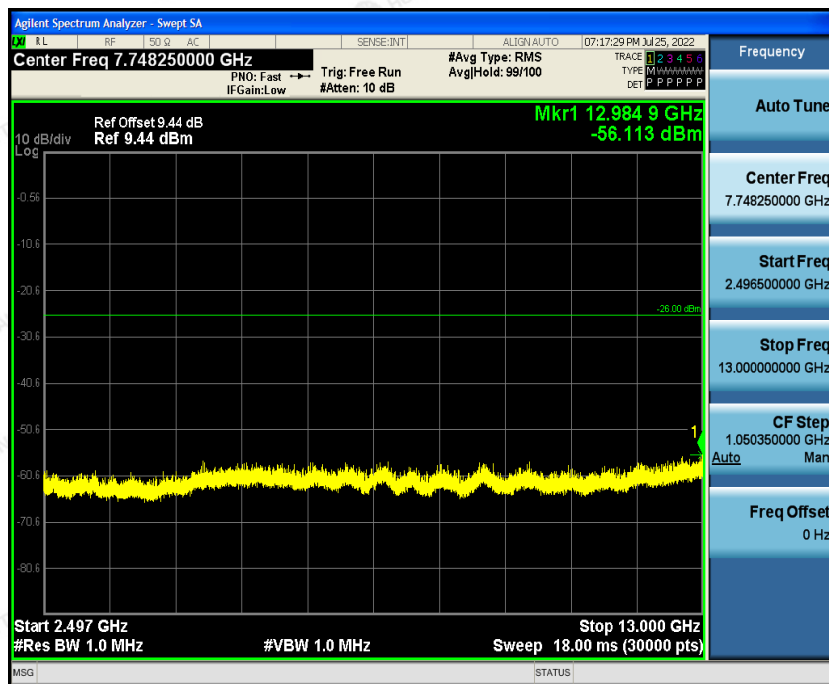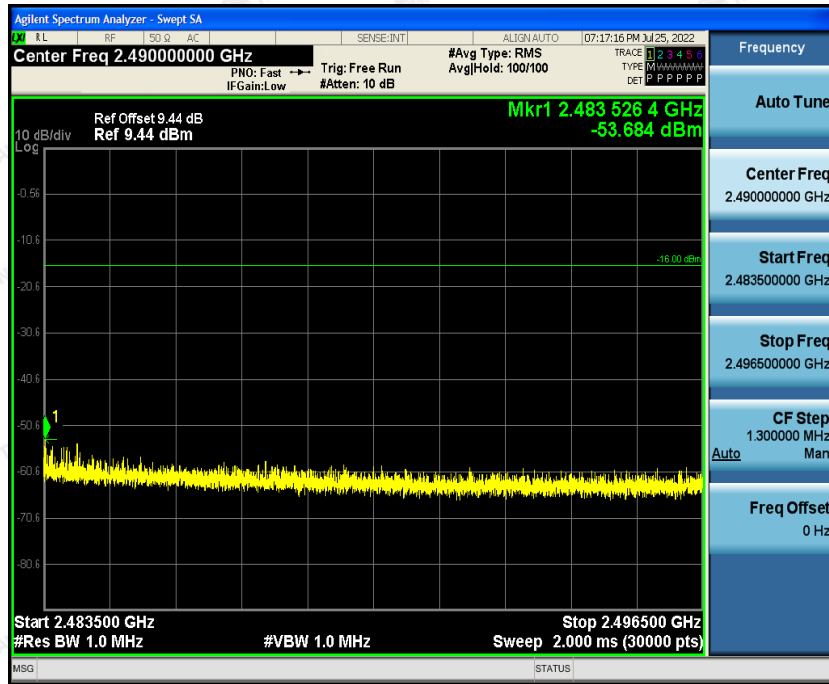



11. INTERFERENCE PREVENTION FUNCTION


11.1 Limit

| Item | Limits |
|---------------------|----------------|
| Identification code | ≥ 48 bits |

11.2 Measuring ID Code Software

| Item | Limits |
|-------------|----------|
| MAC IP List | MAC Scan |

11.3 Test Setup

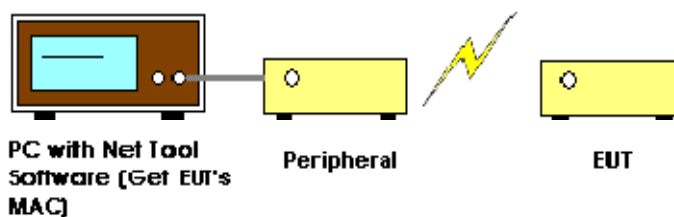

11.4 Test Procedure

- (1) In the case that the EUT has the function of automatically transmitting the identification code:
 - a. Transmit the predetermined identification codes from EUT.
 - b. Check the transmitted identification codes with the demodulator.
- (2) In the case of receiving the identification code:
 - a. Transmit the predetermined identification codes from the counterpart.
 - b. Check if communication is normal.
 - c. Transmit the signals other than predetermined ID codes from the counterpart.
 - d. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

11.5 Test Result

| | | | |
|--------------|-------------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25 ⁰ C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |
| Test result: | CONFORM | | |




12. CARRIER SENSING FUNCTION

12.1 Limit

The device shall not transmit radio wave when receiving 100Mw/m.

12.2 Test Setup

❖ Measurement System Diagram

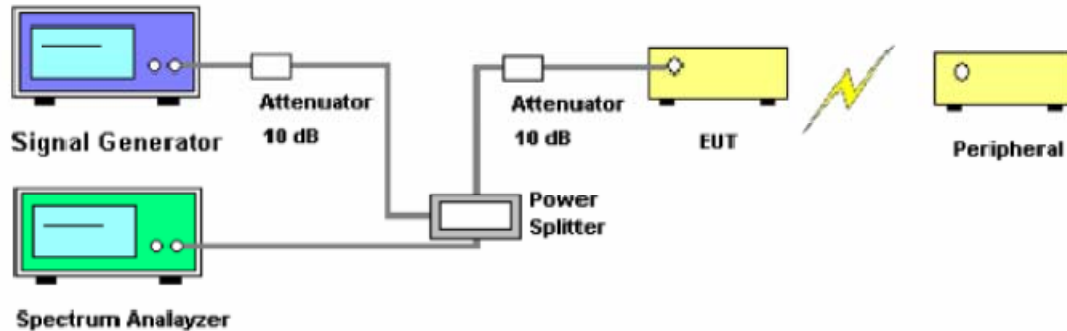

❖ Conditions of Application Equipment (EUT)

- The EUT state shall be “normal mode link with wireless router”.

12.3 Test Procedure

- (1) SG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SG and power level is $(on\ 22.79+G-20*\log(f)dBm)$ (G is the antenna gain, f is the test frequency).
- (2) Turn off the RF signal of the SG.
- (3) EUT have transmitted the maximum modulation signal and fixed channelize.
- (4) Setting of SA :RBW/VBW=1MHz/1MHz, Span=50MHz, Sweep time=auto, Sweep mode=continuous, Detect mode=positive peak.
- (5) SG RF signal on.
- (6) EUT shall be stop the transmitted any signal and SG RF signal off, the EUT will be continuous.

12.4 Test Result

| | | | |
|--------------|--|--------------|---|
| EUT : | Wireless card | Test Date: | / |
| Temperature: | 25°C | Tested by: | / |
| Humidity: | 55 % RH | Test Voltage | / |
| Test result: | Not applicable other than OFDM modulation. | | |




13. SECONDARY RADIATED EMISSIONS

13.1 Limit

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4 nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit.

13.2 Test Setup

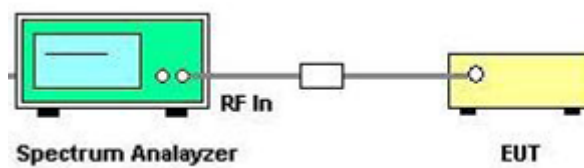



13.3 Test Procedure

- (1) Configure EUT and assistant system according to clause 2.2 and 14.2.
- (2) Set EUT work in carrier Rx mode as described in clause 2.2.
- (3) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:
For below 1G:
Resolution BW: 100KHz.
Video BW: 100KHz.
Detector: Peak.
Trace Mode: Max Hold.
For above 1G:
Resolution BW: 1MHz.
Video BW: 1MHz.
Detector: Peak.
Trace Mode: Max Hold.
- (4) When the trace is complete, measure the Secondary Radiated Emissions with spectrum analyzer's bandwidth measure function.



13.4 Test Result

| | | | |
|--|---------------|--------------|----------------|
| EUT : | Wireless card | Test Date: | Jul. 25, 2022 |
| Temperature: | 25°C | Tested by: | Sliver Wan |
| Humidity: | 55 % RH | Test Voltage | Normal Voltage |
| Note: The worst test channel of all channels was showed as the follow. | | | |

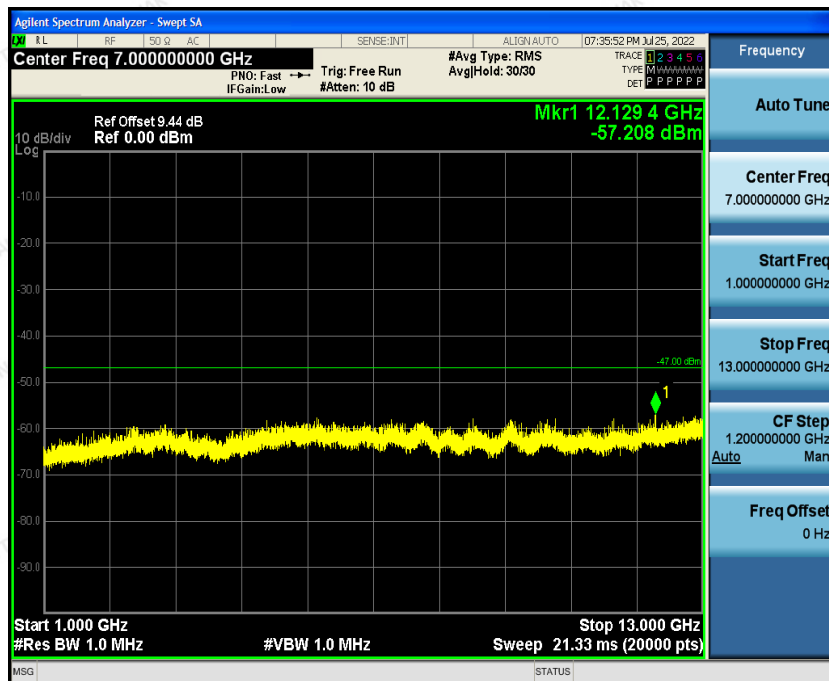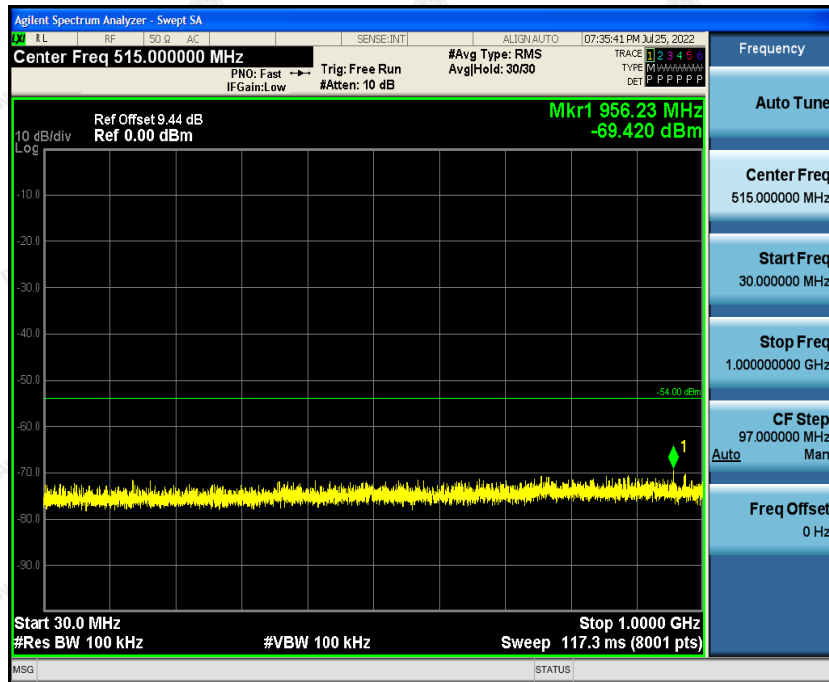



14. PHOTOGRAPH OF TEST



-----End of report-----