



JAPAN MIC

TEST REPORT

For

ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China (201203)

Tested Model: ESP32-PICO-KIT

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: WIFI & Bluetooth Development Board
Test Engineer: Stone Zhang	<i>Stone Zhang</i>
Report Number: RSHD181219002-24D	
Report Date: 2018-12-28	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	.3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
OBJECTIVE3
RELATED SUBMITTAL(S)/GRANT(S).....	.3
TEST METHODOLOGY3
TEST FACILITY3
EUT TEST CONFIGURATION.....	.4
DESCRIPTION OF TEST CONFIGURATION4
EUT EXERCISE SOFTWARE4
EQUIPMENT MODIFICATIONS4
SUPPORT EQUIPMENT LIST AND DETAILS4
EXTERNAL I/O CABLE.....	.4
CONFIGURATION OF TEST SETUP5
SUMMARY OF TEST RESULTS6
TEST EQUIPMENT LIST7
FREQUENCY ERROR8
LIMIT8
TEST PROCEDURE8
TEST DATA8
OCCUPIED BANDWIDTH11
LIMIT11
TEST PROCEDURE11
TEST DATA11
TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY14
LIMIT14
TEST PROCEDURE14
TEST DATA15
ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE.....	.24
LIMIT24
TEST PROCEDURE24
TEST DATA25
RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY28
LIMIT28
TEST PROCEDURE28
MEASUREMENT RESULT29
INTERFERENCE PREVENTION FUNCTION.....	.33
REQUIREMENT33
TEST PROCEDURE33
TEST DATA33
CONSTRUCTION PROTECTION CONFIRMATION34
LIMIT34
CONFIRMATION METHOD.....	.34

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

Applicant	ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD
Tested Model	ESP32-PICO-KIT
Product Type	WIFI & Bluetooth Development Board
Dimension	52 mm (L)*20.3 mm (W)*10 mm(H)
Power Supply	DC 3.3V

*All measurement and test data in this report was gathered from production sample serial number: 20181219002.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-12-19.

Objective

The objective of the manufacturer is to demonstrate compliance with Radio Law of Japan item 19 of Article 2 Paragraph 1.

Related Submittal(s)/Grant(s)

Item 19 of Article 2 Paragraph 1 for BT3.0
Item 19 of Article 2 Paragraph 1 for Wi-Fi 2412-2472MHz
Item 19-2 of Article 2, Paragraph 1 for Wi-Fi 2484MHz

Test Methodology

All measurements contained in this report were conducted with technical regulations of the Radio Law of Japan.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

EUT TEST CONFIGURATION

Description of Test Configuration

Channel list for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
...	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

EUT Exercise Software

RF test tool: ESP_RF_test_tool_v1.1.0

Power level setting: 8

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
BEST	DC Power Supply	PS-1502D+	DC001

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Notebook
RF Cable	0.2	EUT	Attenuator
Power Cable	1.0	EUT	DC Power Supply

Configuration of Test Setup

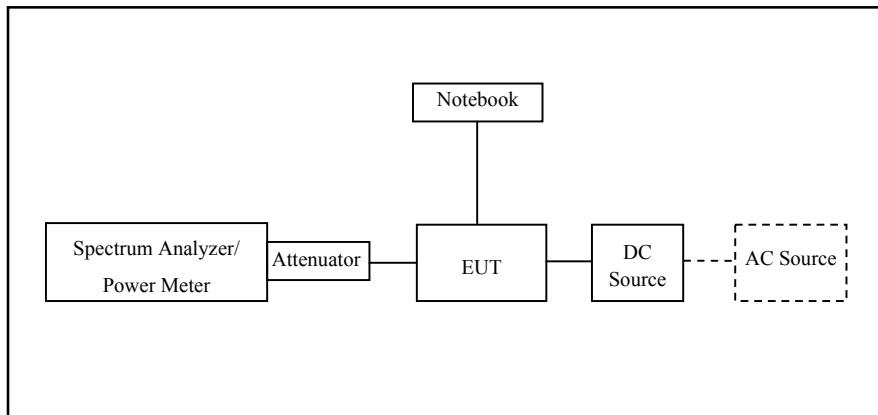

SUMMARY OF TEST RESULTS

MIC Notice No.88 Appendix No.43 Article 2, Paragraph 1, Item 19 Rules Section	Description of Test	Result
3	Frequency Error	Compliance
4	Occupied Bandwidth	Compliance
5	Transmitter Spurious Emission and Unwanted Emission Intensity	Compliance
6	Antenna Output Power and Output Power Tolerance	Compliance
7	Receiver Spurious Emission and Unwanted Emission Intensity	Compliance
8	Transmission Antenna Gain	Not Applicable (See Note 1)
9	Transmission Radiation Angle Width	Not Applicable (See Note 1)
10	Carrier sense capability	Not Applicable (See Note 3)
11	Frequency Hopping Dwell Time	Not Applicable (See Note 2)
12	Interference prevention function	Compliance
Appendix	Construction Protection Confirmation	Compliance

Note:

1. This test item will not be applied to the transmission antenna which EIRP is less than 12.14dBm.
2. Testing is only required for FHSS system devices;
3. The test only required for bandwidth more than 26MHz and less than 38MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-12	2019-11-11
Agilent	Power Meter	E4419B	MY41291878	2018-01-23	2019-01-22
Narda	Attenuator	10dB	010	2018-01-10	2019-01-09
BEST	DC Power Supply	PS-1502D+	DC001	2018-10-10	2019-10-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

FREQUENCY ERROR

Limit

The Tolerance of frequency should be $\pm 50\text{ppm}$.

Test Procedure


Set the EUT to the measurement frequency without modulation.

Setting of SA is following as: RB: 1 kHz / VB: 30 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold.
Record the peak spot frequency.

If the EUT can't set at un-modulation mode.

Setting of SA is following as: RB: 30 kHz / VB: 30 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold.

Record the peak spot frequency, measure the 10dBc center frequency

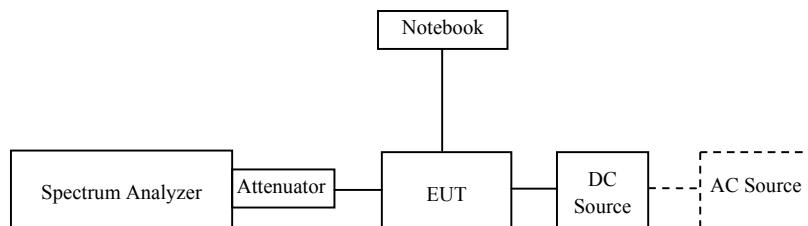

Test Data

Environmental Conditions

Temperature:	22.4 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa


The testing was performed by Stone Zhang on 2018-12-24.



Test Result: Compliant

Test Mode: Transmitting

Frequency (MHz)	Voltage (V _{DC})	Measure Frequency (MHz)	Frequency Tolerance (ppm)	Limit (ppm)
2402	2.97	2401.96572	-14.27	± 50
	3.30	2401.96483	-14.64	
	3.63	2401.96118	-16.16	
2440	2.97	2439.96851	-13.11	± 50
	3.30	2439.96483	-14.64	
	3.63	2439.96227	-15.71	
2480	2.97	2479.96776	-13.00	± 50
	3.30	2479.96483	-14.18	
	3.63	2479.96324	-14.82	

Low Channel

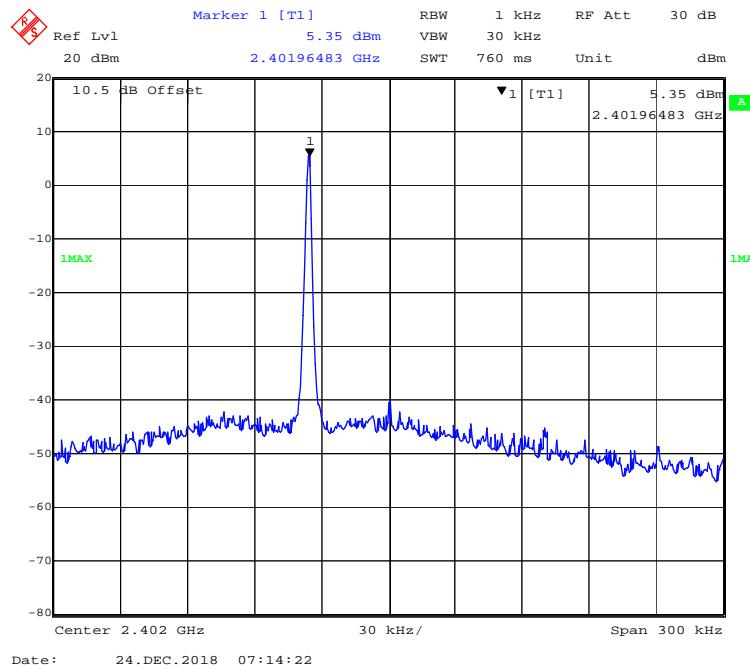

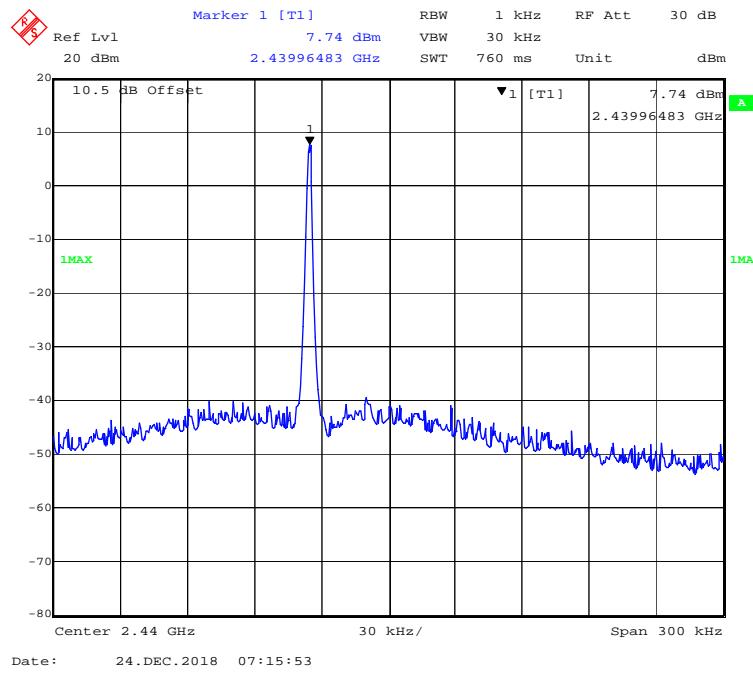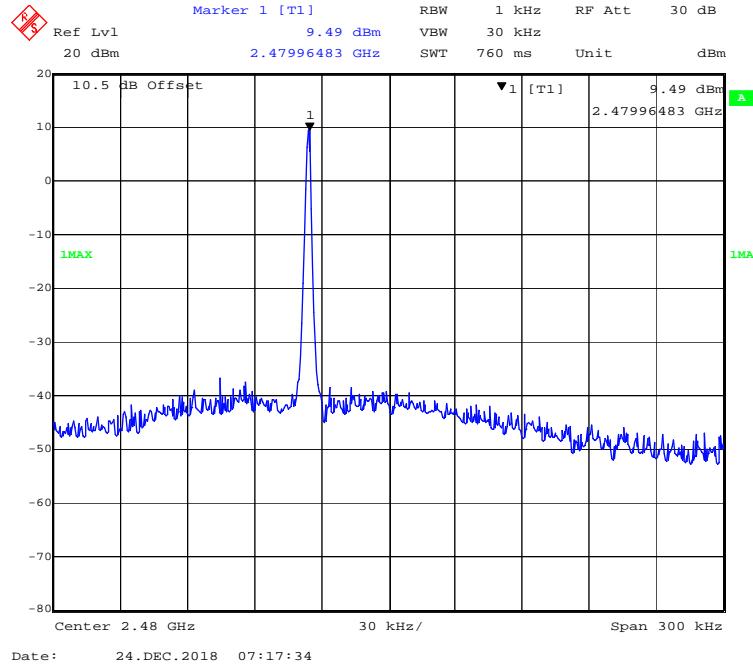Middle Channel**High Channel**


OCCUPIED BANDWIDTH

Limit

- Occupied bandwidth: FH \leq 83.5 MHz; OFDM, DS \leq 26 MHz; Others \leq 26 MHz

Test Procedure

- Setting of SA is following as: RB: 30 kHz / VB: 30 kHz / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak / Trace mode: Max hold
- EUT have transmitted the maximum modulation signal and fixed channelize. SA set to 99% of occupied bandwidth to measure occupied bandwidth.

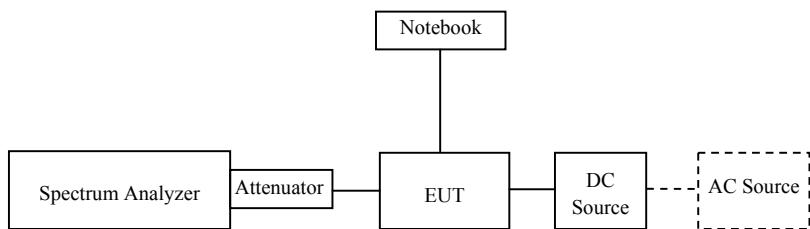

Test Data

Environmental Conditions

Temperature:	22.4-23.0 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.0-101.2kPa


The testing was performed by Stone Zhang from 2018-12-22 to 2018-12-24.


Test Result: Compliant

Test Mode: Transmitting

Frequency	2402 MHz			2440 MHz			2480 MHz			Limit
Voltage (Vpc)	2.97	3.30	3.63	2.97	3.30	3.63	2.97	3.30	3.63	\leq 26MHz
Occupied Bandwidth (MHz)	1.0600	1.0400	1.0100	1.0460	1.0340	1.0220	1.0462	1.0341	1.0284	

Please refer to the plots for normal voltage test.

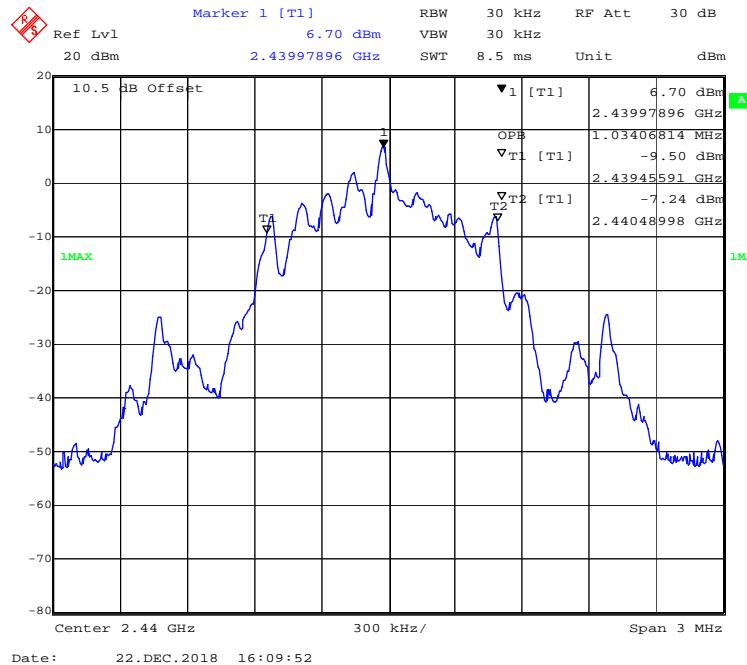Occupied Bandwidth:**Low Channel****Middle Channel**

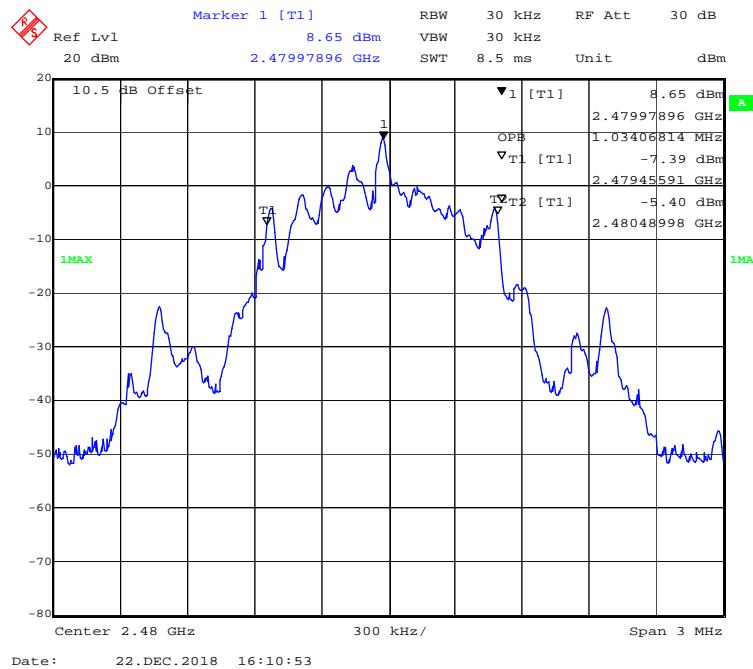High Channel


TRANSMITTER SPURIOUS EMISSION STRENGTH AND UNWANTED EMISSION INTENSITY

Limit

- $30\text{MHz} \leq f \leq 1\text{GHz}$: $0.25 \mu\text{W}/100\text{kHz}$
- $1\text{GHz} < f < 2387 \text{ MHz}$; $2496.5\text{MHz} < f \leq 12500\text{MHz}$: $\leq 2.5\mu\text{W}/\text{MHz}$
- $2387\text{MHz} \leq f \leq 2400 \text{ MHz}$; $2483.5 \text{ MHz} < f \leq 2496.5 \text{ MHz}$: $\leq 25\mu\text{W}/\text{MHz}$

Test Procedure

❖ Measurement System Diagram

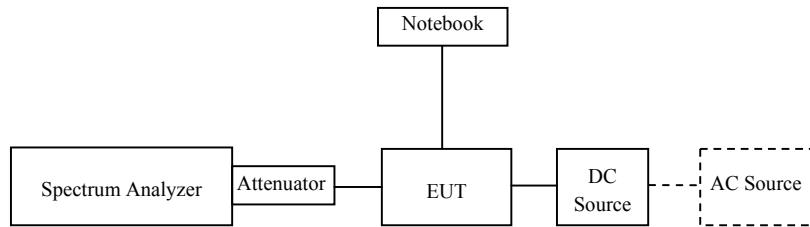

❖ Conditions of Application Equipment (EUT)

- The modulation state shall be in continuously transmitting mode.

❖ Spectrum Analyzer Conditions

- Setting of SA start 30MHz and stop frequency 1GHz, RB: 100kHz/VB: 100kHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $0.25\mu\text{W}$.
- Setting of SA start 1GHz and stop frequency 2387MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $2.5\mu\text{W}$.
- Setting of SA start 2387MHz and stop frequency 2400MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $25\mu\text{W}$.
- Setting of SA start 2483.5MHz and stop frequency 2496.5MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $25\mu\text{W}$.
- Setting of SA start 2496.5MHz and stop frequency 12500MHz, RB: 1MHz/VB: 1MHz, Sweep time: Auto. Sweep mode: continuous sweep .Detect mode: Positive peak/Trace mode: max hold. Then to mark peak. reading value + cable loss shall be less than $2.5\mu\text{W}$.

Test Data

Environmental Conditions

Temperature:	22.4 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Stone Zhang on 2018-12-22.

Test Result: Compliant

Test Mode: Transmitting

Frequency band		2402 MHz			2440 MHz			2480 MHz			Limit
Voltage (V _{DC})		2.97	3.30	3.63	2.97	3.30	3.63	2.97	3.30	3.63	
Unwanted Emission Intensity	Band I (dBm/100kHz)	-48.60	-48.63	-48.50	-49.17	-48.54	-47.83	-47.43	-48.20	-48.36	-36dBm/100kHz (0.25 μW/100kHz)
	Band II (dBm/MHz)	-39.03	-38.11	-38.42	-39.10	-38.46	-38.45	-48.98	-48.90	-48.20	-26dBm/MHz (2.5 μW/MHz)
	Band III (dBm/MHz)	-19.11	-19.35	-18.66	-37.31	-38.28	-37.67	-46.66	-46.94	-47.07	-16dBm/MHz (25 μW/MHz)
	Band IV (dBm/MHz)	-37.61	-38.17	-39.03	-37.89	-38.51	-37.84	-31.30	-31.99	-32.67	-16dBm/MHz (25 μW/MHz)
	Band V (dBm/MHz)	-33.00	-33.84	-33.07	-33.93	-33.08	-32.95	-33.78	-33.83	-33.28	-26dBm/MHz (2.5 μW/MHz)

Note:

Band I: 30MHz~1000MHz

Band II: 1000MHz~2387MHz

Band III: 2387MHz~2400MHz


Band IV: 2483.5MHz~2496.5MHz

Band V: 2496.5MHz~12500MHz

Please refer to the plots for normal voltage test.


Low Channel

30MHz ~ 1000MHz


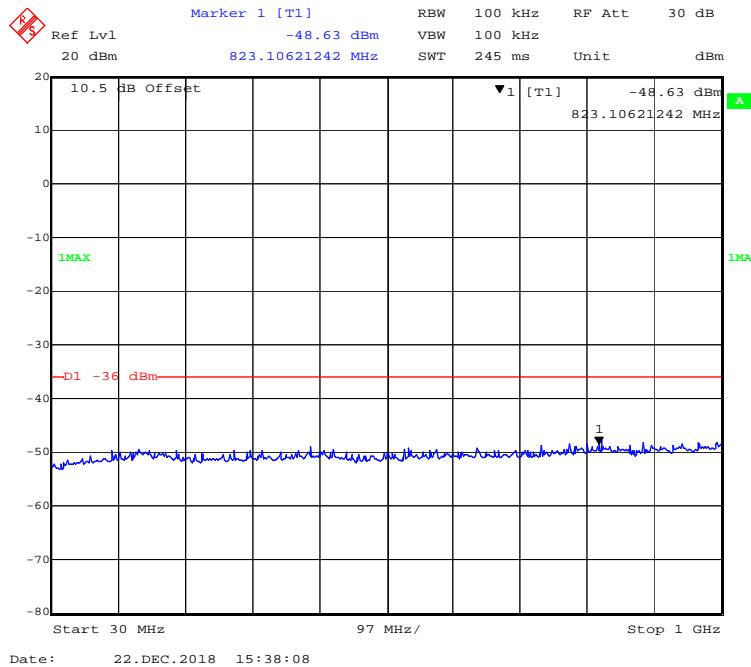




Date: 22.DEC.2018 15:38:08



1000MHz ~ 2387MHz

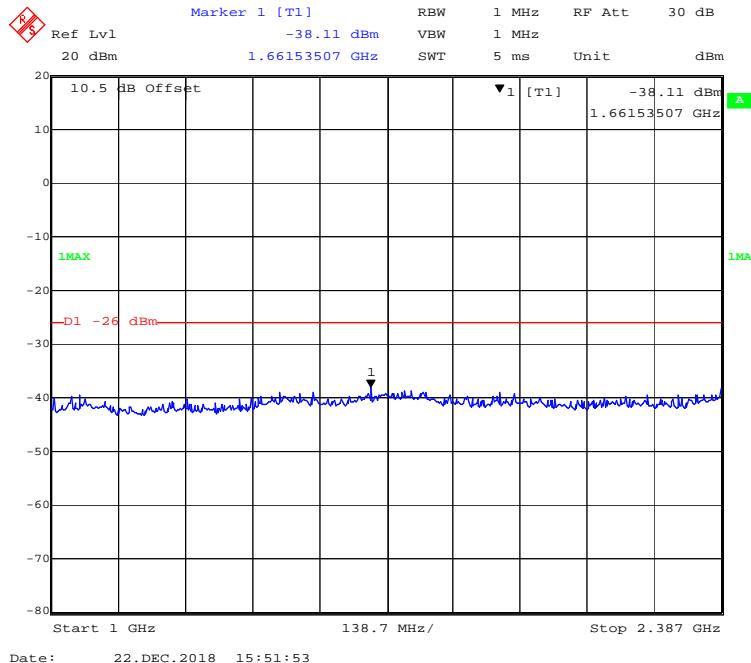


Date: 22.DEC.2018 15:51:53

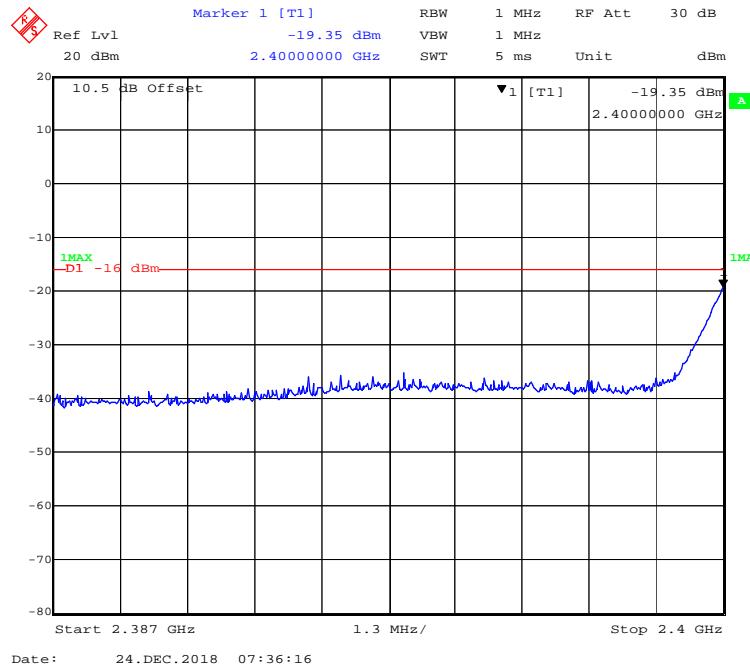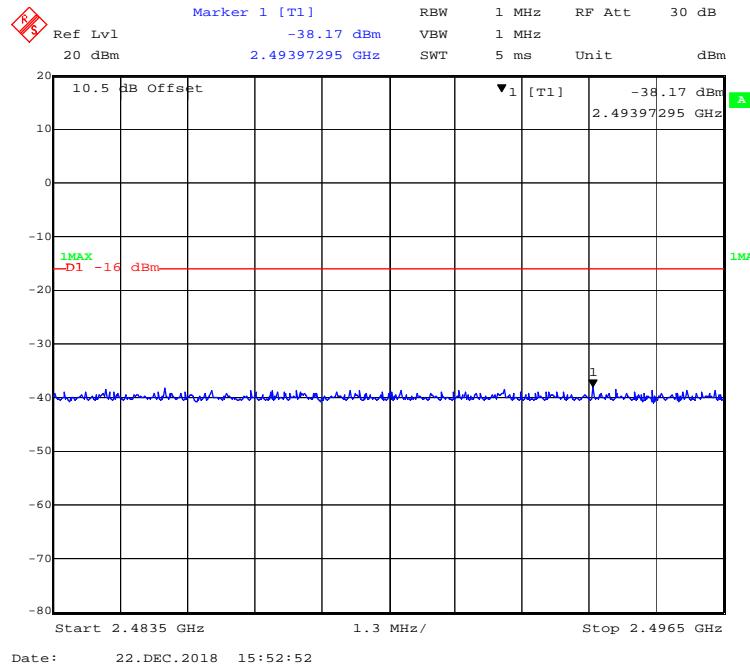2387MHz ~2400MHz**2483.5MHz ~2496.5MHz**

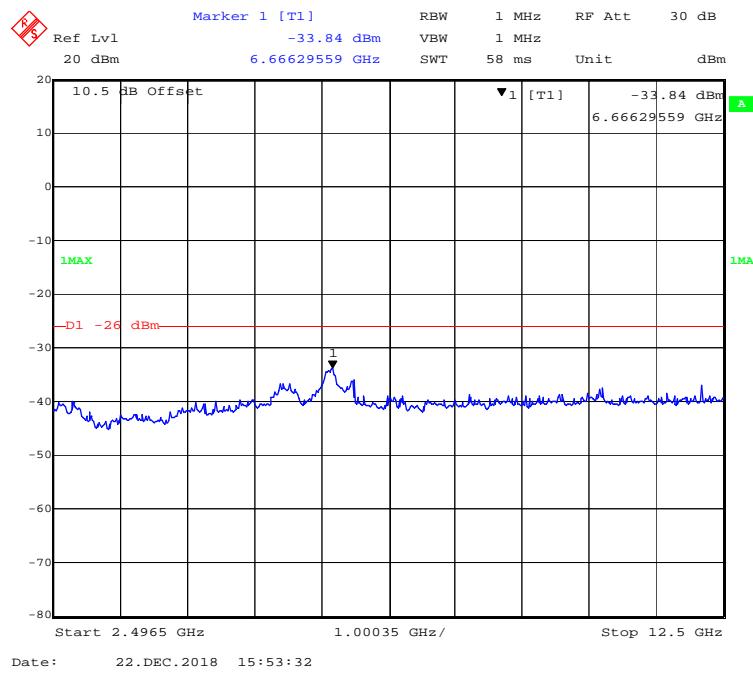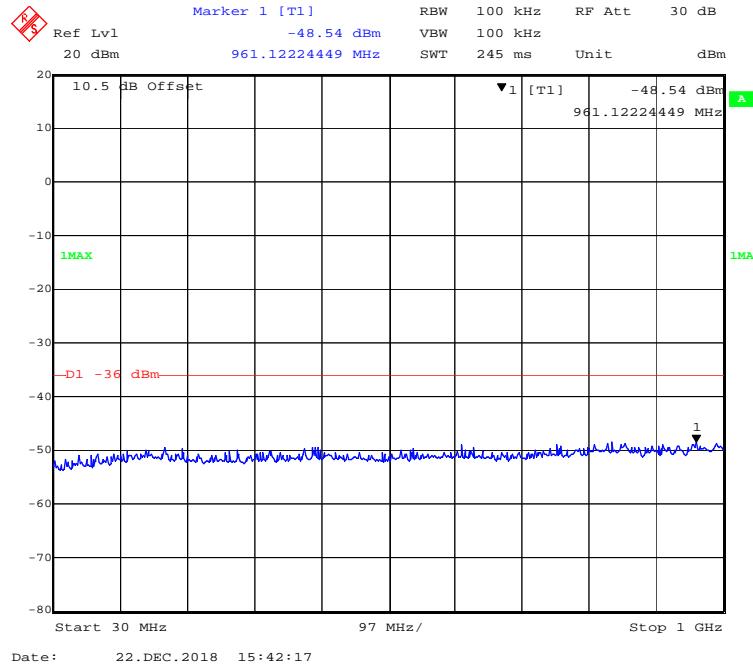
2496.5MHz~12500MHz**Middle Channel:*****30MHz~1000MHz***

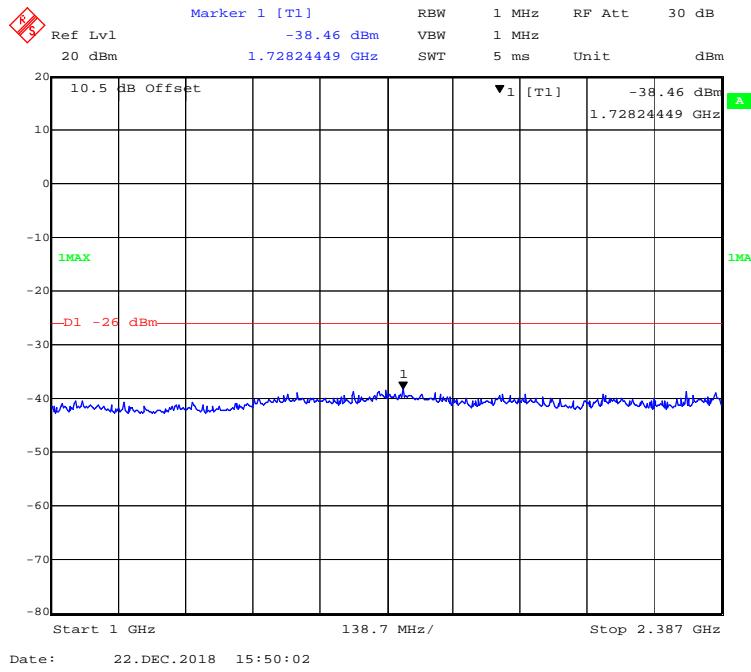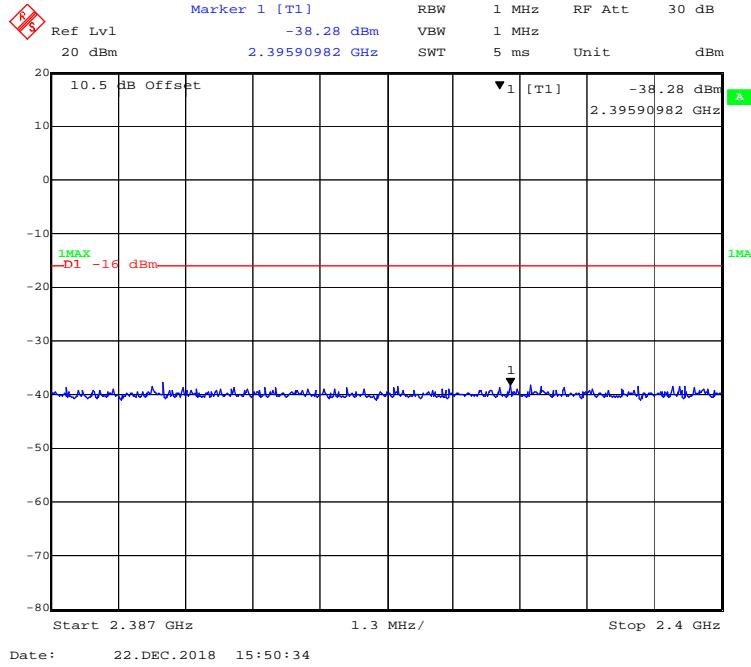1000MHz ~2387MHz*2387MHz ~2400MHz*

2483.5MHz ~ 2496.5MHz

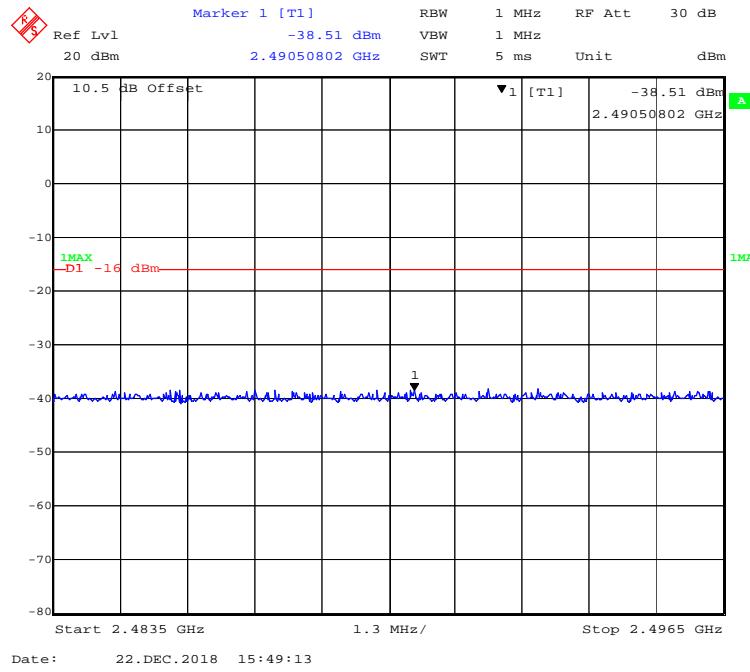


2496.5MHz ~ 12500MHz

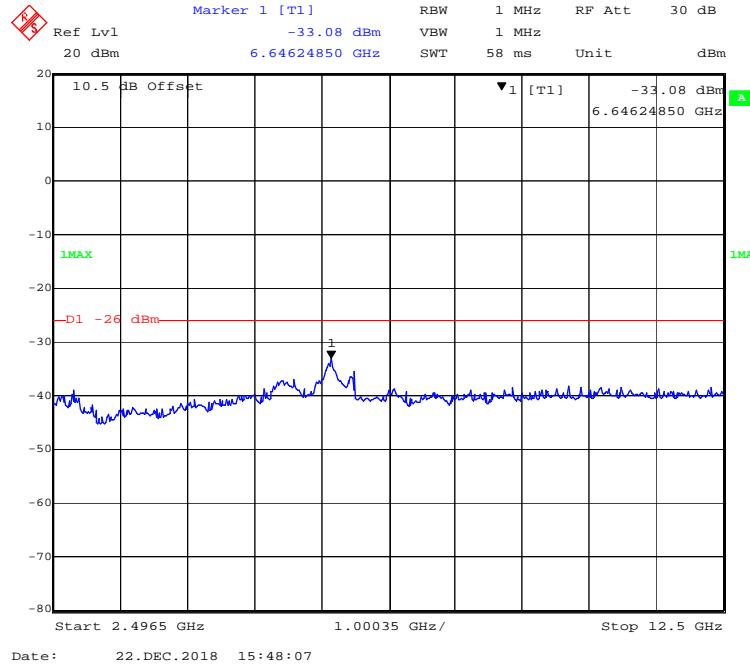


High Channel:


$30MHz \sim 1000MHz$

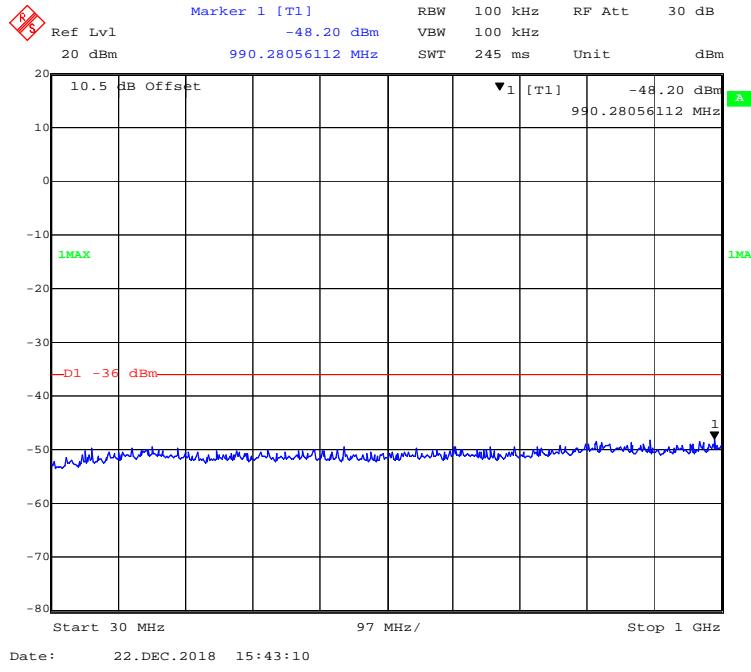


$1000MHz \sim 2387MHz$

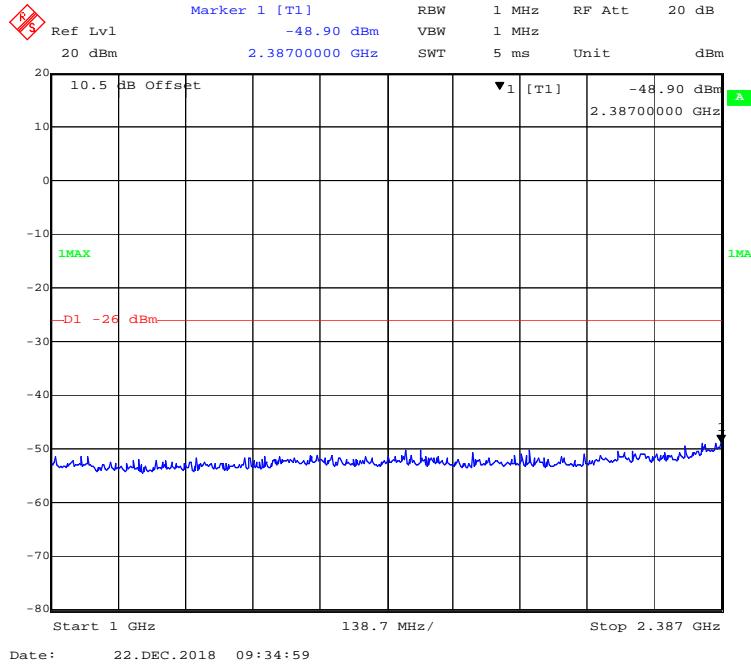


2387MHz ~ 2400MHz

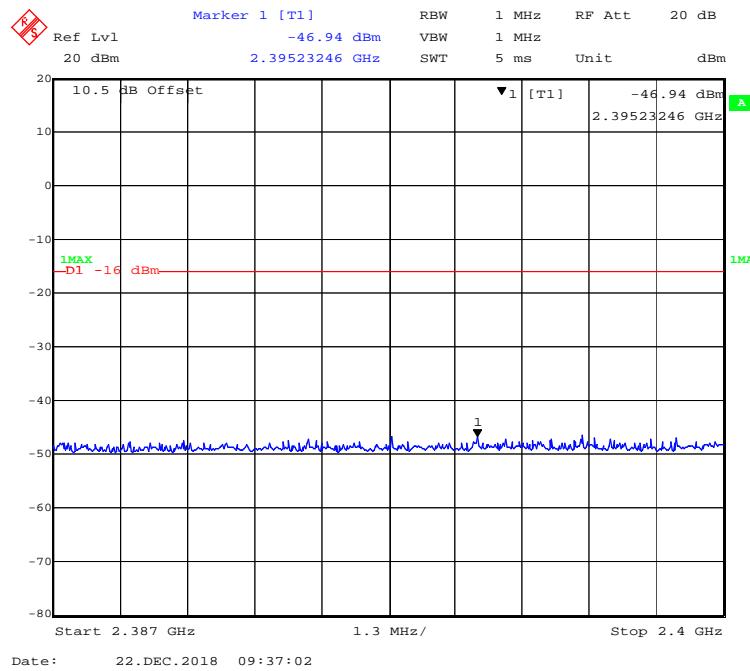

2483.5MHz ~ 2496.5MHz

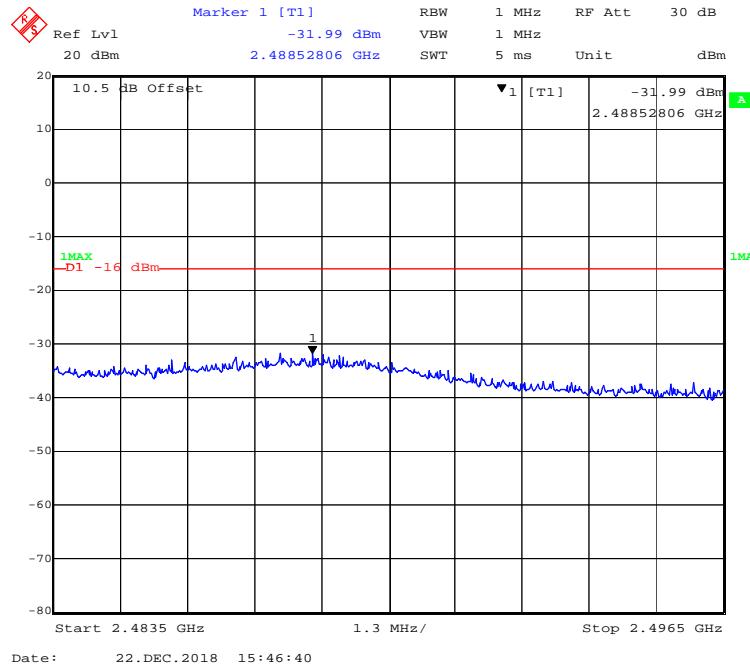

2496.5MHz~12500MHz

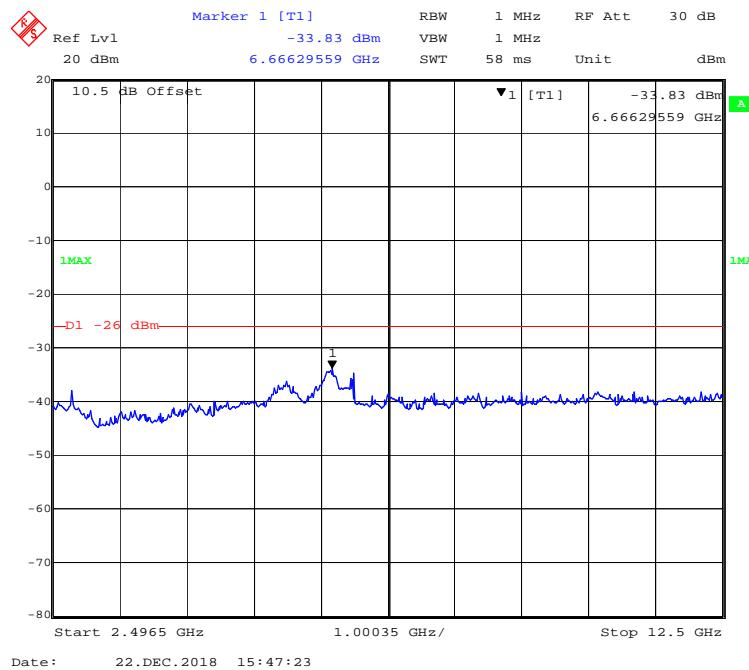

ANTENNA OUTPUT POWER AND ANTENNA POWER TOLERANCE

Limit

- $\leq 3 \text{ mW} / \text{MHz}$ (FHSS from 2402 - 2480 MHz)
- $\leq 10 \text{ mW/MHz}$ (OFDM, DSSS from 2400 - 2483.5 MHz)
- $\leq 10 \text{ mW}$ (other from 2400 - 2483.5 MHz)

The Output Power Tolerance must be within +20%, -80%.

Test Procedure


Step1; Measure the total power by Power Meter in a state of hopping mode or non-hopping mode (with Average Sensor).

Step2; If it's the burst wave, please measure the burst ratio. Then calculate the real total power by burst ratio.


Step3; Calculate the mean output power.

Test Setup Block diagram

Power:

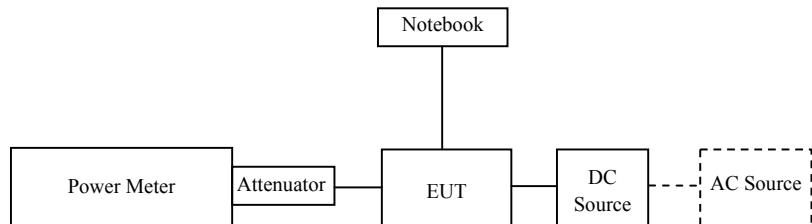

Duty Cycle:

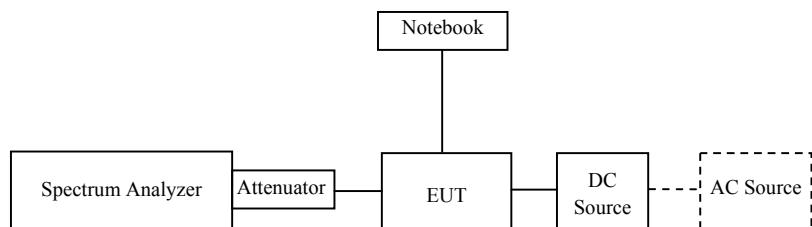

Test Data

Environmental Conditions

Temperature:	22.4-23.0 °C
Relative Humidity:	48-50 %
ATM Pressure:	101.0-101.2kPa

The testing was performed by Stone Zhang from 2018-12-22 to 2018-12-24.

Test Result: Compliant

Test Mode: Transmitting

Frequency	2402 MHz			2440 MHz			2480 MHz		
Voltage (V_{DC})	2.97	3.30	3.63	2.97	3.30	3.63	2.97	3.30	3.63
Power Meter Reading (dBm)	3.95	3.89	3.76	3.92	3.77	3.64	5.86	5.73	5.64
Burst Ratio (%)	84.35	85.66	86.13	85.42	86.39	87.36	84.29	85.59	86.13
Antenna Output Power (dBm)	4.69	4.56	4.41	4.60	4.41	4.23	6.60	6.41	6.29
EIRP (dBm)	8.69	8.56	8.41	8.60	8.41	8.23	10.60	10.41	10.29
Antenna Output Power (mW)	2.94	2.86	2.76	2.89	2.76	2.65	4.57	4.37	4.25
Declared Power (mW)	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
Antenna Output Power Tolerance (%)	-41.12	-42.82	-44.81	-42.26	-44.85	-47.07	-8.54	-12.58	-14.91
Antenna Power Limit				10mW					
EIRP Limit				12.14dBm					
Antenna Tolerance Limit				+20% ~ -80%					
Result				Pass					


Note:

1. Antenna Output Power = Power Meter Reading / Burst Ratio
2. Antenna Output Power Tolerance = (Antenna Output Power - Declared Power) / Declared Power *100%
3. Antenna gain is 4.0dBi.


Please refer to the plots for normal voltage test.


Duty Cycle:

Low Channel

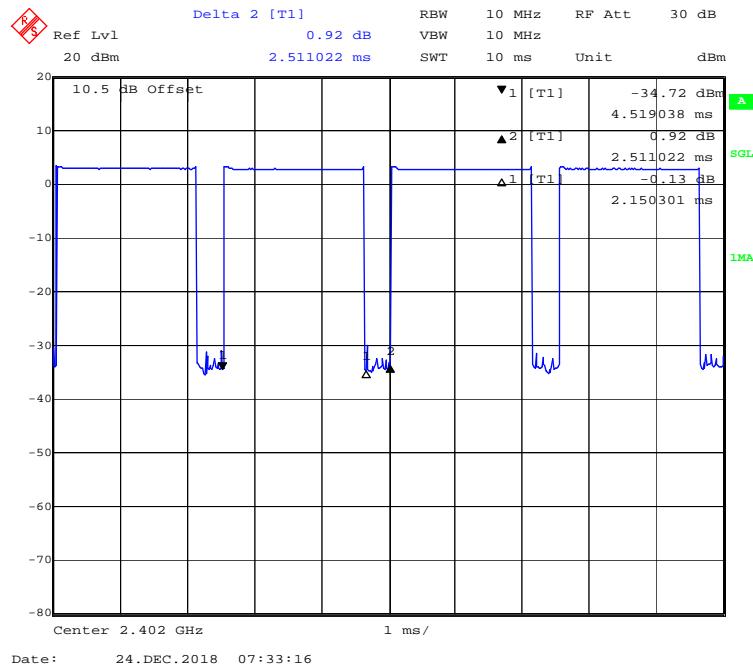

Middle Channel

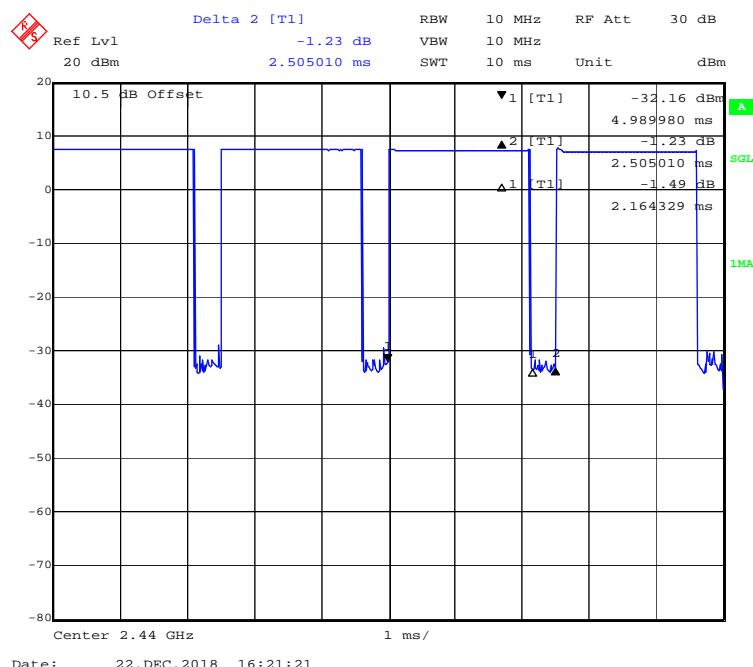

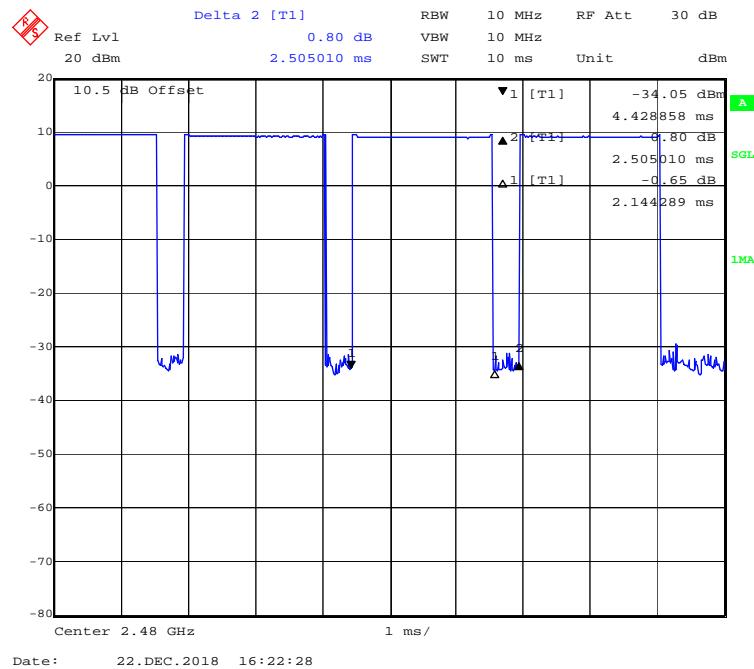High Channel


RECEIVER SPURIOUS EMISSION AND UNWANTED EMISSION INTENSITY

Limit

- $\leq 4 \text{ nW}$ ($30 \text{ MHz} \leq f \leq 1000 \text{ MHz}$)
- $\leq 20 \text{ nW}$ ($1 \text{ GHz} \leq f \leq 12.5 \text{ GHz}$)

Test Procedure

❖ Measurement System Diagram

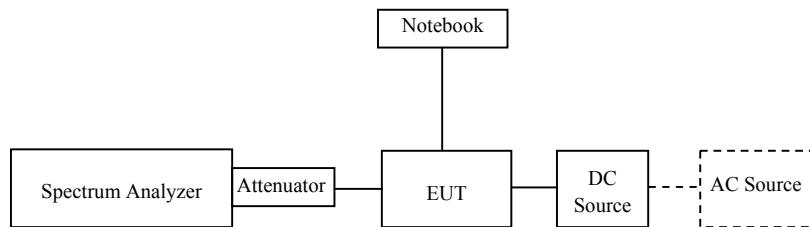

❖ Conditions of Application Equipment (EUT)

- The modulation state shall be “continuous receiving mode”.

❖ Spectrum Analyzer Conditions

- Start Frequency: Start Frequency of frequency range to measure (30MHz or 1GHz)
- Stop Frequency: Stop Frequency of frequency range to measure (1GHz or 12.5GHz)
- Span: AUTO (Measurement Range)
- RBW: 100 kHz, VBW: 100 kHz for Frequency < 1 GHz
- RBW: 1MHz, VBW: 1MHz for Frequency > 1 GHz
- Sweep time: AUTO or more
- Sweep mode: Auto Sweep
- Detection: Positive Peak
- Reference Level: Enough level for maximum dynamic range

Measurement Result

Environmental Conditions

Temperature:	22.4 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Stone Zhang on 2018-12-22.

Test Result: Compliant.

Test Mode: Receiving

Frequency Band		2402 MHz			2440 MHz			2480 MHz			Limit
Voltage (V _{DC})		2.97	3.30	3.63	2.97	3.30	3.63	2.97	3.30	3.63	
Unwanted Emission Intensity	Band VI (dBm)	-76.41	-77.39	-77.42	-76.55	-77.24	-76.38	-76.35	-77.25	-76.43	-54dBm (4nW)
	Band VII (dBm)	-58.98	-58.49	-58.48	-59.91	-58.95	-58.98	-60.43	-59.47	-58.90	-47dBm (20nW)

Note:


Band VI: 30MHz~1000MHz

Band VII: 1000MHz~12500MHz


Please refer to the plots for normal voltage test.

Low Channel:

$30MHz \sim 1000MHz$

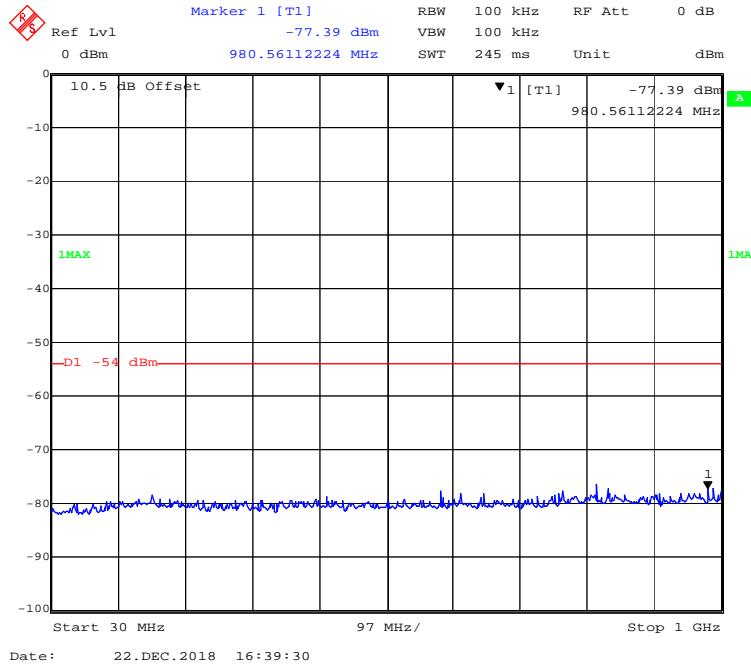


$1000MHz \sim 12500MHz$

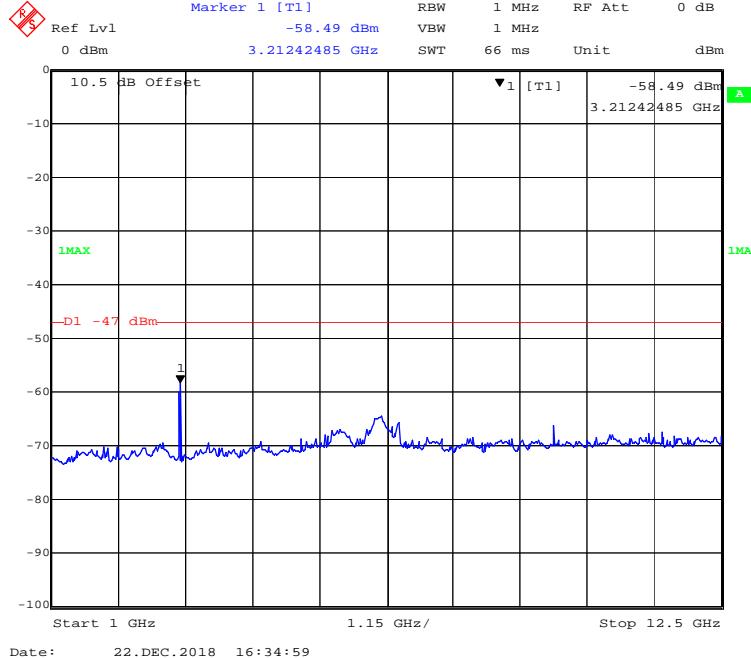


Middle Channel:

$30MHz \sim 1000MHz$

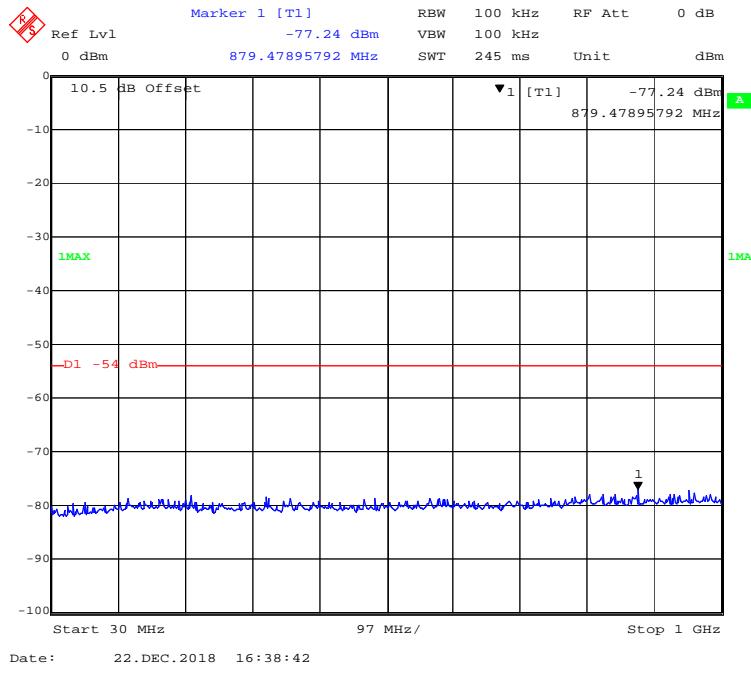

Date: 22.DEC.2018 16:38:42


$1000MHz \sim 12500MHz$

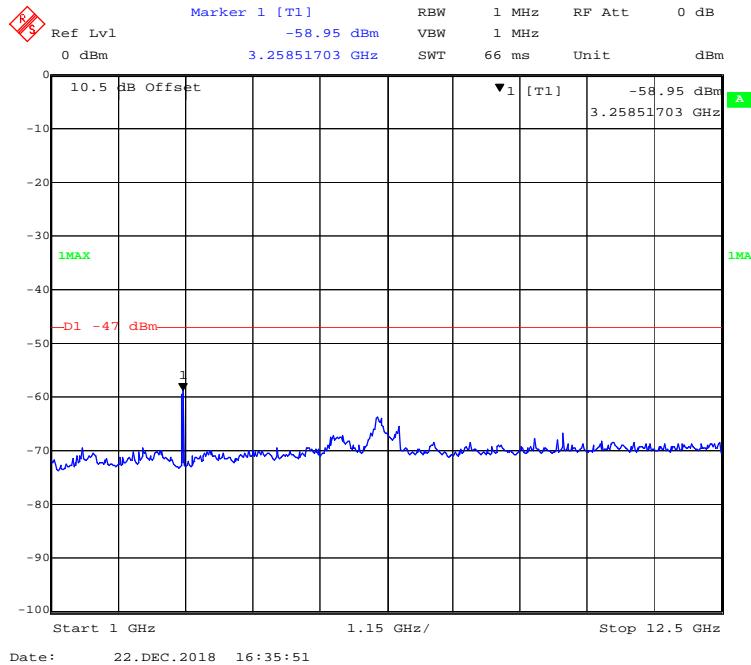


Date: 22.DEC.2018 16:35:51

High Channel:

$30MHz \sim 1000MHz$

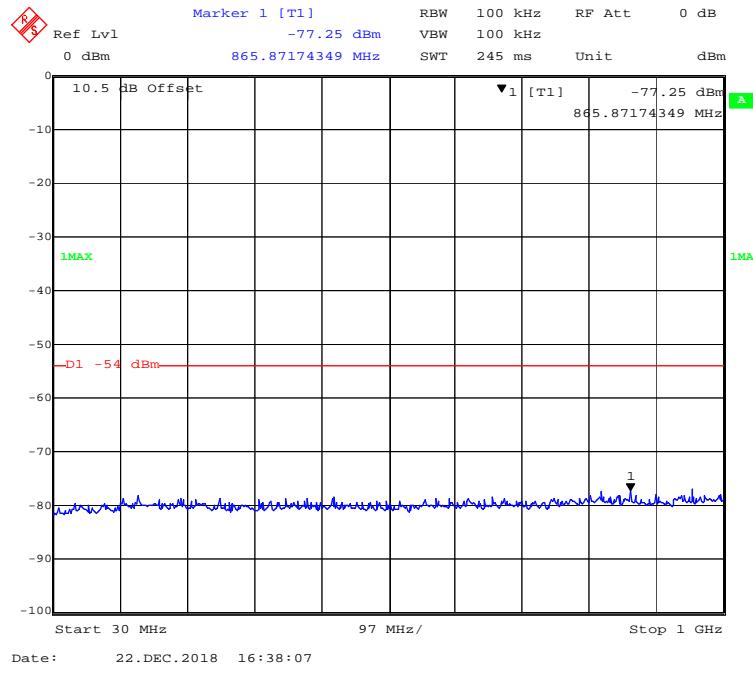

$1000MHz \sim 12500MHz$

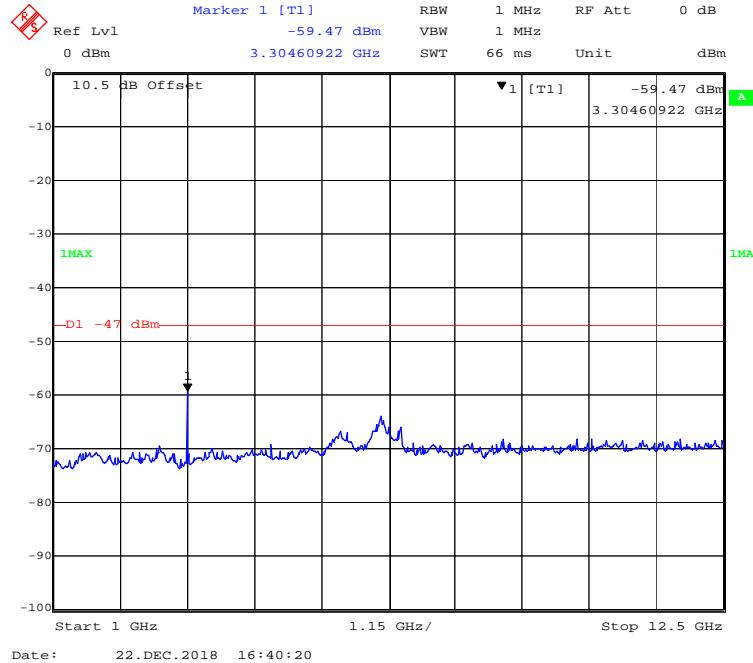

INTERFERENCE PREVENTION FUNCTION

Requirement

The EUT shall have the interference prevention capability to transmit or to receive the identification automatically, so that sender and receiver shall exclude other equipment.

Test Procedure

In the case that the EUT has the function of automatically transmitting the identification code:

1. Transmit the predetermined identification codes from EUT
2. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

1. Transmit the predetermined identification codes from the counterpart.
2. Check if communication is normal
3. Transmit the signal other than predetermined ID codes from the counterpart.
4. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

Test Data

Environmental Conditions

Temperature:	22.4 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Stone Zhang on 2018-12-24.

Test Result: Good


CONSTRUCTION PROTECTION CONFIRMATION

Limit

The high-frequency section and modulation section of the radio equipment except for the antenna system shall not be capable of being opened easily.

Confirmation Method

The EUT is used for OEM (original equipment manufacturer) to install the final device, the high frequency section and modulation section will be protected by the host device.

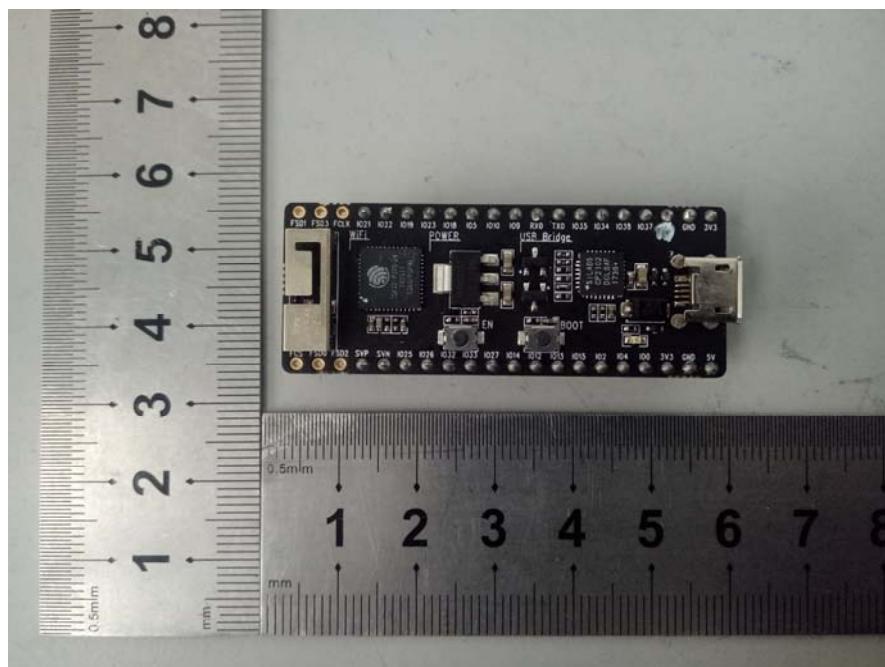

****END OF REPORT****