



TEST REPORT

Application No.: SHEM2104003862CR
Japan MIC No.:
Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Applicant: No.555 Qianmo Road,Binjiang District Hangzhou 310052,China
Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Manufacturer: No.555 Qianmo Road,Binjiang District Hangzhou 310052,China
Factory: 1.Hangzhou Hikvision Technology Co., Ltd.
 2.Hangzhou Hikvision Electronics Co.,Ltd.
Address of Factory: 1.No.700,Dongliu Road,Binjiang District,Hangzhou City,Zhejiang,310052,China
 2.No.299,Qiushi Road,Tonglu Economic Development Zone,Tonglu County,Hangzhou,Zhejiang,310052,China.
Equipment Under Test (EUT):
EUT Name: Interactive Tablets
Model No.: DS-D5B86RB/A, DS-D5B86RB/B, DS-D5B86RB/C, DS-D5B86RD/A, DS-D5B86RD/B, DS-D5B86RD/C,DS-D5B86RO/A, DS-D5B86RO/B, DS-D5B86RO/C, DS-D5D86RB/A, DS-D5D86RB/B, DS-D5X86XX/XXXX(X stand for A-Z, 0-9 or blank)
Standard(s) : MIC Item 19 of Article 2 Paragraph 1
Date of Receipt: 2021-08-30
Date of Test: 2021-08-31 to 2021-09-01
Date of Issue: 2021-09-03

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Parlam Zhan

Parlam Zhan
E&E Section Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2021-09-03	/

Authorized for issue by:			
		<i>Michael Niu</i>	
		Micheal Niu / Project Engineer	
		<i>Parlam Zhan</i>	
		Parlam Zhan / Reviewer	

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



2 Test Summary

Test	Test Requirement	Limit/Severity	Result
Antenna Requirement	Item 19-3, 19-3-2 of Article 2-1		PASS
Frequency Error		±20 PPM or less	PASS
Occupied Bandwidth		Refer to Clause 7.2	PASS
Antenna Power and EIRP		Refer to Clause 7.3	PASS
Adjacent channel power tolerance		Refer to Clause 7.4	PASS
Out-band emission power		Refer to Clause 7.5	PASS
Spurious Emission Intensity		Refer to Clause 7.6	PASS
Secondary Radiated Emission		(1) Below 1 GHz: -54dBm (2) Above 1GHz: -47dBm	PASS
Interference prevention function		Notice 88 Appendix 45	PASS
Carrier sensing Capability		Shall not transmit radio wave when receiving over 100mV/m	PASS
Transmission Burst Length		4ms or less	PASS

Remark:

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS	5
4.3 MEASUREMENT UNCERTAINTY	6
4.4 TEST LOCATION	7
4.5 TEST FACILITY	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5 EQUIPMENT LIST	8
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	9
6.1 E.U.T. TEST CONDITIONS	9
6.2 ANTENNA REQUIREMENT	12
6.3 INTERFERENCE PREVENTION CAPABILITY	13
6.4 RF ACCESSIBILITY	14
7 RADIO SPECTRUM MATTER TEST RESULTS	15
7.1 FREQUENCY ERROR	15
7.2 OCCUPIED BANDWIDTH (99%)	16
7.3 ANTENNA POWER	17
7.4 ADJACENT CHANNEL LEAKAGE POWER	20
7.5 OUT OF BAND LEAKAGE POWER	23
7.6 SPURIOUS EMISSION OF TX	29
7.7 RADIATED EMISSIONS OF RX	32
7.8 TRANSMISSION BURST LENGTH	34
7.9 CARRIER SENSING CAPABILITY	35
8 PHOTOGRAPHS	36



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	AC100-240V 50/60Hz
Test voltage:	AC 100V 60Hz
Cable:	DC Cable 3m for POE
Operation Frequency:	802.11a/n(HT20)/ac(HT20): 5180-5240MHz 802.11n(HT40)/ac(HT40): 5190-5230MHz 802.11ac(HT80): 5210MHz
Modulation Technique:	OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK) Remark: 256QAM for 802.11 ac only 802.11a: 6/9/12/18/24/36/48/54Mbps
Data Rate:	802.11n: MCS0-7 802.11ac: MCS0-9 802.11 a/n(HT20)/ac(HT20): 4 Channel 36, 40, 44, 48
Number of Channel:	802.11 n(HT40)/ac(HT40): 2 Channel 38, 46 802.11ac(HT80):42
Antenna Type	PCB Antenna RTL8812cu:
Antenna Gain	Antenna 1: 3.06dBi (Provided by manufacturer) Antenna 2: 3.60Bi (Provided by manufacturer) MT7668: Antenna 1: 2.30dBi (Provided by manufacturer) Antenna 2: 0.78dBi (Provided by manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	ThinkPad X100e	/

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 8.4 \times 10^{-8}$
2	Timeout	$\pm 2s$
3	Duty cycle	$\pm 0.37\%$
4	Occupied Bandwidth	$\pm 3\%$
5	RF conducted power	$\pm 0.6dB$
6	RF power density	$\pm 2.84dB$
7	Conducted Spurious emissions	$\pm 0.75dB$
8	RF Radiated power	$\pm 4.6dB$ (Below 1GHz)
		$\pm 4.1dB$ (Above 1GHz)
9	Radiated Spurious emission test	$\pm 4.2dB$ (Below 30MHz)
		$\pm 4.4dB$ (30MHz-1GHz)
		$\pm 4.8dB$ (1GHz-18GHz)
		$\pm 5.2dB$ (Above 18GHz)
10	Temperature test	$\pm 1^{\circ}C$
11	Humidity test	$\pm 3\%$
12	Supply voltages	$\pm 1.5\%$
13	Time	$\pm 3\%$

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab
588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized by Federal Communications Commission (FCC) as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

ISED#: 8617A.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

- **GAC (No. ATL 0031)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the GCC Accreditation Center (GAC) in accordance with the recognised International standard ISO/IEC 17025: 2017.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date	Cal body	Certifier
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2020-12-20	2021-12-19	JEPSI*	(c)
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2021-08-13	2022-08-12	JEPSI*	(c)
Signal Generator	R&S	SMR20	SHEM006-1	2021-08-13	2022-08-12	JEPSI*	(c)
Signal Generator	Agilent	N5182A	SHEM182-1	2021-08-13	2022-08-12	JEPSI*	(c)
Communication Tester	R&S	CMW270	SHEM183-1	2021-08-13	2022-08-12	JEPSI*	(c)
Switcher+ Power Sensor	Tonscend / Keysight	JS0806 U2021XA*4	SHEM184-1	2021-08-13	2022-08-12	JEPSI*	(c)
Splitter	Anritsu	MA1612A	SHEM185-1	/	/	JEPSI*	(c)
Coupler	e-meca	803-S-1	SHEM186-1	/	/	JEPSI*	(c)
EMI Test Receiver	R&S	ESU40	SHEM051-1	2020-12-20	2021-12-19	JEPSI*	(c)
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2018-09-25	2021-09-24	SGS SHCAL	(c)
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2020-12-20	2021-12-19	JEPSI*	(c)
DC Power Supply	MCH	MCH-303A	SHEM210-1	2020-12-20	2021-12-19	JEPSI*	(c)
Conducted test Cable	/	RF01~RF04	/	2020-12-20	2021-12-19	JEPSI*	(c)

Remark:

- (a) Calibration conducted by the National Institute of Information and Communications Technology (NICT) in Japan (hereinafter referred to as "NICT") or a designated calibration agency under Article 102-18 paragraph (1) in JRL.
- (b) Correction conducted pursuant to the provisions of Article 135 or Article 144 of the Measurement Act (Act No. 51 of 1992) .
- (c) Calibration conducted in countries except Japan, which shall be equivalent to the calibration conducted by the NICT or a designated calibration agency under Article 102-18 paragraph (1).
- (d) Calibration, etc. conducted by using measuring instruments and other equipment listed in the right column of appended table No. 3, which shall have been given any type of calibration, etc. listed above from (a) to (c).

From JRL Article 24-2, paragraph 4, Item 2

Notice: Calibration duration for above equipments is 1 year.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



6 Radio Spectrum Technical Requirement

6.1 E.U.T. test conditions

Environment:	Temperature:	20.0 -25.0 °C
	Humidity:	35-75 % RH
	Atmospheric Pressure:	99.2 -102.0 kPa

Power supply: Test Voltage: rated voltage and $\pm 10\%$ of the rated voltage.

The product is supplied by AC 100V. The fluctuation of input voltage to the circuit of RF unit of test equipment is under $\pm 1\%$, when input voltage to the test equipment is fluctuated by $\pm 10\%$. So, all measurement has been conducted by only rated voltage AC 100V

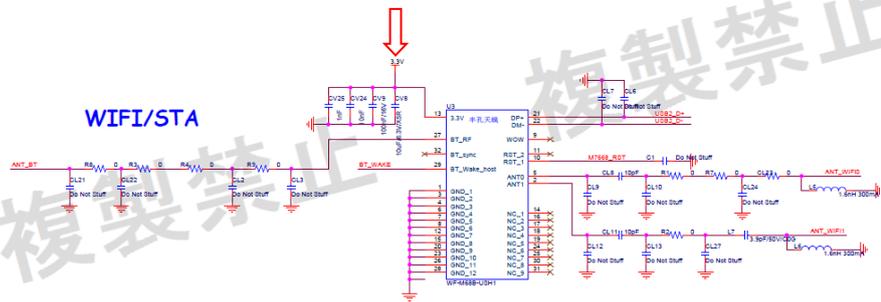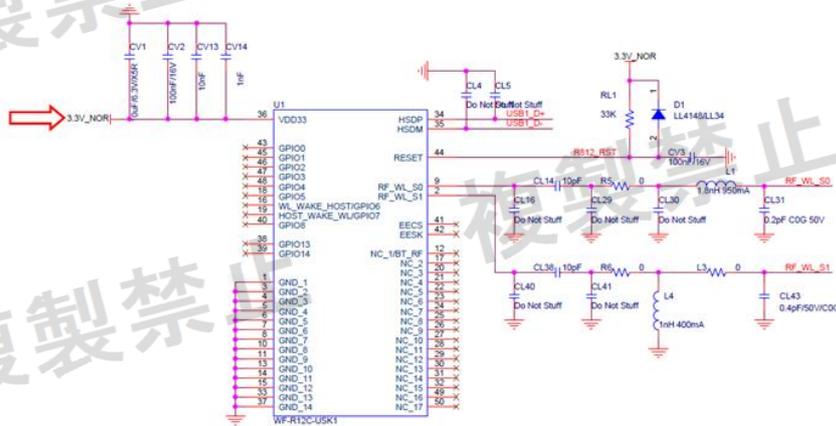

Test Mode Classify	Power Supply	Measured Value	Tolerance
TM 1	AC 100V 60Hz	DC 3.30V	0%
TM 2	AC 90V 60Hz	DC 3.29V	-0.3%
TM 3	AC 110V 60Hz	DC 3.31V	0.3%

Test frequencies:

If the EUT can be set to 3 or more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test frequencies:

performed with the available frequencies.

If the EUT can be set to 3 or more different (carrier) frequencies in 1 allocated band, testing shall be performed using the Lowest, Middle and the Highest frequency (L, M and H). If there are 2 or fewer frequencies, testing shall be performed with the available frequencies.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

EUT channels and frequencies list:

802.11 a/n/ac(HT20)

Channel	Frequency (MHz)
CH36	5180MHz
CH40	5200MHz
CH44	5220MHz
CH48	5240MHz

802.11 n/ac(HT40):

Channel	Frequency (MHz)
CH38	5190MHz
CH46	5230MHz

802.11 ac(HT80):

Channel	Frequency (MHz)
CH42	5210MHz

Using test software was control EUT work in continuous transmitter mode. And select test channel as below:
Through Preliminary tests were performed in all tests in different data rata and antenna configurations at lowest channel, the data rates of worse case as above were chosen for final test.

802.11 a/n/ac(HT20)			802.11 n/ac(HT40)	
Frequency	Data rate		Frequency	Data rate
	a	n/ac20		
5180MHz	6Mbps	MCS0	5190MHz	MCS0
5220MHz	6Mbps	MCS0	5230MHz	MCS0
5240MHz	6Mbps	MCS0		
802.11 ac(HT80)				
Frequency	Data rate			
5210MHz	MCS0			

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.2 Antenna Requirement

6.2.1 Test Requirement:

MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

6.2.2 Conclusion

Standard requirement:


Applicable for equipment with an antenna terminal, including testing terminals. If an antenna connector is available, all relevant tests will be carried out conducted. If not, tests will be carried out in an anechoic room or with a suitable test-fixture.

EUT Details:

The antenna is PCB antenna and no consideration of replacement.

Result:

An antenna connector is available, all relevant tests will be carried out conducted.

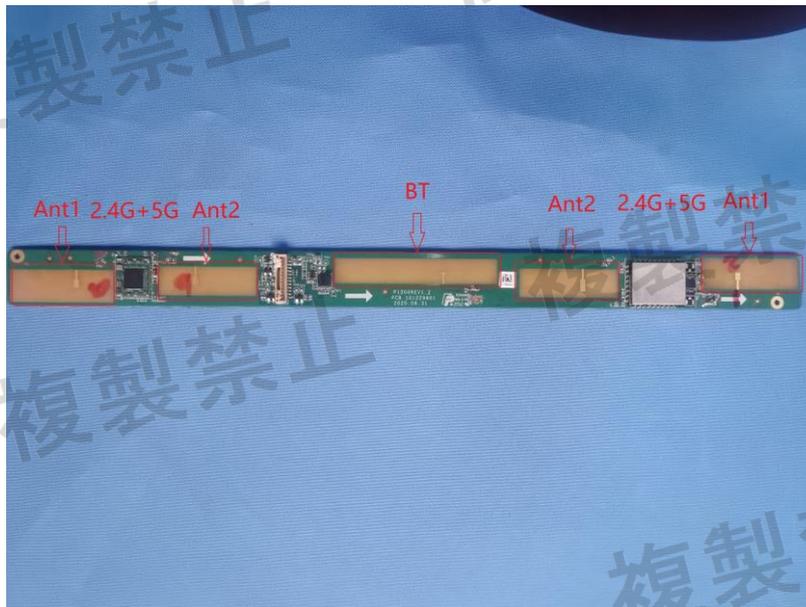

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.3 Interference prevention capability

6.3.1 Test Requirement:

MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

6.3.2 Test Setup Diagram



6.3.3 Conclusion

Standard Requirement:

- 1) Measurement system diagram as shown above and test equipment keep transmitting identification code.
- 2) Condition of measuring instrument
 - (1) Demodulator must be able to demodulate the transmitting signal emitted by test equipment and to indicate the identification code.
 - 3) Condition of test equipment the mode of normal use.
 - 4) Measuring operation procedure
 - (1) When test equipment has the function to transmit identification code automatically:
 - A) Transmit the predetermined identification code from test equipment.
 - B) Confirm the transmitted identification code by demodulator.

EUT Details:

The unit does meet the requirements (Good).

RTL8812cu

Hwaddr 40:24:b2:82:a0:d0

MT7668

Hwaddr 00:0c:43:26:60:48



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.4 RF accessibility

6.4.1 Test Requirement:

MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

6.4.2 Conclusion


Standard Requirement:

The EUT shall be constructed in such a way that sensitive RF parts, (like modulation and oscillator parts) cannot be reached easily by the user. These parts shall be covered by soldered metal caps or glue or by other mechanical covers. If the covers are fixed with screws, these shall be not the common type(s) like a Phillips, but special versions like Torx, so that the user cannot open the device with common tools.

EUT Details:

MT7668 using Soldered shield. that cannot be reached easily by the user

RTL8812cu using SMT technology that cannot be reached easily by the user

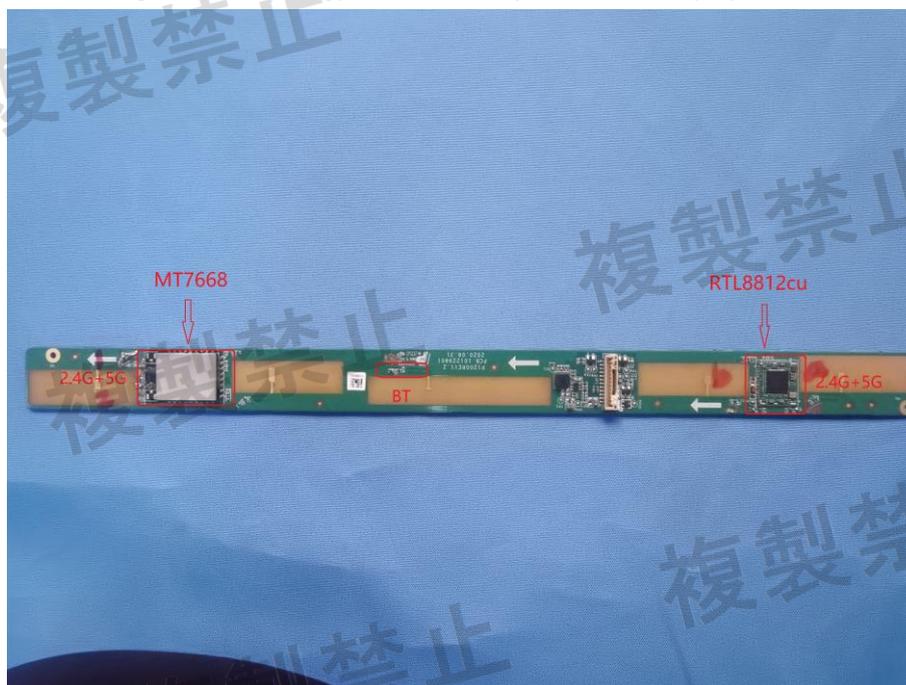

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7 Radio Spectrum Matter Test Results

7.1 Frequency Error

Test Requirement MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method: MIC Notice No.88 Appendix No.45
Limit: Tolerance of frequency: $\pm 20 \times 10^{-6}$

7.1.1 E.U.T. Operation

Operating Environment:
Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar
Test mode Test the EUT in transmitting mode.

7.1.2 Measurement Procedure and Data

1. Test Conditions:
Spectrum Analyzer is used for measurement.
2. EUT conditions:
Modulation/Spread/Hopping OFF, CW Tx
3. Spectrum Analyzer conditions:
Frequency: Test Frequency
Span 1MHz
RBW 10 kHz (Modulation OFF),
VBW 10 kHz (Modulation OFF),
Sweep Time Auto
Detector mode Positive peak
Indication mode Max hold
Alternative method:
Frequency: Test Frequency
Span 2 times channel bandwidth
RBW 100 kHz (Modulation ON),
VBW 100 kHz (Modulation ON),
Sweep Time Auto
Detector mode Positive peak
Indication mode Max hold

7.1.3 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu




7.2 Occupied Bandwidth (99%)

Test Requirement	MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.45
Limit:	20 MHz system: 5.2 GHz and 5.3 GHz band: OFDM: 19 MHz or less Other than OFDM: 18 MHz or less 5.6 GHz band: 19.7 MHz or less 40 MHz system: 38MHz or less 80 MHz system: 78MHz or less 160 MHz system: 158MHz or less 160 MHz (80+80MHz) system: 78MHz or less per band

7.2.1 E.U.T. Operation

Operating Environment:			
Temperature:	23 °C	Humidity:	54 % RH
		Atmospheric Pressure:	1010 mbar
Test mode	Test the EUT in transmitting mode.		

7.2.2 Test Setup Diagram



7.2.3 Measurement Procedure and Data

- Center frequency:** Test Frequency
- Sweep frequency band:** 2-3.5 times tolerance 40/80 MHz (OFDM; DSSS);
- Resolution bandwidth:** under 3% of tolerance. 300kHz (OFDM; DSSS);
- Video bandwidth:** comparable level to resolution bandwidth 300kHz (OFDM; DSSS);
- Sweep Time:** Auto
- Sweep mode:** continuous sweep
- detector mode:** Positive peak
- Indication mode:** Max hold
- OBW 99%

7.2.4 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.3 Antenna Power

Test Requirement	MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.45
Limit:	Tolerance:
	- 5.2 GHz and 5.3 GHz bands: +20% to -80%
	- 5.6 GHz band: +50% to -50%

5.2 and 5.3GHz Bands	
Antenna Power	
(1) DSSS	10mW/MHz or less
(2) OFDM	
OBW ≤ 19 MHz	10mW/MHz or less
19 MHz < OBW ≤ 38 MHz	5mW/MHz or less
38 MHz < OBW ≤ 78 MHz	2.5mW/MHz or less
78 MHz < OBW ≤ 158 MHz	1.25mW/MHz or less
(3) Other than DSSS OFDM	10mW
EIRP	
(1) OBW ≤ 19 MHz	
5.2 GHz Band	10mW/MHz or less
5.3 GHz Band	10mW/MHz or less 5mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(2) 19 MHz < OBW ≤ 38 MHz	
5.2 GHz Band	5mW/MHz or less
5.3 GHz Band	5mW/MHz or less 2.5mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(3) 38 MHz < OBW ≤ 78 MHz	
5.2 GHz Band	2.5mW/MHz or less
5.3 GHz Band	2.5mW/MHz or less 1.25mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(4) 78 MHz < OBW ≤ 158 MHz	
5.2 GHz and 5.3 GHz Band	1.25mW/MHz or less 0.625mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
5.6GHz Band	
Antenna Power	
(1) DSSS	10mW/MHz or less
(2) OFDM	
OBW ≤ 19.7 MHz	10mW/MHz or less
19.7 MHz < OBW ≤ 38 MHz	5mW/MHz or less



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

38 MHz < OBW ≤ 78 MHz	2.5mW/MHz or less
78 MHz < OBW ≤ 158 MHz	1.25mW/MHz or less
(3) Others	10mW
EIRP	
(1) OBW ≤ 19.7 MHz	50mW/MHz or less 25mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(2) 19.7 MHz < OBW ≤ 38 MHz	25mW/MHz or less 12.5mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(3) 38MHz < OBW ≤ 78MHz	12.5mW/MHz or less 6.25mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
(4) 78 MHz < OBW ≤ 158 MHz	6.25mW/MHz or less 3.125mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)
Transmission using two bandwidths under 5.2GHz, 5.3GHz and 5.6GHz band	
Antenna Power	
38MHz < OBW ≤ 78MHz	1.25mW/MHz or less
EIRP	
5.2 GHz band and 5.6 GHz band	1.25mW/MHz or less
5.3 GHz band and 5.6 GHz band	1.25mW/MHz or less 0.625mW/MHz or less (for EUTs that do NOT have Transmit Power Control functions)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode Test the EUT in transmitting mode.

7.3.2 Test Setup Diagram



7.3.3 Measurement Procedure and Data

[Setting 1] - Search for peak power frequency

Center Frequency	Test frequency
Span	Approximately twice the occupied bandwidth
RBW	1MHz
VBW	Approximately three times the RBW
Sweep time	Auto
Sweep data points	1001 or greater
Detector mode	Positive peak
Indication mode	Max hold

[Setting 2] - Measurement of average antenna power for OFDM, DSSS

Frequency	Frequency of peak power found using [Setting 1]
Span	0 Hz
RBW	1MHz
Detector mode	Sample
Sweep	Minimum time required to make an accurate measurement. For burst type (intermittent) transmission, sweep time shall be greater than one burst interval
Sweep data points	1001 or greater

[Setting 3] - Measurement of average antenna power other than for DSSS, OFDM

Frequency	Frequency of peak power found using [Setting 1]
Span	0 Hz
RBW	Bandwidth sufficient to cover that occupied by the carrier
VBW	Bandwidth sufficient to cover that occupied by the carrier
Detector mode	Sample
Sweep	Minimum time required to make an accurate measurement. For burst type (intermittent) transmission, sweep time shall be greater than one burst interval
Sweep data points	1001 or greater

7.3.4 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4 Adjacent channel leakage power

Test Requirement MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

Test Method: MIC Notice No.88 Appendix No.45

Limit:

5.2 GHz and 5.3GHz band			
Test Condition	Measurement Bandwidth	Separation from Center of Transmit Frequency	Limit
OBW ≤ 18MHz	18 MHz	20 MHz	25 dB or more
		40 MHz	40 dB or more
18MHz < OBW ≤ 19MHz	19 MHz	20 MHz	25 dB or more
		40 MHz	40 dB or more
19MHz < OBW ≤ 38MHz	38 MHz	40 MHz	25 dB or more
		80 MHz	40 dB or more
38MHz < OBW ≤ 78MHz	78 MHz	80 MHz	25 dB or more

5.6GHz band				
Test Condition	Measurement Bandwidth	Separation from Center of Transmit Frequency	Limit	
OFDM	OBW ≤ 19.7MHz	20 MHz	25 dB or more	
		40 MHz	40 dB or more	
	19.7MHz < OBW ≤ 38MHz	38 MHz	40 MHz	25 dB or more
		78 MHz	80 MHz	40 dB or more
38MHz < OBW ≤ 78MHz	78 MHz	80 MHz	25 dB or more	
		80 MHz	40 dB or more	
Other than OFDM	18 MHz	20 MHz	25 dB or more	
		40 MHz	40 dB or more	

5.2 GHz, 5.3 GHz and 5.6 GHz band			
Test Condition	Measurement Bandwidth	Separation from Center of Transmit Frequency	Limit
38MHz < OBW ≤ 78MHz	78 MHz	80 MHz	25 dB or more



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode Test the EUT in transmitting mode.

7.4.2 Test Setup Diagram



7.4.3 Measurement Procedure and Data

[Setting 1]

Center Frequency	Test Frequency
Span	(see Note1)
RBW	300kHz
VBW	300kHz
Sweep time	Auto
Sweep data points	1001 or greater
Detector mode	Sample (for Continuous Type) Positive peak (for Burst Type)
Indication mode	Single sweep (for Continuous Type) Max hold (for Burst Type)

Note1

5.2GHz and 5.3GHz Band

OBW ≤ 18MHz	18MHz
18MHz < OBW ≤ 19MHz	19MHz
19MHz < OBW ≤ 38MHz	38MHz
38MHz < OBW ≤ 78MHz	78MHz

5.6GHz Band

OFDM

OBW ≤ 19.7MHz	19MHz
19.7MHz < OBW ≤ 38MHz	38MHz
38MHz < OBW ≤ 78MHz	78MHz

Others

18MHz

EUT Configuration

- Continuous or burst transmission
- Modulated
- Rated output power declared in the construction design document

Test Procedure

- (1) Configure the spectrum analyzer to [Setting 1] and set the EUT to transmit mode
- (2) Measure the transmitter power (defined as P_c) using the procedure shown below
 - (a) Set the center of the span to the transmit frequency
 - (b) After sweeping the entire span, send the span data set to the P_c
 - (c) Convert measured data from dBm to Watts
 - (d) Sum all the data to derive the P_c

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



- (3) Measure the Upper Adjacent Channel Leakage Power (defined as P_U) using the procedure shown below. For measurement frequency, see Note2.
- Set the center of the span to [Transmit Frequency + 20 MHz (or 40 MHz)]
 - Sweep the entire span, send the span data set to the P_c
 - Convert measured data from dBm to Watts
 - Sum all the data to derive the P_U
 - After setting the center of the span to [Transmit Frequency + 40MHz (or 80 MHz)], repeat steps (b) through step (d)
- (4) Measure the Lower Adjacent Channel Leakage Power (defined as P_L) using the procedure shown below. For measurement frequency, see Note2.
- Set the center of the span to [Transmit Frequency + 20 MHz (or 40 MHz)]
 - Sweep the entire span, send the span data set to the P_c
 - Convert measured data from dBm to Watts
 - Sum all the data to derive the P_L
 - After setting the center of the span to [Transmit Frequency + 40MHz (or 80 MHz)], repeat steps (b) through step (d)
- (5) Derive all the Adjacent Channel Leakage Power Ratios using the formula shown below
- Upper Adjacent Channel Leakage Power Ratio = $10 \log (P_U / P_c)$
 - Lower Adjacent Channel Leakage Power Ratio = $10 \log (P_L / P_c)$
- (6) If the EUT has multiple antennas then the following steps shall be taken
- Repeat steps (1) through step (5) for each individual antenna
 - Repeat steps (1) through step (5) with all the antennas combined
 - To derive the total P_c , sum the individual antenna P_c measurements from step (a)
 - Derive the total P_U and total P_L using the same procedure as step (c)
 - Calculate the Adjacent Channel Leakage Power Ratio using the total P_c , total P_U and total P_L using the formula in step (5)
 - Note 2

5.2 GHz and 5.3 GHz band

OBW \leq 18 MHz	Transmit frequency \pm 20 MHz, \pm 40 MHz
18MHz < OBW \leq 19MHz	Transmit frequency \pm 20 MHz, \pm 40 MHz
19MHz < OBW \leq 38MHz	Transmit frequency \pm 40 MHz, \pm 80 MHz
38MHz < OBW \leq 78MHz	Transmit frequency \pm 80 MHz

5.6GHz Band

OFDM

OBW \leq 19.7MHz	Transmit frequency \pm 20 MHz, \pm 40 MHz
19.7MHz < OBW \leq 38MHz	Transmit frequency \pm 40 MHz, \pm 80 MHz
38MHz < OBW \leq 78MHz	Transmit frequency \pm 80 MHz

Other than OFDM

Transmit frequency \pm 20 MHz, \pm 40 MHz

7.4.4 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5 Out of Band Leakage Power

Test Requirement MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

Test Method: MIC Notice No.88 Appendix No.45

Limit:

5.2 GHz and 5.3GHz Band

(1) $OBW \leq 18MHz$

- For 5180 MHz, 5200 MHz, 5220 MHz and 5240 MHz (Reference Channel: 5240MHz)

Frequency Band EIRP (Δf : frequency in MHz)

5140MHz $\leq f \leq$ 5142MHz less than 2.5 $\mu W/MHz$

5142MHz $< f \leq$ 5150MHz less than 15 $\mu W/MHz$

5250MHz $\leq f <$ 5251MHz less than $10^{1-(\Delta f-9)}$ mW/MHz

5251MHz $\leq f <$ 5260MHz less than $10^{-1-(8/90)(\Delta f-11)}$ mW/MHz

5260MHz $\leq f <$ 5266.7MHz less than $10^{-1.8-(6/50)(\Delta f-20)}$ mW/MHz

5266.7MHz $\leq f \leq$ 5360MHz less than 2.5 $\mu W/MHz$

- For 5260 MHz, 5280 MHz, 5300 MHz and 5320 MHz (Reference Channel: 5260MHz)

Frequency Band EIRP (Δf : frequency in MHz)

5140MHz $\leq f \leq$ 5233.3MHz less than 2.5 $\mu W/MHz$

5233.3MHz $< f \leq$ 5240MHz less than $10^{-1.8-(6/50)(\Delta f-20)}$ mW/MHz

5240MHz $< f \leq$ 5249MHz less than $10^{-1-(8/90)(\Delta f-11)}$ mW/MHz

5249MHz $< f \leq$ 5250MHz less than $10^{1-(\Delta f-9)}$ mW/MHz

5350MHz $\leq f \leq$ 5360MHz less than 2.5 $\mu W/MHz$

(2) $18MHz < OBW \leq 19MHz$

- For 5180 MHz, 5200 MHz, 5220 MHz and 5240 MHz

Reference Channel: 5180MHz

Frequency Band EIRP

5135MHz $\leq f \leq$ 5142MHz less than 2.5 $\mu W/MHz$

5142MHz $< f \leq$ 5150MHz less than 15 $\mu W/MHz$

Reference Channel: 5240MHz

Frequency Band EIRP (Δf : frequency in MHz)

5250MHz $\leq f <$ 5251MHz less than $10^{1-(\Delta f-9)}$ mW/MHz

5251MHz $\leq f <$ 5260MHz less than $10^{-1-(8/90)(\Delta f-11)}$ mW/MHz

5260MHz $\leq f <$ 5266.7MHz less than $10^{-1.8-(6/50)(\Delta f-20)}$ mW/MHz

5266.7MHz $\leq f \leq$ 5365MHz less than 2.5 $\mu W/MHz$

- For 5260MHz, 5280 MHz, 5300MHz and 5320 MHz

Reference Channel: 5260MHz

5135MHz $\leq f \leq$ 5233.3MHz less than 2.5 $\mu W/MHz$

5233.3MHz $< f \leq$ 5240MHz less than $10^{-1.8-(6/50)(\Delta f-20)}$ mW/MHz

5240MHz $< f \leq$ 5249MHz less than $10^{-1-(8/90)(\Delta f-11)}$ mW/MHz

5249MHz $< f \leq$ 5250MHz less than $10^{1-(\Delta f-9)}$ mW/MHz

Reference Channel: 5320 MHz

Frequency Band EIRP

5350MHz $\leq f \leq$ 5365MHz less than 2.5 $\mu W/MHz$

(3) $19MHz < OBW \leq 38MHz$

- For 5190MHz and 5230MHz

Reference Channel: 5190 MHz

Frequency Band EIRP

5100MHz $\leq f \leq$ 5141.6MHz less than 2.5 $\mu W/MHz$

5141.6MHz $< f \leq$ 5150MHz less than 15 $\mu W/MHz$

Reference Channel: 5230 MHz

Frequency Band EIRP (Δf : frequency in MHz)

5250MHz $\leq f <$ 5251MHz less than $10^{-(\Delta f-20)+\log(1/2)}$ mW/MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5251MHz $\leq f < 5270$ MHz
 5270MHz $\leq f < 5278.4$ MHz
 5278.4MHz $\leq f \leq 5400$ MHz

- For 5270MHz and 5310MHz

Reference Channel: 5270 MHz

Frequency Band

5100MHz $\leq f \leq 5210$ MHz
 5210MHz $< f \leq 5221.6$ MHz
 5221.6MHz $< f \leq 5230$ MHz
 5230MHz $< f \leq 5249$ MHz
 5249Hz $< f \leq 5250$ MHz

Reference Channel: 5310 MHz

Frequency Band

5350MHz $\leq f < 5358.4$ MHz
 5358.4MHz $\leq f \leq 5400$ MHz

(4) 38MHz $< OBW \leq 78$ MHz

- For 5210 MHz

Reference Channel: 5210 MHz

Frequency Band

5020MHz $\leq f \leq 5123.2$ MHz
 5123.2MHz $< f \leq 5150$ MHz
 5250MHz $\leq f < 5251$ MHz
 5251MHz $\leq f < 5290$ MHz
 5290MHz $\leq f < 5296.7$ MHz
 5296.7MHz $\leq f \leq 5480$ MHz

- For 5290 MHz

Reference Channel: 5290 MHz

Frequency Band

5020MHz $\leq f \leq 5203.3$ MHz
 5203.3MHz $< f \leq 5210$ MHz
 5210MHz $< f \leq 5249$ MHz
 5249MHz $< f \leq 5250$ MHz
 5350MHz $\leq f < 5376.8$ MHz
 5376.8MHz $\leq f \leq 5480$ MHz

(5) 78MHz $< OBW \leq 158$ MHz

- For 5250MHz

Reference Channel: 5250 MHz

Frequency Band

4916MHz $\leq f \leq 5099.6$ MHz
 5099.6MHz $< f \leq 5150$ MHz
 5350MHz $\leq f < 5400.4$ MHz
 5400.4MHz $\leq f \leq 5584$ MHz

5.6GHz Band

(1) OBW ≤ 19.7 MHz

- For 5500 MHz, 5520 MHz, 5240 MHz, 5560 MHz, 5580 MHz, 5600 MHz, 5620 MHz, 5640 MHz, 5660 MHz, 5680 MHz and 5700 MHz

Modulation: Other than OFDM

Frequency Band

5460MHz $\leq f < 5470$ MHz
 5725MHz $\leq f \leq 5740$ MHz

Modulation: OFDM

Frequency Band

5455MHz $\leq f \leq 5460$ MHz
 5460MHz $< f \leq 5470$ MHz

less than $10^{-(8/190)(\Delta f-21)-1+\log(1/2)}$ mW/MHz
 less than $10^{-(3/50)(\Delta f-40)-1.8+\log(1/2)}$ mW/MHz
 less than 2.5 μ W/MHz

EIRP (Δf : frequency in MHz)

less than 2.5 μ W/MHz
 less than 2.5 μ W/MHz
 less than $10^{-(3/50)(\Delta f-40)-1.8+\log(1/2)}$ mW/MHz
 less than $10^{-(8/190)(\Delta f-21)-1+\log(1/2)}$ mW/MHz
 less than $10^{-(\Delta f-20)+\log(1/2)}$ mW/MHz

EIRP

less than 15 μ W/MHz
 less than 2.5 μ W/MHz

EIRP (Δf : frequency in MHz)

less than 2.5 μ W/MHz
 less than 15 μ W/MHz
 less than $10^{-(\Delta f-40)+\log(1/4)}$ mW/MHz
 less than $10^{-(8/390)(\Delta f-41)-1+\log(1/4)}$ mW/MHz
 less than $10^{-(3/100)(\Delta f-80)-1.8+\log(1/4)}$ mW/MHz
 less than 2.5 μ W/MHz

EIRP (Δf : frequency in MHz)

less than 2.5 μ W/MHz
 less than $10^{-(3/100)(\Delta f-80)-1.8+\log(1/4)}$ mW/MHz
 less than $10^{-(8/390)(\Delta f-41)-1+\log(1/4)}$ mW/MHz
 less than $10^{-(\Delta f-40)+\log(1/4)}$ mW/MHz
 less than 15 μ W/MHz
 less than 2.5 μ W/MHz

EIRP

less than 2.5 μ W/MHz
 less than 15 μ W/MHz
 less than 15 μ W/MHz
 less than 2.5 μ W/MHz

EIRP

less than 12.5 μ W/MHz
 less than 12.5 μ W/MHz

EIRP

less than 2.5 μ W/MHz
 less than 12.5 μ W/MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5725MHz ≤ f < 5740MHz less than 12.5 μW/MHz
 5740MHz ≤ f ≤ 5745MHz less than 2.5 μW/MHz

(2) 19.7MHz < OBW ≤ 38MHz

- For 5510 MHz, 5550 MHz, 5590 MHz, 5630 MHz and 5670 MHz

Frequency Band EIRP
 5420MHz ≤ f ≤ 5460MHz less than 12.5 μW/MHz
 5460MHz < f ≤ 5470MHz less than 50 μW/MHz
 5725MHz ≤ f ≤ 5760MHz less than 12.5 μW/MHz

(3) 38 MHz < OBW ≤ 78 MHz

- For 5530 MHz and 5610 MHz

Frequency Band EIRP
 5340 MHz ≤ f ≤ 5460 MHz less than 12.5 μW/MHz
 5460 MHz < f ≤ 5469.5 MHz less than 50 μW/MHz
 5469.5 MHz < f ≤ 5740 MHz less than 51.2 μW/MHz
 5725 MHz ≤ f ≤ 5800 MHz less than 12.5 μW/MHz

(4) 78 MHz < OBW ≤ 158 MHz

- For 5570 MHz

Frequency Band EIRP
 5236 MHz ≤ f ≤ 5419.6 MHz less than 12.5 μW/MHz
 5419.6 MHz < f ≤ 5470 MHz less than 50 μW/MHz
 5725 MHz ≤ f ≤ 5904 MHz less than 12.5 μW/MHz

5.2 GHz, 5.3GHz and 5.6GHz

Band

- For 80+80 MHz system using either of the following frequency band combinations:

- 5210 MHz and 5530MHz

- 5210 MHz and 5610MHz

Reference Channel: 5210MHz

Frequency Band EIRP (Δf: frequency in MHz)
 5020 MHz ≤ f ≤ 5134.8 MHz less than 2.5 μW/MHz
 5134.8 MHz < f ≤ 5150 MHz less than 12.5 μW/MHz
 5250 MHz ≤ f < 5251 MHz less than 10^{-(Δf-40)+log(1/8)} mW/MHz
 5251 MHz ≤ f < 5285.2 MHz less than 10^{-(8/390)(Δf-41)-1+log(1/8)} mW/MHz
 5285.2 MHz ≤ f < 5370MHz less than 2.5 μW/MHz

Reference Channel: 5530 MHz

Frequency Band EIRP
 5370 MHz ≤ f ≤ 454.8MHz less than 2.5 μW/MHz
 5454.8 Hz < f ≤ 5470MHz less than 15 μW/MHz

Reference Channel: 5610 MHz

Frequency Band EIRP
 5725 MHz ≤ f ≤ 5800MHz less than 15 μW/MHz

- For 80+80 MHz system using either of the following frequency band combinations:

- 5290 MHz and 5530 MHz

- 5290 MHz and 5610 MHz

Reference Channel: 5610 MHz

Frequency Band EIRP (Δf: frequency in MHz)
 5020MHz ≤ f ≤ 5214.8MHz less than 2.5 μW/MHz
 5214.8MHz < f ≤ 5249MHz less than 10^{-(8/390)(Δf-41)-1+log(1/8)} mW/MHz
 5249MHz < f ≤ 5250MHz less than 10^{-(Δf-40)+log(1/8)} mW/MHz
 5350MHz ≤ f < 5365.2MHz less than 15 μW/MHz
 5365.2MHz ≤ f < 5410MHz less than 2.5 μW/MHz

Reference Channel: 5530 MHz

Frequency Band EIRP
 5410MHz ≤ f ≤ 5454.8MHz less than 2.5 μW/MHz
 5454.8MHz < f ≤ 5470MHz less than 15 μW/MHz

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5725MHz ≤ f ≤ 5800MHz less than 15 μW/MHz

Reference Channel: 5610 MHz

Frequency Band EIRP

5725MHz ≤ f ≤ 5800MHz less than 15 μW/MHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode Test the EUT in transmitting mode.

7.5.2 Measurement Procedure and Data

[Setting 1]

Frequency range: (see Note1)

RBW: 1 MHz

VBW: 1 MHz

Sweep time: Minimum time required to make an accurate measurement
For burst type (intermittent) transmission, sweep time shall be greater than one burst

Detector mode: Positive peak

Indication mode: Max hold

[Setting 2]

Center Frequency: Frequency of peak power found using [Setting 1]

Span: 0 Hz

RBW: 1 MHz

VBW: 1 MHz

Sweep time: Minimum time required to make an accurate measurement
For burst type (intermittent) transmission, sweep time shall be greater than one burst

Detector mode: Sample

Note 1: Depending upon the EUT's specificat on, the frequency range shall be set as follows:

For 5180 MHz, 5200 MHz, 5220 MHz, 5240 MHz

OBW ≤ 18MHz:

5140 MHz - 5142 MHz,	5142 MHz - 5150 MHz,	5250 MHz - 5251 MHz,
5251 MHz - 5260 MHz,	5260 MHz - 5266.7 MHz,	5266.7 MHz - 5360 MHz

18MHz < OBW ≤ 19MHz:

5135 MHz - 5142 MHz,	5142 MHz - 5150 MHz,	5250 MHz - 5251 MHz,
5251 MHz - 5260 MHz,	5260 MHz - 5266.7 MHz,	5266.7 MHz - 5365 MHz

For 5190 MHz, 5230 MHz

5100 MHz - 5141.6 MHz,	5141.6 MHz - 5150 MHz,	5250 MHz - 5251 MHz,
5251 MHz - 5270 MHz,	5270 MHz - 5278.4 MHz,	5278.4 MHz - 5400 MHz

For 5210 MHz

5020 MHz - 5123.2 MHz,	5123.2 MHz - 5150 MHz,	5250 MHz - 5251 MHz,
5251 MHz - 5290 MHz,	5290 MHz - 5296.7 MHz,	5296.7 MHz - 5480 MHz

For 5250 MHz

4916 MHz - 5099.6 MHz,	5099.6 MHz - 5150 MHz,	5350 MHz - 5400.4 MHz,
5400.4 MHz - 5584 MHz		

For 5260 MHz, 5280 MHz, 5300 MHz, 5320 MHz

OBW ≤ 18MHz:

5140 MHz - 5233.3 MHz,	5233.3 MHz - 5240 MHz,	5240 MHz - 5249 MHz,
------------------------	------------------------	----------------------



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5249 MHz - 5250 MHz, 5350 MHz - 5360 MHz

18MHz < OBW ≤ 19MHz:5135 MHz - 5233.3 MHz, 5233.3 MHz - 5240 MHz, 5240 MHz - 5249 MHz,
5249 MHz - 5250 MHz, 5350 MHz - 5365 MHz**For 5270 MHz, 5310 MHz**5100 MHz - 5210 MHz, 5210 MHz - 5221.6 MHz, 5221.6 MHz - 5230 MHz,
5230 MHz - 5249 MHz, 5249 MHz - 5250 MHz, 5350 MHz - 5358.4 MHz,
5358.4 MHz - 5400 MHz**For 5290 MHz**5020 MHz - 5203.3 MHz, 5203.3 MHz - 5210 MHz, 5210 MHz - 5249 MHz,
5350 MHz - 5376.8 MHz, 5376.8 MHz - 5480 MHz**For 5500 MHz, 5520 MHz, 5540 MHz, 5560 MHz, 5580 MHz, 5600 MHz, 5620 MHz, 5630 MHz, 5640 MHz, 5660 MHz, 5670 MHz, 5680 MHz, 5700 MHz****OFDM**5455 MHz - 5460 MHz, 5460 MHz - 5470 MHz, 5725 MHz - 5740 MHz,
5740 MHz - 5745 MHz,**Other than OFDM**

5460 MHz - 5470 MHz, 5725 MHz - 5740 MHz,

For 5510 MHz, 5550 MHz, 5590 MHz, 5630 MHz, 5670 MHz

5240 MHz - 5460 MHz, 5460 MHz - 5470 MHz, 5725 MHz - 5760 MHz

For 5530 MHz, 5610 MHz5340 MHz - 5460 MHz, 5460 MHz - 5469.5 MHz, 5469.5 MHz - 5470 MHz,
5725 MHz - 5800 MHz**For 5570 MHz**

5236 MHz - 5419.6 MHz, 5419.6 MHz - 5470 MHz, 5725 MHz - 5904 MHz

For 5210 MHz + 5530 MHz, or 5210 MHz + 5610 MHz5020 MHz - 5134.8 MHz, 5134.8 MHz - 5150 MHz, 5250 MHz - 5251 MHz,
5251 MHz - 5285.2 MHz, 5285.2 MHz - 5370 MHz, 5370 MHz - 5454.8 MHz,
5454.8 MHz - 5470 MHz, 5725 MHz - 5800 MHz**For 5290MHz + 5530MHz, or 5290MHz + 5610MHz**5020 MHz - 5214.8 MHz, 5214.8 MHz - 5249 MHz, 5249 MHz - 5250 MHz,
5350 MHz - 5365.2 MHz, 5365.2 MHz - 5410 MHz, 5410 MHz - 5454.8 MHz,
5454.8 MHz - 5470 MHz, 5725 MHz - 5800 MHz**Test Procedure**

- (1) Configuring the spectrum analyzer to [Setting 1] and set the EUT to transmit mode
- (2) After sweeping the frequency range, search for the highest spurious emission. If EIRP converted from the highest spurious emission is lower than the Limit defined in 9.7 (Technical Standard), the result is "Pass", otherwise go to (3)
- (3) After configuring the spectrum analyzer using [Setting 2], then measure the average signal amplitude of the spurious and convert from the average value into EIRP. If the EIRP is lower than the Limit, the result is "Pass", otherwise "Fail".
If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time.
- (4) If the EUT has multiple antennas, obtain EIRPs from each individual antenna using steps (1) through (3). For the measurement, antenna gain from each antenna shall be used to calculate individual EIRPs
- (5) Convert the individual EIRPs (step (4)) from dB to absolute values
- (6) Combine (sum) the absolute values of the EIRPs at each frequency for each antenna (to create a single composite spectrum of EIRPs)
- (7) Ensure that the composite spectrum does not exceed the Limit
- (8) Measure the spurious emissions with all the antennas electrically combined

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

EIRP (defined POA) shall be calculated using the formula shown below.

$$P_{OA} = P_A + G_T - L_F$$

Where:

P_A : Measured value found in step (3) [dBm/MHz]
 G_T : antenna gain at the frequency of the spurious emission [dBi]
 L_F : cable loss [dB]

Note: G_T & L_F Compensated to SA offset

7.5.3 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668

Appendix D for SHEM210400386204CR-RTL8812cu

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6 Spurious Emission of TX

Test Requirement MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1

Test Method: MIC Notice No.88 Appendix No.45

Limit:

5.2GHz and 5.3GHz band

(1) $OBW \leq 18\text{ MHz}$

Below 5140 MHz: 2.5 μ W or less

Over 5360 MHz: 2.5 μ W or less

(2) $18\text{ MHz} < OBW \leq 19\text{ MHz}$

Below 5135 MHz: 2.5 μ W or less

Over 5365 MHz: 2.5 μ W or less

(3) $19\text{ MHz} < OBW \leq 38\text{ MHz}$

Below 5100 MHz: 2.5 μ W or less

Over 5400 MHz: 2.5 μ W or less

(4) $38\text{ MHz} < OBW \leq 78\text{ MHz}$

Below 5020 MHz: 2.5 μ W or less

Over 5480 MHz: 2.5 μ W or less

(5) $78\text{ MHz} < OBW$

Below 4916 MHz: 2.5 μ W or less

Over 5584 MHz: 2.5 μ W or less

5.6GHz Band

(1) $OBW \leq 19.7\text{ MHz}$

OFDM

Below 5455 MHz: 2.5 μ W or less

Over 5745 MHz: 2.5 μ W or less

Others

Below 5460 MHz: 2.5 μ W or less

Over 5740 MHz: 2.5 μ W or less

(2) $19.7\text{ MHz} < OBW \leq 38\text{ MHz}$

Below 5420 MHz: 2.5 μ W or less

Over 5760 MHz: 2.5 μ W or less

(3) $38\text{ MHz} < OBW \leq 78\text{ MHz}$

Below 5340 MHz: 2.5 μ W or less

Over 5800 MHz: 2.5 μ W or less

(4) $78\text{ MHz} < OBW$

Below 5236 MHz: 2.5 μ W or less

Over 5904 MHz: 2.5 μ W or less

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

Test mode TX mode_Keep the EUT in Transmitting mode.

7.6.2 Measurement Procedure and Data**[Setting 1]**

Frequency range: (see note)
 RBW: 30MHz~1GHz(100KHz) Above 1GHz:1 MHz
 VBW: 30MHz~1GHz(100KHz) Above 1GHz:1 MHz
 Sweep time: Auto
 Sweep data points: 1001 or greater
 Detector mode: Positive peak
 Indication mode: Max hold (see note)

Note: measurement range shall be 30 MHz to 26 GHz, except for the following cases:

- OBW ≤ 18 MHz

5.2 GHz and 5.3 GHz Band: 5140 MHz to 5360 MHz

5.6 GHz Band: 5460 MHz to 5740 MHz

- 18 MHz < OBW ≤ 19 MHz

5.2 GHz and 5.3 GHz Band: 5135 MHz to 5365 MHz

5.6 GHz Band: 5455 MHz to 5745 MHz

- 19 MHz < OBW ≤ 38 MHz

5.2 GHz and 5.3 GHz Band: 5100 MHz to 5400 MHz

5.6 GHz Band: 5420 MHz to 5760 MHz

- 38 MHz < OBW ≤ 78 MHz

5.2 GHz and 5.3 GHz Band: 5020 MHz to 5480 MHz

5.6 GHz Band: 5340 MHz to 5800 MHz

- 78 MHz < OBW

5.2 GHz and 5.3 GHz Band: 4916 MHz to 5584 MHz

5.6 GHz Band: 5236 MHz to 5904 MHz

Note: sweep shall be repeated until the max hold waveform is stable.

[Setting 2]

Center Frequency: Frequency of spurious emission found using [Setting 1]

Span: 0 Hz

RBW: 30MHz~1GHz(100KHz) Above 1GHz:1 MHz

VBW: 30MHz~1GHz(100KHz) Above 1GHz:1 MHz

Sweep: Minimum time required to make an accurate measurement.

For burst type (intermittent) spurious, sweep time shall be greater than one burst interval.

Sweep data points: 1001 or greater

Detector mode: Sample

EUT Configuration

- Continuous or burst transmission

- Modulated

- Rated output power should be as declared in the construction design document

- For 80+80MHz bandwidth systems, transmission should use both bandwidths simultaneously

Test Procedure

(1) After configuring the spectrum analyzer to [Setting 1], search for spurious emissions from 30

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

MHz to 26GHz. If spurious emissions greater than [limit - 3dB] are found, then more detailed measurements are required, go to step (2)

(2) Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time.

(3) If the EUT has multiple antennas, measure the spurious emission form each individual antenna using steps (1) through (2)

(4) Convert the individual antenna spurious level measurements (step (3)) from dB to absolute values

(5) Combine (sum) the absolute values of the spurious measurements at each frequency for each antenna (to create a single composite spectrum of spurious emissions)

(6) Ensure that the composite spectrum does not exceed the Limit

7.6.3 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668

Appendix D for SHEM210400386204CR-RTL8812cu

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.7 Radiated Emissions of RX

Test Requirement	MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.45
Limit:	(1) Below 1 GHz: 4 nW (-54dBm) or less (2) Above 1 GHz: 20 nW (-47dBm) or less

7.7.1 E.U.T. Operation

Operating Environment:

Temperature:	23 °C	Humidity:	54 % RH	Atmospheric Pressure:	1010 mbar
Test mode	RX mode_Keep the EUT in receiving mode.				

7.7.2 Measurement Procedure and Data**Spectrum Analyzer Settings****[Setting 1]**

Frequency:	30 MHz - 26 GHz		
RBW:	Below 1GHz:	100 kHz	
	Above 1GHz:	1 MHz	
VBW:	Below 1GHz:	100 kHz	
	Above 1GHz:	1 MHz	
Sweep time:	Auto		
Sweep data points:	1001 or greater		
Detector mode:	Positive peak		
Indication mode:	Max hold		

[Setting 2]

Frequency:	Frequency of spurious emission		
Span:	0 Hz		
RBW:	Below 1GHz:	100 kHz	
	Above 1GHz:	1 MHz	
VBW:	Below 1GHz:	100 kHz	
	Above 1GHz:	1 MHz	
Sweep time:	Auto		
Sweep data points:	1001 or greater		
Detector mode:	Sample		

EUT Configuration

Continuous receive.

Test Proceed

(1) Configure the spectrum analyzer to [Setting 1] and then search for spurious emissions in the range 30 MHz to 26GHz. If the sweep range does not cover the required measurement frequency range then the measurement range will need to be divided into sufficient sections of size [RBW x Sweep Data Points].

(2) If spurious emissions are found with an amplitude greater than [Limit - 10dB] then perform further detailed measurement as described in (3)

(3) Configure the spectrum analyzer using [Setting 2] and measure the average signal amplitude. If the spurious emission is burst type (intermittent), then the average value shall not include signal OFF time Multiple Antenna Systems

If the EUT has multiple antennas then emissions from each antenna shall be measured individually, as described below

(4) For each antenna repeat steps (1) through (3). Convert all spurious level measurements from dB to absolute value

(5) Combine (sum) the absolute values of the spurious measurements at each frequency for each antenna (to create a single composite spectrum of spurious emissions)

(6) Ensure that the composite spectrum does not exceed the Limit defined in 10.7 (Technical Standard)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Presentation of Results

All secondary radiated emission measurements shall be recorded in two ranges:

- (1) Below 1 GHz
- (2) Above 1 GHz

Each antenna results shall be recorded in the report as follows:

- If the emissions are below the value [Limit - 10dB], then record only the maximum spurious emissions
- If the emissions are over the value [Limit - 10dB], then record all spurious emissions

For multiple antenna systems, the combined spectrum measurements from section (7) shall be recorded in the report as follows:

- If the emissions are below the value [(Limit / Number of Antenna) - 10dB], then record only the maximum spurious emission
- If the emissions are over the value [(Limit / Number of Antenna) - 10dB], then record all spurious emissions

7.7.3 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668

Appendix D for SHEM210400386204CR-RTL8812cu



7.8 Transmission Burst Length

Test Requirement	MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.45
Limit:	Transmission Burst Length shall be 4ms or less

7.8.1 E.U.T. Operation

Operating Environment:			
Temperature:	23 °C	Humidity:	54 % RH
		Atmospheric Pressure:	1010 mbar
Test mode	Test the EUT in transmitting mode.		

7.8.2 Measurement Procedure and Data**Spectrum Analyzer Settings****[Setting 1]**

Frequency:	Test frequency
Span:	0Hz
RBW:	10MHz or greater
VBW:	10MHz
Sweep time:	Auto
Detector mode:	Positive peak
Trigger:	Rising edge

EUT Configuration

- burst transmission
- Modulated

Test Procedure

- (1) Configure the spectrum analyzer using [Setting 1] and set the EUT into transmit mode, then measure the Transmission Burst Length.
- (2) For multiple antennas systems, all antenna shall be combined as shown below. The resulting waveform will show the separate antenna signals superimposed, measure the Combined Transmission Burst Length from the start of the rising edge to the end of the falling edge.

7.8.3 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.9 Carrier Sensing Capability

Test Requirement	MIC Item 19-3, 19-3-2 of Article 2 Paragraph 1
Test Method:	MIC Notice No.88 Appendix No.45
Limit:	Shall not transmit radio wave when receiving over 100mV/m

7.9.1 Test Configuration:

Test with test equipment only

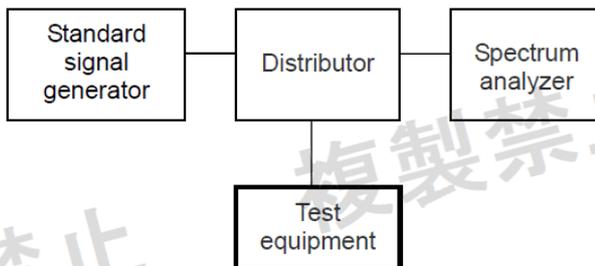

7.9.2 E.U.T. Operation

Operating Environment:

Temperature:	23 °C	Humidity:	54 % RH	Atmospheric Pressure:	1010 mbar
Test mode	Set the test equipment at the test frequency and the test spread code, and set it to the receiving mode, when using external test equipment, establish a connection				

7.9.3 Measurement Procedure and Data

Test Procedure:

- (1) Set the standard signal generator as follows:
 - Carrier frequency: Center frequency of receiving frequency band of test equipment
 - Modulation: No modulation (when the carrier sense function does not work by the the unmodulated subcarrier in center frequency, shift the frequency or modulate if needed.)
 - Output level: In the antenna input unit of a test equipment, field intensity is equivalent to the value which becomes 100mV/m.
- (2) Set the spectrum analyzer as follows:
 - Center frequency: Center frequency of the bandwidth used.
 - Sweep frequency band: 50MHz
 - Resolution bandwidth: Approximately 1 MHz
 - Video bandwidth: Approximately same as the resolution bandwidth
 - Y-axis scale: 10dB/Div
 - Trigger condition: Free-run
 - Detective mode: Positive peak
- (3) Measuring operation
 - (a) Test with test equipment only: Set the test equipment to the transmitting operation with the output of standard signal generator OFF, and confirm that it emits radio wave, using spectrum analyzer.
 - (b) Set the test equipment to the receiving mode.
 - (c) Set the test equipment to the transmitting operation with the output of standard signal generator ON, and confirm that it does not emit radio wave, using spectrum analyzer.

7.9.4 Test Result

The detailed test data see: Appendix D for SHEM210400386204CR-MT7668
Appendix D for SHEM210400386204CR-RTL8812cu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

8 Photographs

Refer to the < Photographs >

--End of Report--



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com