



Radio Test Report (Bluetooth LE)

Report No.: RJ180912C10-3

Test Model: ZenoCCU

Received Date: Sep. 12, 2018

Test Date: Oct. 16 ~ Nov. 16, 2018

Issued Date: Nov. 26, 2018

Applicant: ADVANTECH CO., LTD

Address: 1, Alley 20, Lane 26, Rueiguang Road, Neihu District, Taipei 114, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specifically mentioned, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.3 Test Conditions	9
3.4 Assembly	9
3.5 Antenna Specifications	9
3.5.1 Antenna Gain	9
3.5.2 Antenna Pattern	10
4 Test Results	13
4.1 Frequency Tolerance Measurement	13
4.1.1 Limits of Frequency Tolerance Measurement	13
4.1.2 Test Setup	13
4.1.3 Test Results	13
4.2 Occupied Bandwidth Measurement (99% power bandwidth)	14
4.2.1 Limits of Occupied Bandwidth Measurement	14
4.2.2 Test Setup	14
4.2.3 Test Results	15
4.3 Spreading Bandwidth Measurement (90% power bandwidth)	18
4.3.1 Limits of Spreading Bandwidth and Spreading Factor Measurement	18
4.3.2 Test Setup	18
4.3.3 Test Results	18
4.4 Spurious Emissions for Transmitter Measurement	22
4.4.1 Limits of Spurious Emissions	22
4.4.2 Test Setup	22
4.4.3 Test Results	23
4.5 Antenna Power Measurement	34
4.5.1 Limits of Antenna Power	34
4.5.2 Test Setup	34
4.5.3 Test Results	35
4.6 Spurious Emissions for Receiver	36
4.6.1 Limits of Spurious Emissions for Receiver	36
4.6.2 Test Setup	36
4.6.3 Test Result	37
4.7 Interference Prevention Function	41
4.7.1 Limits of Interference Prevention Function	41
4.7.2 Test Setup	41
4.7.3 Test Results	41
5 Test Instruments	42
6 Photographs of the Test Configuration	43
Appendix - Information on the Testing Laboratories	44



Release Control Record

Issue No.	Description	Date Issued
RJ180912C10-3	Original release	Nov. 26, 2018



1 Certificate of Conformity

Product: IPC

Brand: Zenoway

Test Model: ZenoCCU

Sample Status: Engineering sample

Applicant: ADVANTECH CO., LTD

Test Date: Oct. 16 ~ Nov. 16, 2018

Standards: ARIB STD-T66 (V3.7), MIC notice 88 Appendix 43
Article 2 Paragraph 1 of Item 19

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Pettie Chen
Pettie Chen / Senior Specialist

Date:

Nov. 26, 2018

Approved by :

Bruce Chen
Bruce Chen / Project Engineer

Date:

Nov. 26, 2018

2 Summary of Test Results

The EUT has been tested according to the following specifications:

Notice 88 Appendix 43 Reference	ARIB STD-T66 Ref.	Report Reference	Parameter	Test Results (Note)
General Provisions				
C	3.2 (4)	4.1	Frequency tolerance	C
D	3.2 (7)	4.2	Occupied bandwidth	C
E	3.2 (6)	4.4	Spurious emissions	C
Transmitting Equipment				
F	--	4.5	Antenna power	C
--	--	--	SAR	NA
Transmitting Antenna				
--	--	3.5	Type, configuration, etc. of transmitting antenna	C
--	--	3.5	Direction pattern of transmitting antenna	C
Receiving Equipment				
G	3.3 (1)	4.6	Spurious emissions of receiver	C
--	--	3.6	Refer to all articles for transmitting antenna	C
Operating Frequency 2400 to 2483.5MHz				
--	3.7 (1)	3.2	High Frequency	C
--	3.7 (1)	3.4	Modulation section cannot be opened easily	C
--	3.1 (1)	3.1	Communication method	C
--	3.2 (1)a	3.1	Modulation method	C
--	3.2 (1)a	3.1	Spread spectrum method	C
--	3.2 (2)	4.5	Antenna power	C
--	3.6 (2)	3.5.2	Absolute gain of transmitting antenna	C
--	3.6 (2)	--	Angular width of principal radiation (AWPR)	NA
--	3.2 (10)	--	Number of carriers within 1 MHz bandwidth in OFDM	NA
--	3.2 (8)	4.3	Spreading bandwidth	C
--	3.2 (9)	4.3	Spreading factor	C
--	3.2 (11)	--	Frequency retention time (FH employed)	NA
--	3.4.1(1)	4.7	Interference Prevention Function	C
Note: C = Conform NC = Not Conform NT = Not Tested NA = Not Applicable				

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in TR 100 028-1.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameter	Uncertainty
Occupied Bandwidth	491.896Hz
Spurious emissions	3.508dB
Output power density	2.889dB
Adjacent Channel Leakage Power	1.35dB
Out of band radiated power	3.93dB
Frequency Tolerance	6805.18Hz
Burst length	0.01%

2.2 Modification Record

There were no modifications required for compliance.



3 General Information

3.1 General Description of EUT

Product	IPC
Brand	Zenoway
Test Model	ZenoCCU
Status of EUT	Engineering sample
Nominal Voltage	9-60Vdc
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Rated RF Output Power Density	4.00mW
Conducted RF Output Power Density	1.663mW
Radiated RF Output Power Density	3.005mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT uses following antenna.

Antenna 1							
Type	Monopole						
Connector	RP-SMA(M)						
Straight position							
Frequency (MHz)	2400	2450	2500	5150	5350	5750	5850
Gain (dBi)	1.04	1.25	0.82	0.85	1.38	0.28	1.04
Bent position 90°							
Frequency (MHz)	2400	2450	2500	5150	5350	5750	5850
Gain (dBi)	1.19	1.57	2.57	0.66	1.03	0.59	1.19

Antenna 2		
Type	Monopole	
Connector	SMA Male Reverse	
Frequency (MHz)	2400~2500	5150~5850
Gain (dBi)	1.64	-2.9

* The antenna 1 is the worst case for final tests.

3.2 Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

By means of test software (QRCT v3.0.252.0) provided by manufacture, the power levels during the tests were set according to the following codes:

Modulation type: GFSK	
Channel	Power Setting
0	Default
19	Default
39	Default

3.3 Test Conditions

Test Conditions	Voltage (Vdc)
V_{normal}	24
$V_{max.}$	26.4 (Note)
$V_{min.}$	21.6 (Note)

Note: After checking the fluctuation of input voltage to the circuit of the radio part (excluding the power supply) of the equipment to be tested, the fluctuation less than $\pm 1\%$ when input voltage from an external supply into the equipment fluctuates $\pm 10\%$, therefore, the test is carried out only at the normal voltage.

3.4 Assembly

The EUT used a kind of particular screw, which could not operated by a tool bought in the market. Only means of brute force will be able to open.

3.5 Antenna Specifications

3.5.1 Antenna Gain






Antenna 1							
Type	Monopole						
Connector	RP-SMA(M)						
Straight position							
Frequency (MHz)	2400	2450	2500	5150	5350	5750	5850
Gain (dBi)	1.04	1.25	0.82	0.85	1.38	0.28	1.04
Bent position 90°							
Frequency (MHz)	2400	2450	2500	5150	5350	5750	5850
Gain (dBi)	1.19	1.57	2.57	0.66	1.03	0.59	1.19

Antenna 2		
Type	Monopole	
Connector	SMA Male Reverse	
Frequency (MHz)	2400~2500	5150~5850
Gain (dBi)	1.64	-2.9

3.5.2 Antenna Pattern


Antenna 1

Straight position

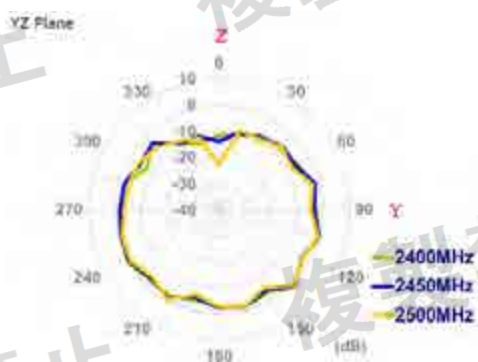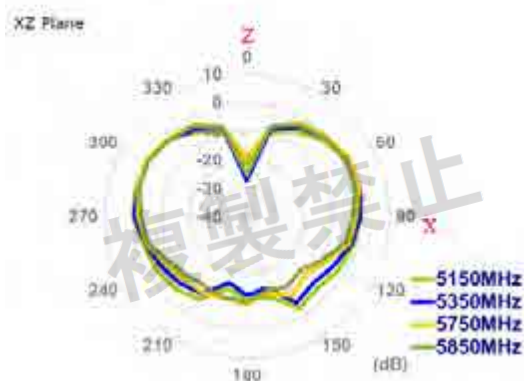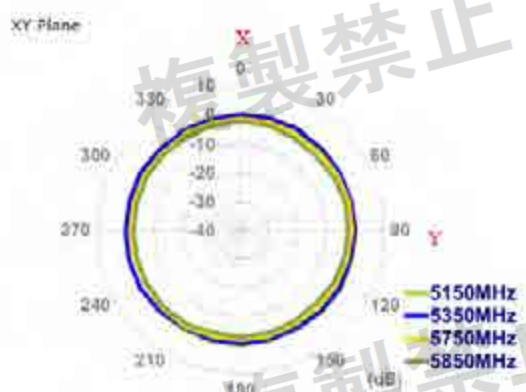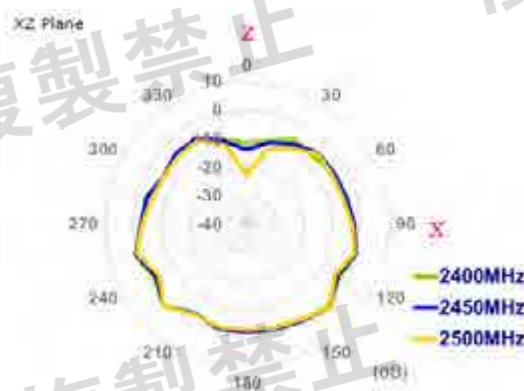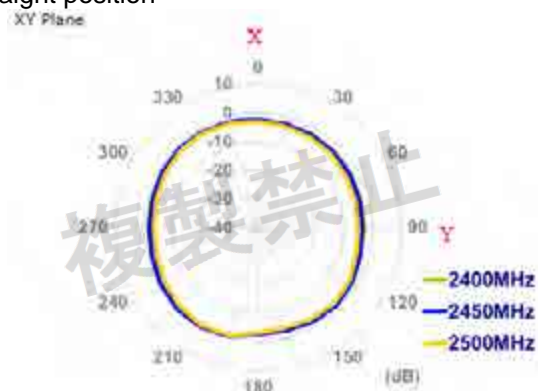


Bent position

XY Plane

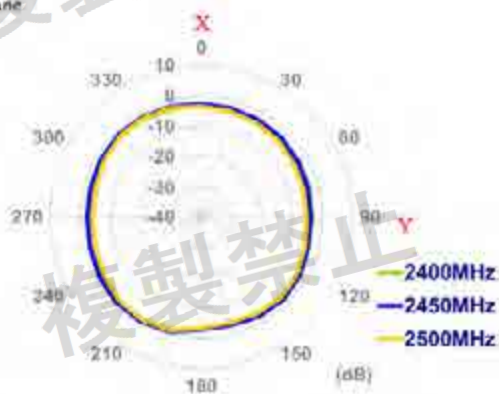


XZ Plane

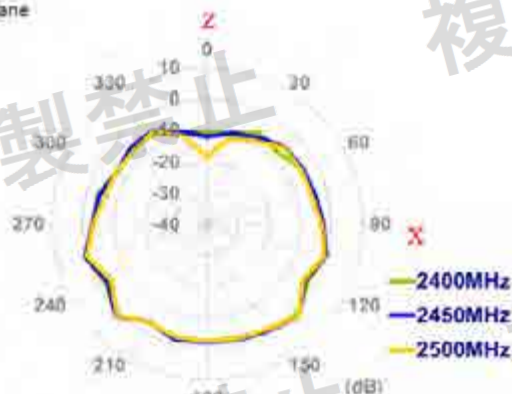


XY Plane



XZ Plane

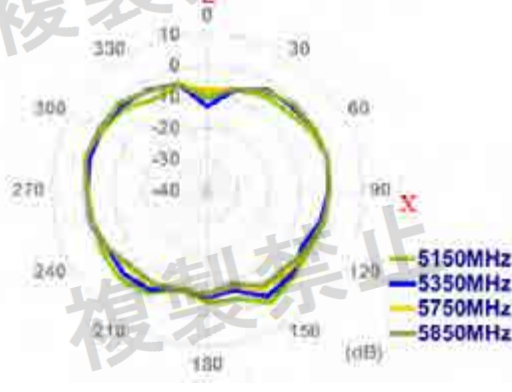


YZ Plane

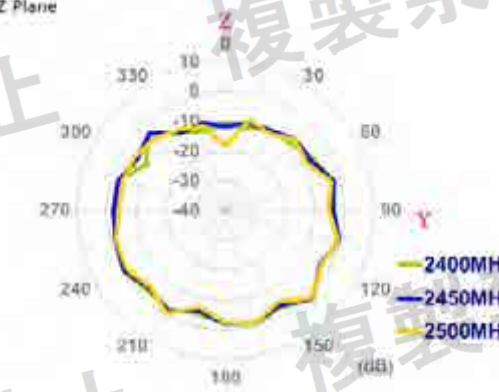

YZ Plane



Antenna 2

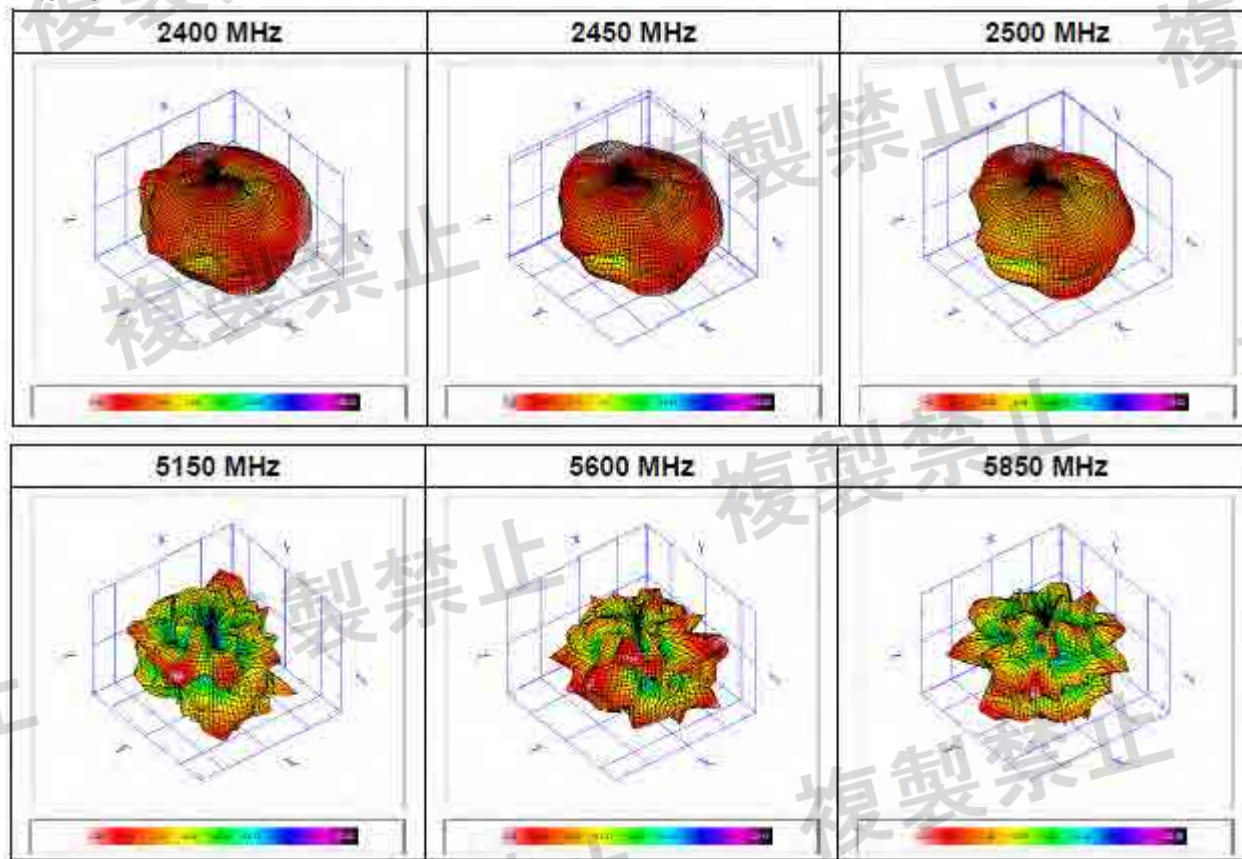



4 Test Results

4.1 Frequency Tolerance Measurement

4.1.1 Limits of Frequency Tolerance Measurement

Tolerance of frequency shall be +/- 50ppm

4.1.2 Test Setup



4.1.3 Test Results


Environmental Conditions		25 deg.C, 68% RH					
Channel	Frequency (MHz)	V _{normal}		V _{max.}		V _{min.}	
		Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)	Carrier frequency (MHz)	Frequency tolerance (ppm)
0	2402	2401.992000	-3.330	2401.992000	-3.330	2401.992000	-3.330
19	2440	2439.992000	-3.278	2439.992000	-3.278	2439.992000	-3.278
39	2480	2479.992000	-3.225	2479.992000	-3.225	2479.992000	-3.225

4.2 Occupied Bandwidth Measurement (99% power bandwidth)

4.2.1 Limits of Occupied Bandwidth Measurement

Item	Limit
Occupied bandwidth	<26MHz

4.2.2 Test Setup

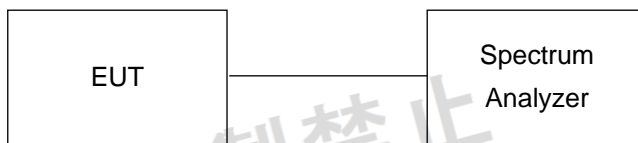


4.2.3 Test Results


Environmental Conditions		25 deg.C, 68% RH		
Channel	Frequency (MHz)	V _{normal}	V _{max.}	V _{min.}
		Occupied Bandwidth (MHz)	Occupied Bandwidth (MHz)	Occupied Bandwidth (MHz)
0	2402	1.36	1.36	1.36
19	2440	1.36	1.36	1.36
39	2480	1.36	1.36	1.36

Note: 1. For the test plots please refer to the below pages.


V_{normal}

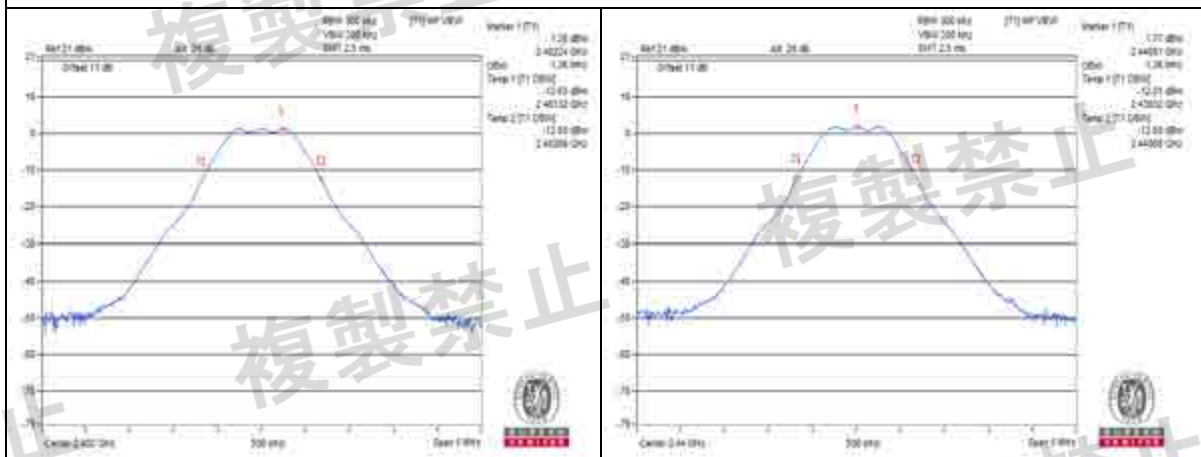

Channel 0

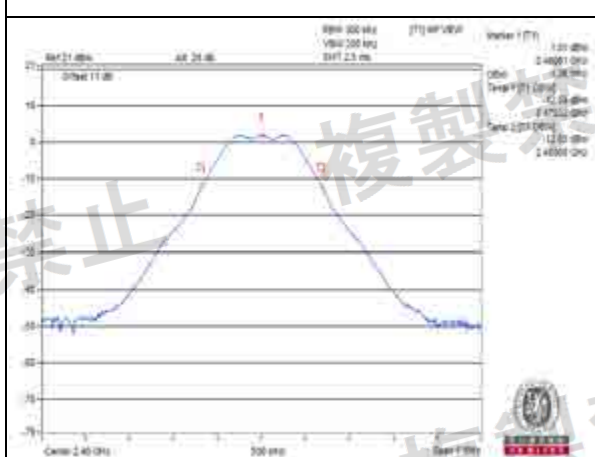


Channel 19

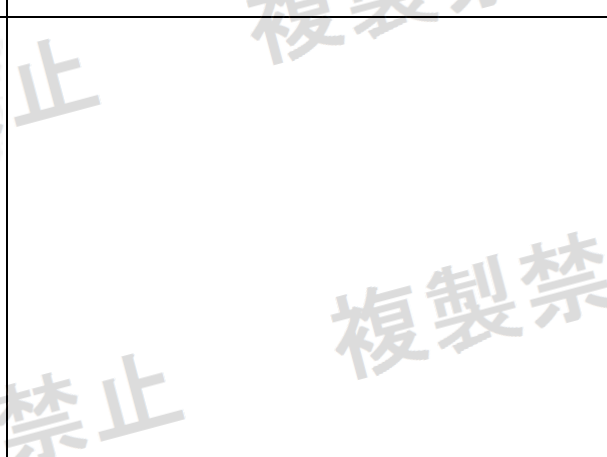


Channel 39

Measurement uncertainty: ± 206.50 Hz


V_{max}.

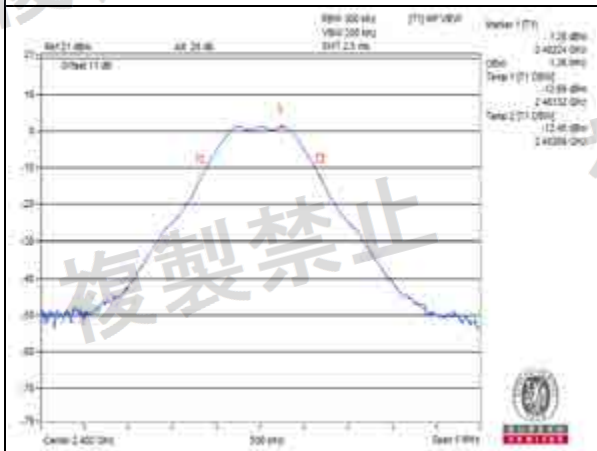

Channel 0

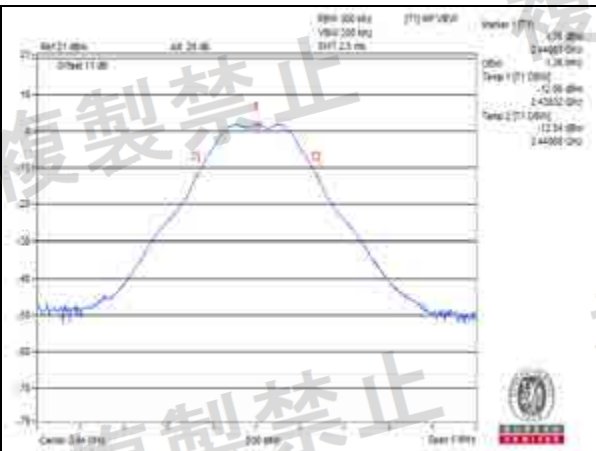


Channel 19

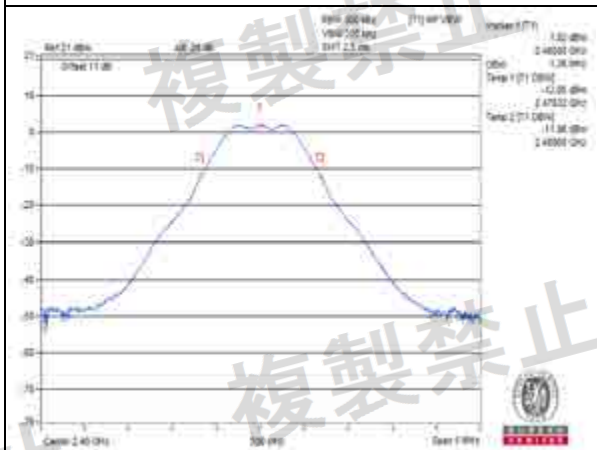


Channel 39

Measurement uncertainty: ± 206.50 Hz


V_{min}.

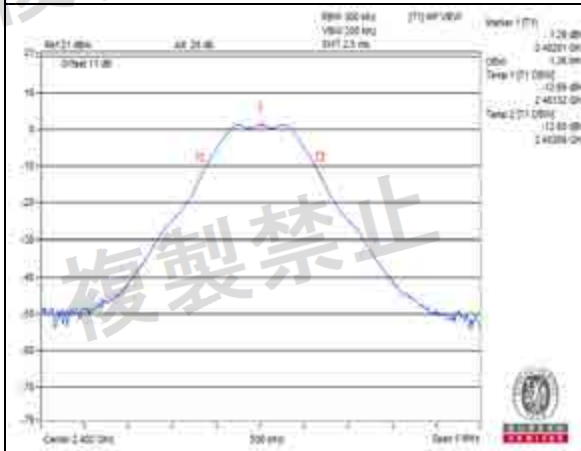

Channel 0

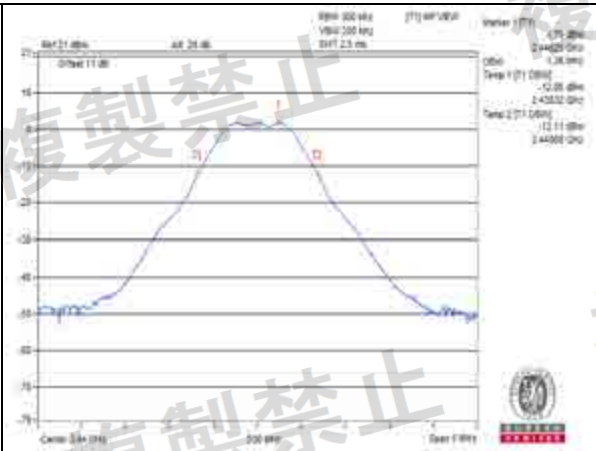

Channel 19

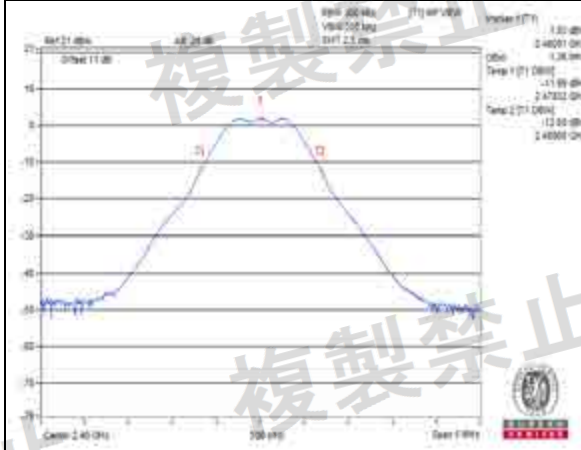

Channel 39


Measurement uncertainty: ± 206.50 Hz

4.3 Spreading Bandwidth Measurement (90% power bandwidth)

4.3.1 Limits of Spreading Bandwidth and Spreading Factor Measurement

Item	Limit	Remark
Spreading Bandwidth	$\geq 500\text{kHz}$	
Spreading Factor	≥ 5	Operating frequency 2400 to 2483.5MHz

4.3.2 Test Setup

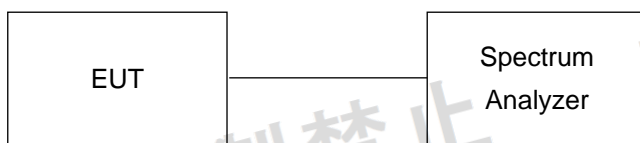

4.3.3 Test Results



Environmental Conditions		25 deg.C, 68% RH					
Channel	Frequency (MHz)	V _{normal}		V _{max.}		V _{min.}	
		Occupied Bandwidth (MHz)	Spreading Factor	Occupied Bandwidth (MHz)	Spreading Factor	Occupied Bandwidth (MHz)	Spreading Factor
0	2402	0.88	14.08	0.89	14.24	0.89	14.24
19	2440	0.88	14.08	0.89	14.24	0.89	14.24
39	2480	0.89	14.24	0.89	14.24	0.89	14.24

Note: 1. For the test plots please refer to the below pages.

2. Spreading Factor: 90% channel power bandwidth / 0.0625




Vnormal

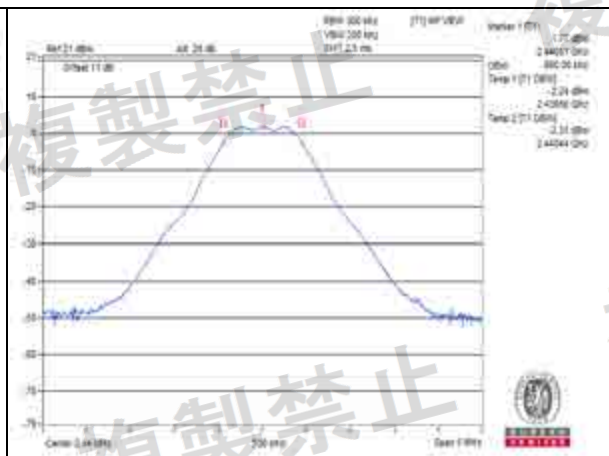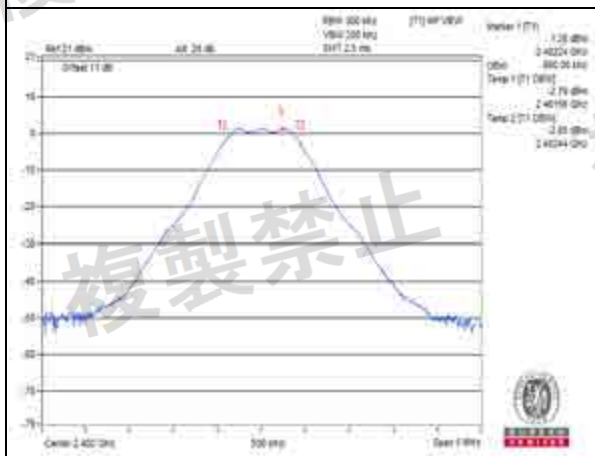

Channel 0

Channel 19

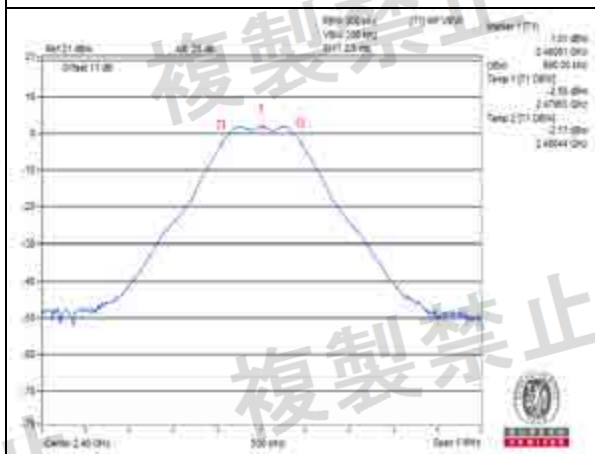


Channel 39


Measurement uncertainty: ± 206.50 Hz




V_{min}.

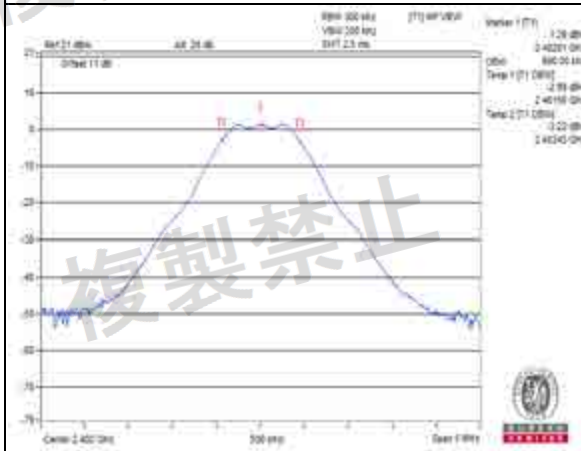

Channel 0

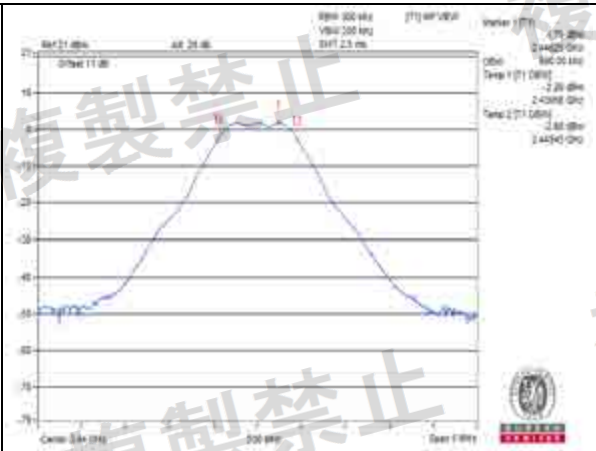

Channel 19

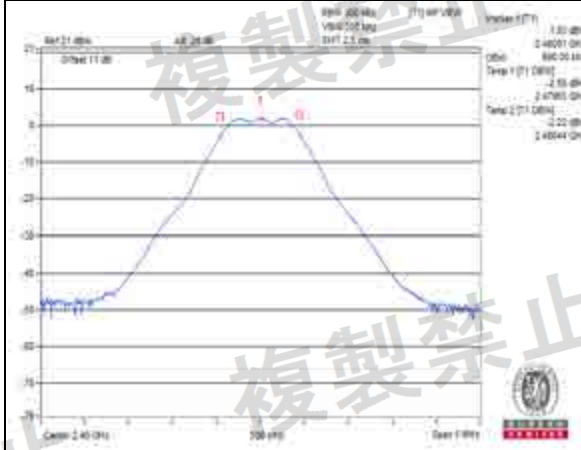

Channel 39

Measurement uncertainty: ± 206.50 Hz



4.4 Spurious Emissions for Transmitter Measurement

4.4.1 Limits of Spurious Emissions

Frequencies (MHz)	Limit
Operating frequency 2400 to 2483.5MHz	
30.0MHz to 1000.0MHz	$\leq 0.25 \text{ uW/100kHz}$
1000.0MHz to 2387MHz	$\leq 2.5 \text{ uW/MHz}$
2387.0MHz to 2400.0MHz	$\leq 25 \text{ uW/MHz}$
2483.5MHz to 2496.5MHz	$\leq 25 \text{ uW/MHz}$
2496.5MHz to 12500.0MHz	$\leq 2.5 \text{ uW/MHz}$

4.4.2 Test Setup





4.4.3 Test Results

Environmental Conditions		25 deg.C, 68% RH					
Test Channel		CH 0 (2402MHz)		CH 19 (2440MHz)		Limit	Result
Test Condition	Frequency Range	Frequency (MHz)	Measured Value (dBm)	Frequency (MHz)	Measured Value (dBm)		
V _{normal}	30.0MHz to 1000.0MHz	95.960	0.01977uW	773.020	0.02023uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2273.260	0.010617uW	2309.320	0.01094uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2400.000	7.870458uW	2396.170	0.007816uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2489.920	0.009462uW	2484.770	0.007998uW	25uW	PASS
	2496.5MHz to 12500.0MHz	4337.140	0.058884uW	9919.090	0.054828uW	2.5uW	PASS
V _{max.}	30.0MHz to 1000.0MHz	301.600	0.019999uW	580.960	0.017338uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2228.880	0.010765uW	2309.320	0.010304uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2400.000	7.906786uW	2392.350	0.00811uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2489.760	0.008933uW	2488.380	0.007745uW	25uW	PASS
	2496.5MHz to 12500.0MHz	3016.680	0.052uW	8158.480	0.053703uW	2.5uW	PASS
V _{min.}	30.0MHz to 1000.0MHz	35.820	0.019999uW	986.420	0.021627uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2273.260	0.010814uW	2309.320	0.013804uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2400.000	7.834296uW	2387.410	0.008035uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2492.650	0.009268uW	2489.940	0.008017uW	25uW	PASS
	2496.5MHz to 12500.0MHz	3016.680	0.048641uW	9258.860	0.054954uW	2.5uW	PASS


Note: The worst value in each frequency range v.s. each channel has been marked by boldface.



Environmental Conditions		25 deg.C, 68% RH			
Test Channel		CH 39 (2480MHz)		Limit	Result
Test Condition	Frequency Range	Frequency (MHz)	Measured Value (dBm)		
V _{normal}	30.0MHz to 1000.0MHz	452.920	0.018072uW	0.25uW	PASS
	1000.0MHz to 2387MHz	1754.520	0.012503uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2387.280	0.008851uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2483.500	0.238232uW	25uW	PASS
	2496.5MHz to 12500.0MHz	7718.320	0.049774uW	2.5uW	PASS
V _{max.}	30.0MHz to 1000.0MHz	86.260	0.016331uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2348.160	0.012503uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2390.820	0.007834uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2483.500	0.241546uW	25uW	PASS
	2496.5MHz to 12500.0MHz	3016.680	0.061235uW	2.5uW	PASS
V _{min.}	30.0MHz to 1000.0MHz	454.860	0.017947uW	0.25uW	PASS
	1000.0MHz to 2387MHz	2350.930	0.010889uW	2.5uW	PASS
	2387.0MHz to 2400.0MHz	2392.510	0.007962uW	25uW	PASS
	2483.5MHz to 2496.5MHz	2483.500	0.249459uW	25uW	PASS
	2496.5MHz to 12500.0MHz	3016.680	0.044978uW	2.5uW	PASS


Note: 1. The worst value in each frequency range v.s. each channel has been marked by boldface.

Vnormal
Channel 0

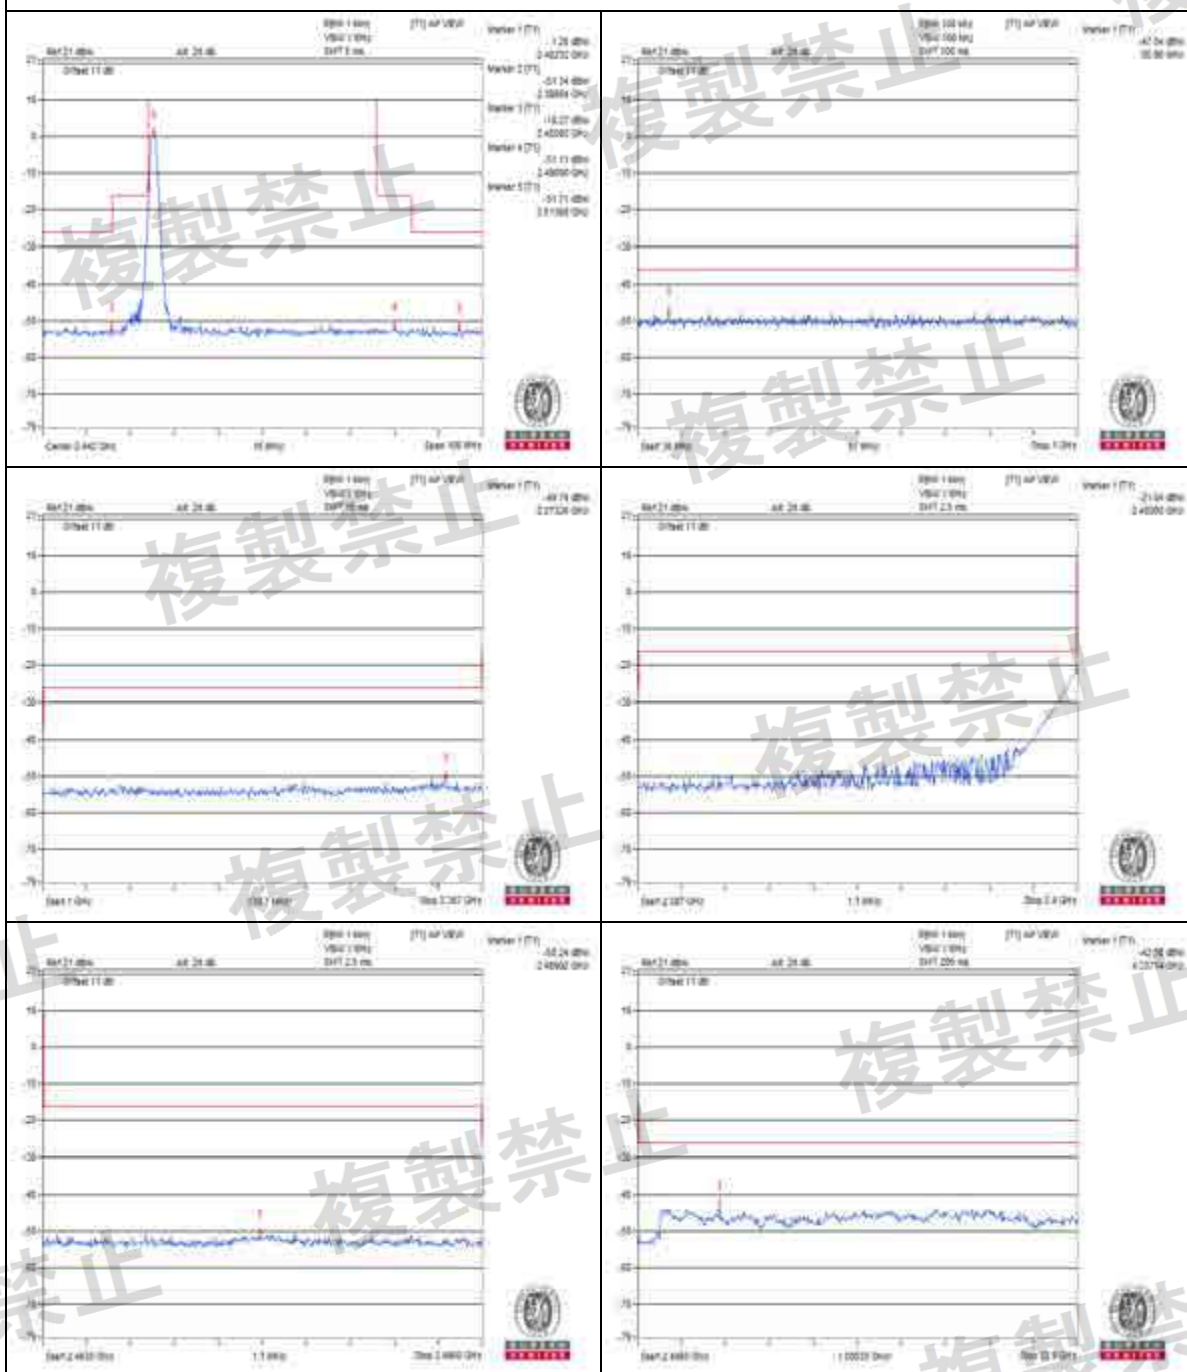


Measurement uncertainty: $\pm 3.93\text{dB}$

Vnormal
Channel 19

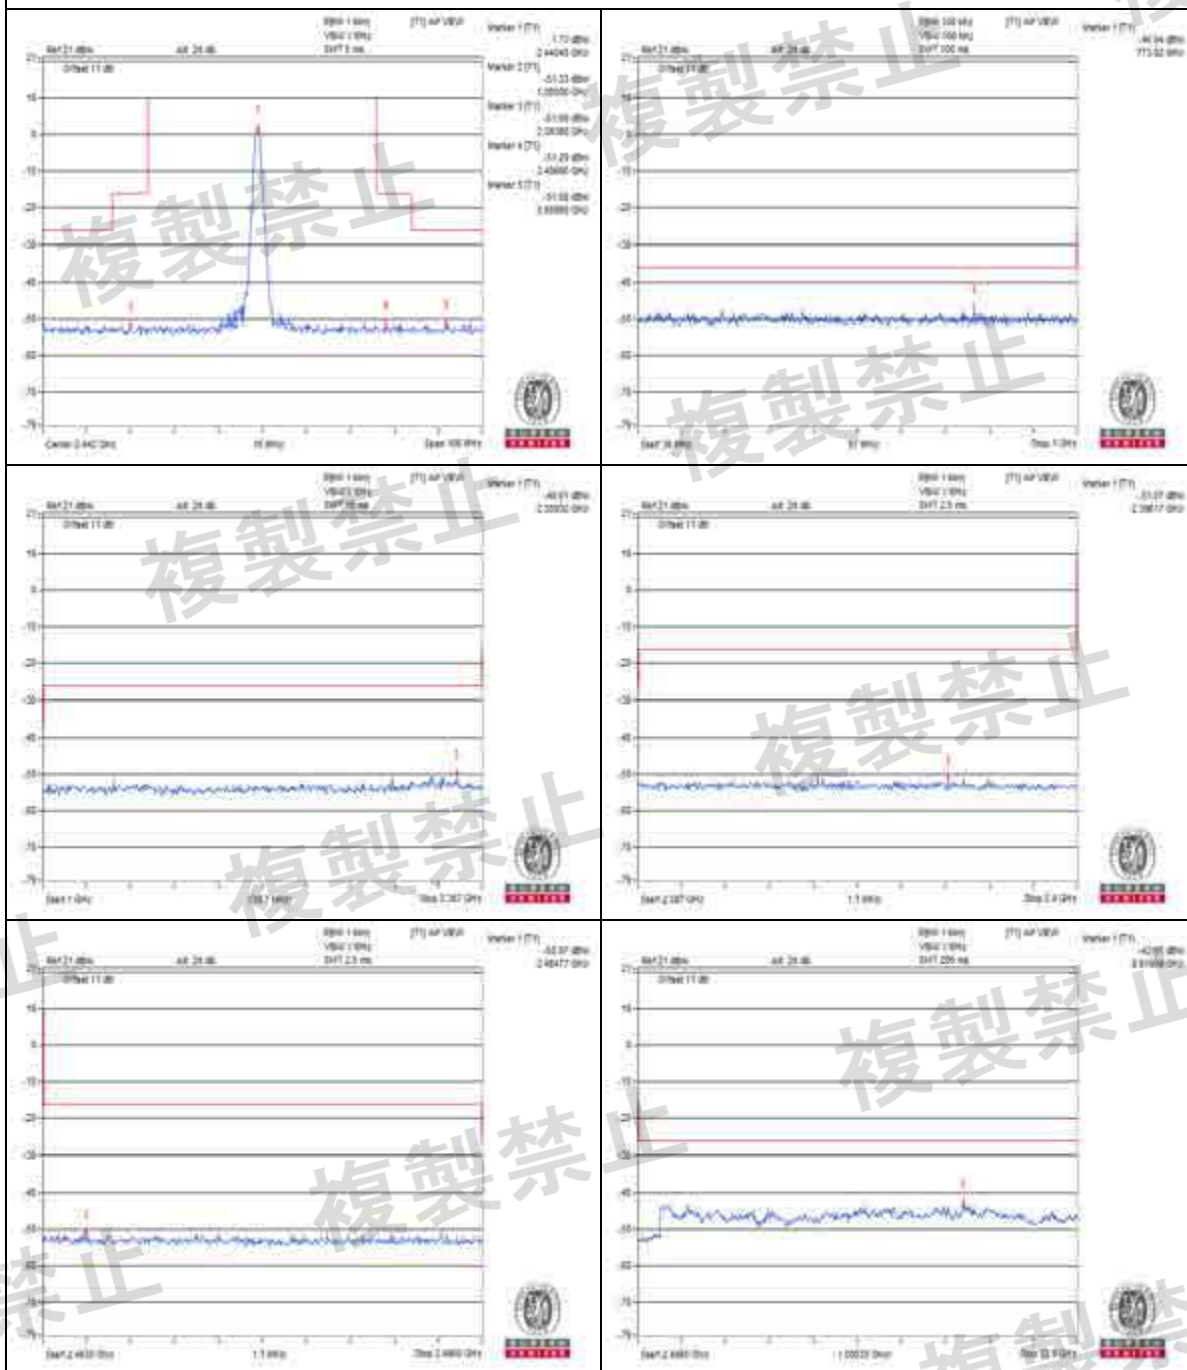


Measurement uncertainty: $\pm 3.93\text{dB}$

Vnormal
Channel 39

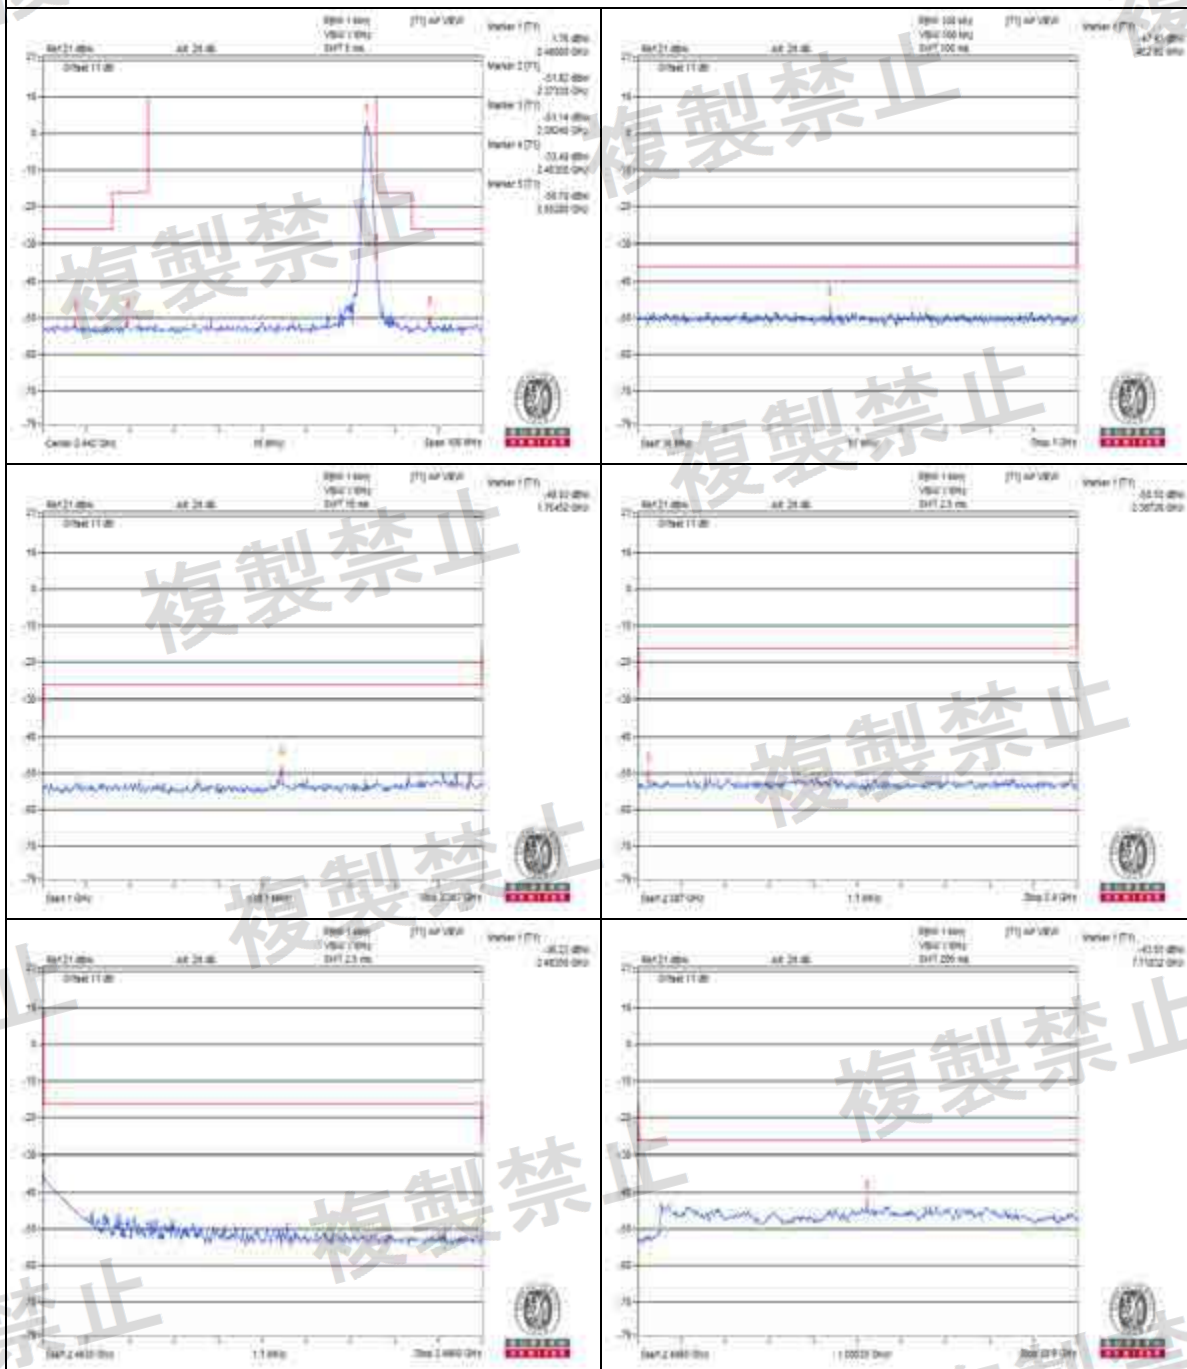


Measurement uncertainty: $\pm 3.93\text{dB}$

V_{max}
Channel 0

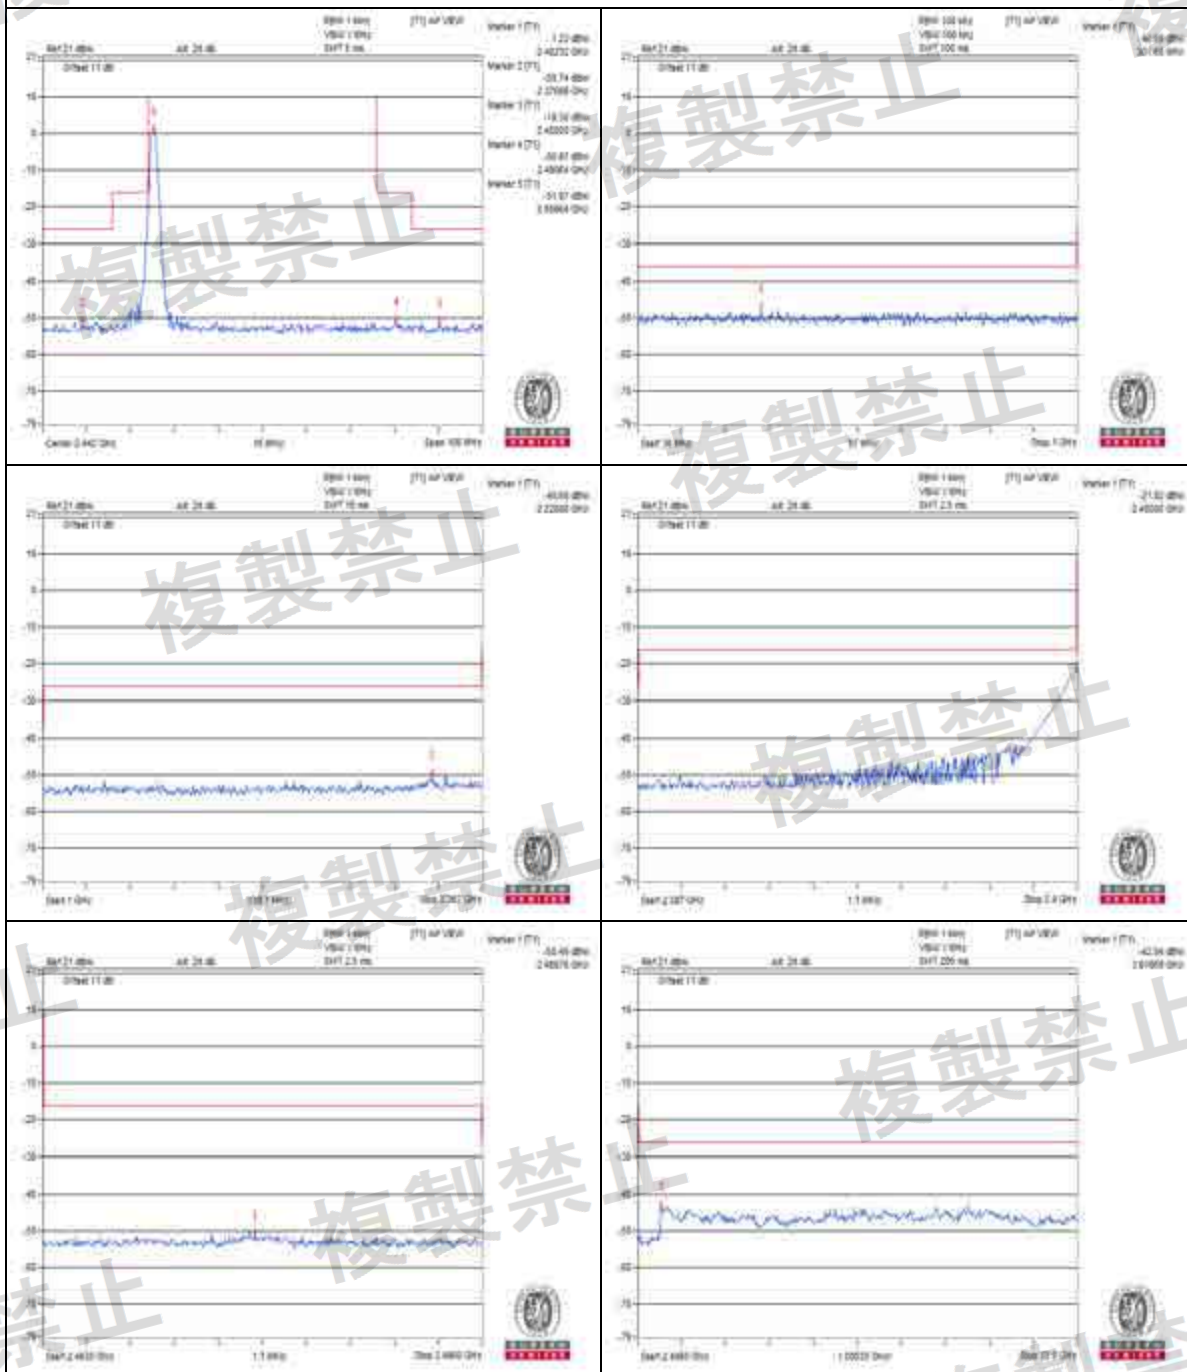


Measurement uncertainty: $\pm 3.93\text{dB}$

V_{max}.
Channel 19

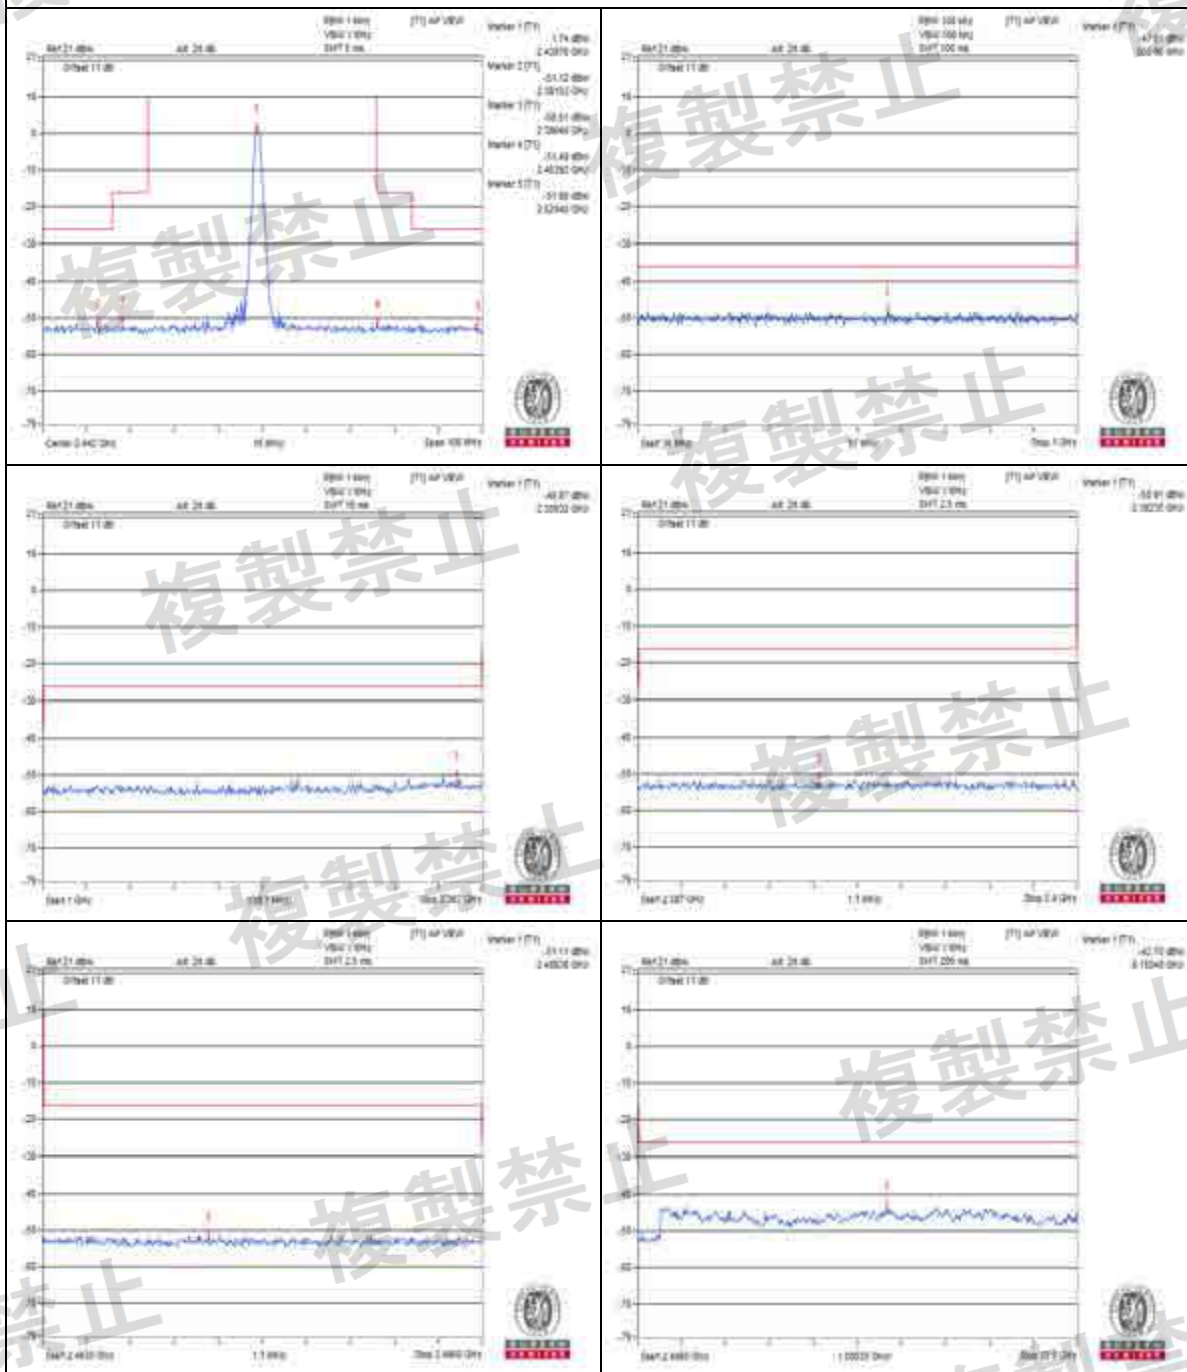




V_{max}
Channel 39

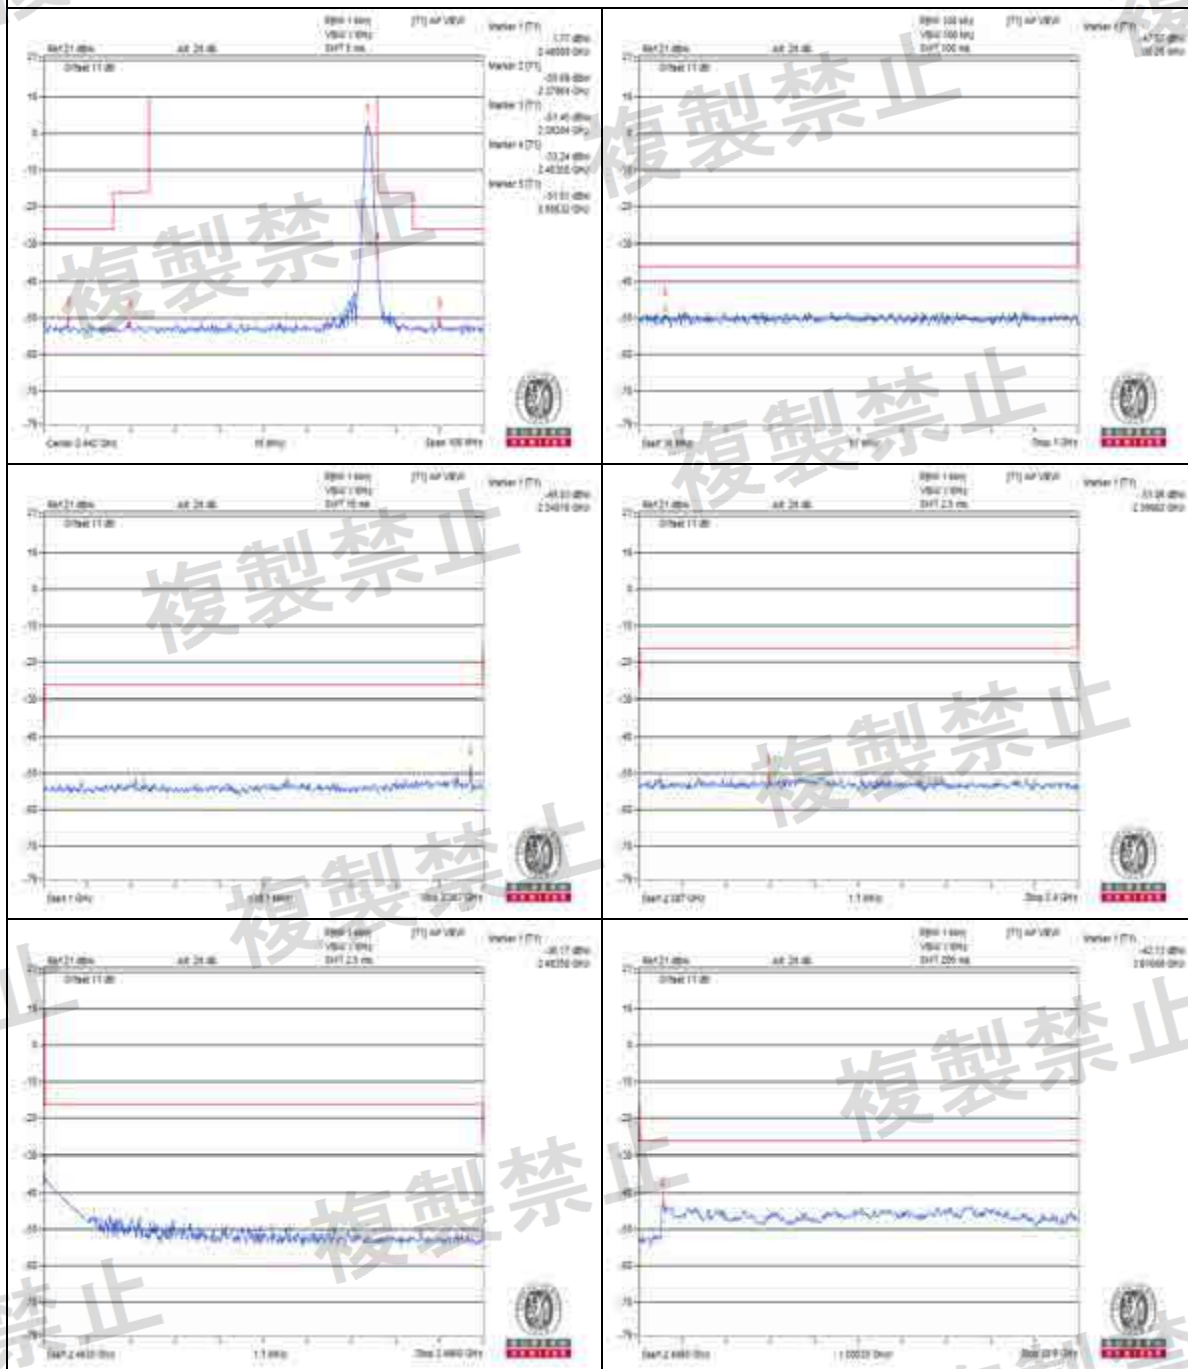

Measurement uncertainty: $\pm 3.93\text{dB}$

V_{min}.
Channel 0

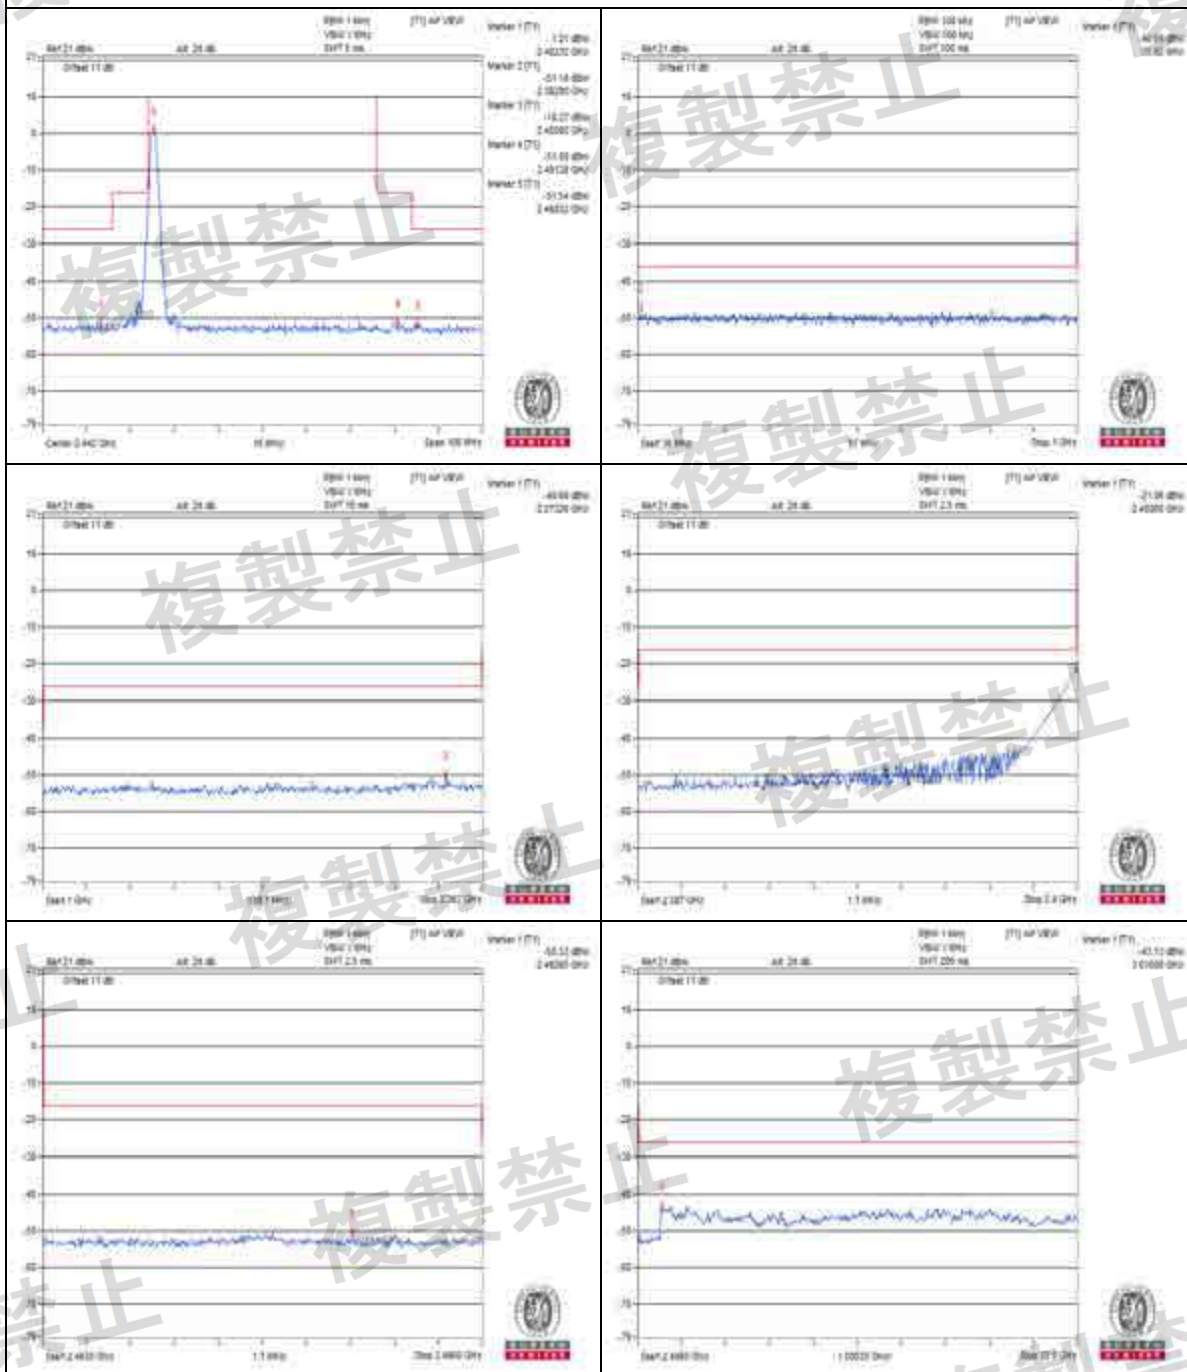


Measurement uncertainty: $\pm 3.93\text{dB}$

V_{min}.
Channel 19



Measurement uncertainty: $\pm 3.93\text{dB}$

V_{min}
Channel 39

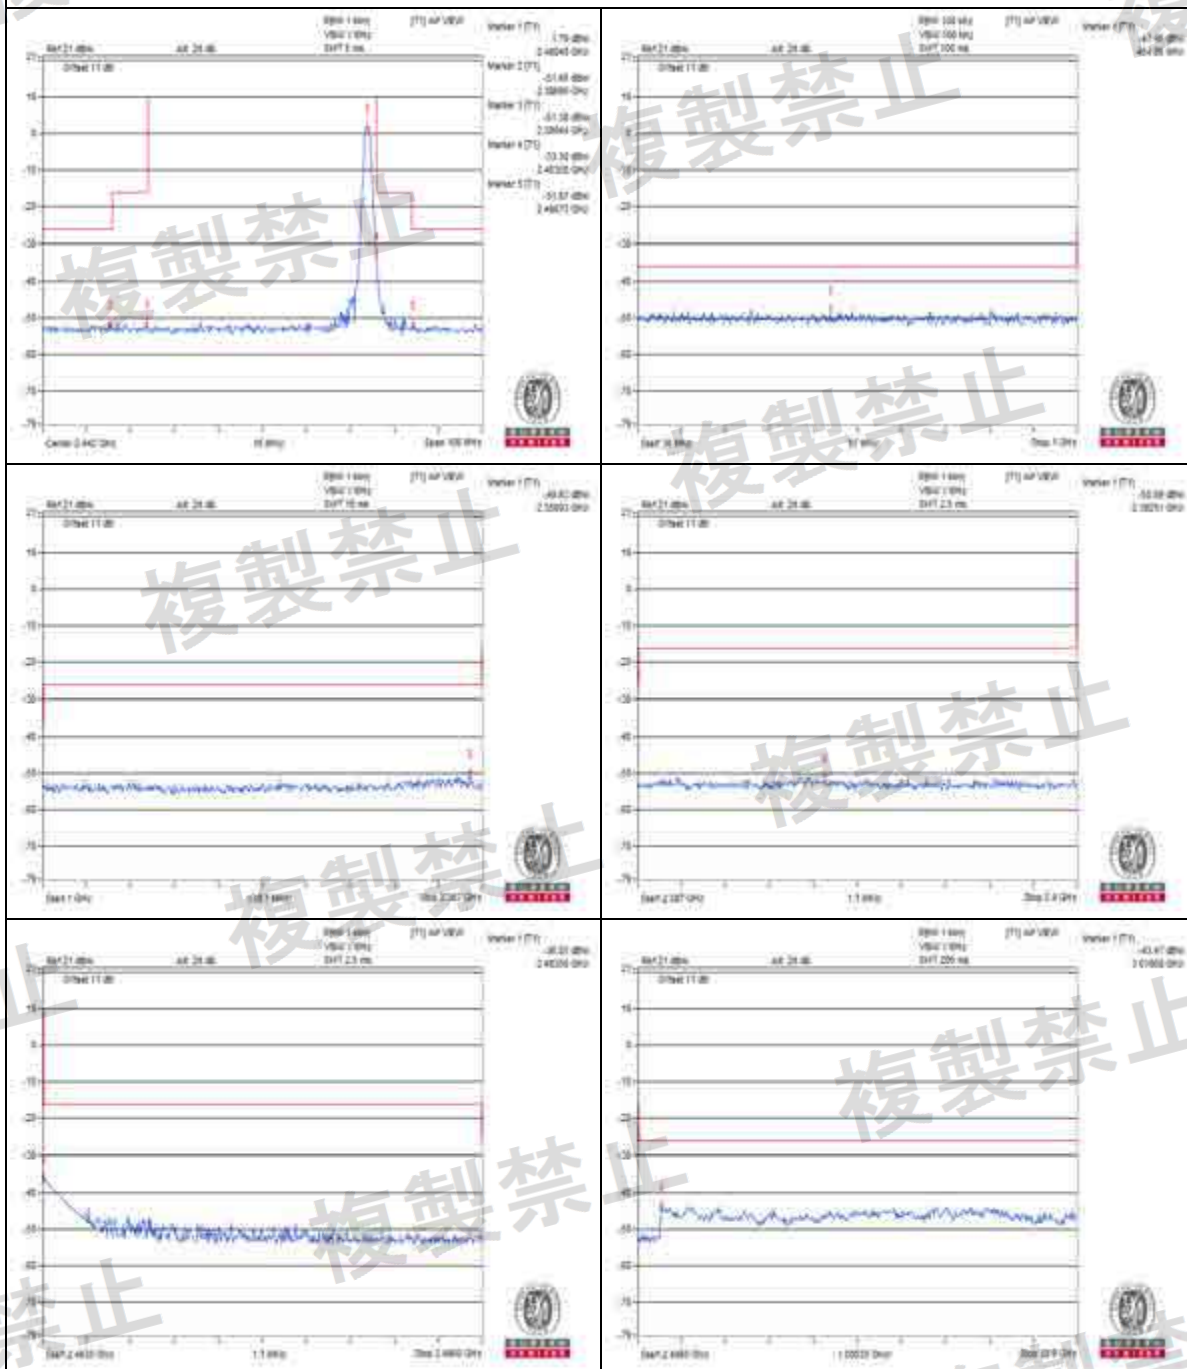

Measurement uncertainty: $\pm 3.93\text{dB}$

4.5 Antenna Power Measurement


4.5.1 Limits of Antenna Power

Modulation System	Frequency Band Used	Antenna Power (Max.)	EIRP (Max.)	
			Omni-Directional Case	Directional Case
DS	2400 – 2483.5 MHz	10 mW/MHz	12.14 dBm/MHz (16.368 mW/MHz)	22.14 dBm/MHz (163.68 mW/MHz)
OFDM (Note 1)	2400 – 2483.5 MHz	10 mW/MHz	12.14 dBm/MHz (16.368 mW/MHz)	22.14 dBm/MHz (163.68 mW/MHz)
OFDM (Note 2)	2400 – 2483.5 MHz	5 mW/MHz	9.14 dBm/MHz (8.20 mW/MHz)	19.14 dBm/MHz (82.03 mW/MHz)
Other than the above	2400 – 2483.5 MHz	10 mW	12.14 dBm	22.14 dBm

Note:

1. Occupied bandwidth is less than 26MHz
2. Occupied bandwidth is more than 26MHz and less than 38MHz
3. The half-power beam width for directional antenna shall be $360/A$ degrees or less, where A is a ratio which causes the EIRP concerned to exceed the omnidirectional EIRP upper limit.
4. Tolerance of antenna power shall be +20% (upper value) and -80% (lower value).

4.5.2 Test Setup

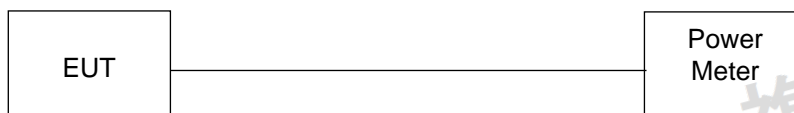



4.5.3 Test Results

Environmental Conditions		25 deg.C, 68% RH			
Channel Number	Frequency (MHz)	Conducted RF Output Power Density (mW)			
		Normal Voltage	Max. Voltage	Min. Voltage	Max. Limit (mW/MHz)
		24Vdc	26.4Vdc	21.6Vdc	
0	2402	1.393	1.387	1.361	10
19	2440	1.556	1.524	1.500	10
39	2480	1.607	1.663	1.538	10
Rated power		4mW			
Tolerance of antenna power		0.8mW ~ 4.8mW			
Measurement uncertainty		± 1.11dB			

Monopole antenna with 2.57dBi gain

Environmental Conditions		25 deg.C, 68% RH			
Channel Number	Frequency (MHz)	Radiated RF Output Power Density (mW)			
		Normal Voltage	Max. Voltage	Min. Voltage	Max. Limit (mW/MHz)
		24Vdc	26.4Vdc	21.6Vdc	
0	2402	2.517	2.507	2.46	16.368
19	2440	2.812	2.754	2.711	16.368
39	2480	2.904	3.005	2.779	16.368
Measurement uncertainty		± 1.11dB			

Note: The value of radiated RF output densities are "calculated" values.



4.6 Spurious Emissions for Receiver

4.6.1 Limits of Spurious Emissions for Receiver

Frequencies (MHz)	Limit
Below 1GHz	$\leq 4\text{nW}$ (-54dBm)
Above 1GHz	$\leq 20\text{nW}$ (-47dBm)

4.6.2 Test Setup




4.6.3 Test Result


Environmental Conditions		25 deg.C, 68% RH					
Test Channel		CH0 (2402MHz)		CH19 (2440MHz)		Limit	Result
Test Condition	Frequency Range	Frequency (MHz)	Measured Value (dBm)	Frequency (MHz)	Measured Value (dBm)		
V _{normal}	Below 1GHz	640.370	0.023121nW	760.160	0.02208nW	4nW/100kHz	PASS
	Above 1GHz	3150.500	0.58479nW	9294.370	0.450817nW	20nW/MHz	PASS
V _{max.}	Below 1GHz	943.490	0.021827nW	815.940	0.025351nW	4nW/100kHz	PASS
	Above 1GHz	10464.500	0.562341nW	3009.620	0.5188nW	20nW/MHz	PASS
V _{min.}	Below 1GHz	861.040	0.023659nW	845.770	0.021478nW	4nW/100kHz	PASS
	Above 1GHz	3024.000	0.508159nW	3006.750	0.592925nW	20nW/MHz	PASS
Test Channel		CH39(2480MHz)				Limit	Result
Test Condition	Frequency Range	Frequency (MHz)		Measured Value (dBm)			
V _{normal}	Below 1GHz	211.140		0.024155nW		4nW/100kHz	PASS
	Above 1GHz	3038.370		0.476431nW		20nW/MHz	PASS
V _{max.}	Below 1GHz	840.190		0.02851nW		4nW/100kHz	PASS
	Above 1GHz	8325.500		0.479733nW		20nW/MHz	PASS
V _{min.}	Below 1GHz	69.520		0.022182nW		4nW/100kHz	PASS
	Above 1GHz	3001.000		0.639735nW		20nW/MHz	PASS

- Note: 1. The worst value in each frequency range v.s. each channel has been marked by boldface.
2. The spectrum plots are attached on the following pages.


Vnormal

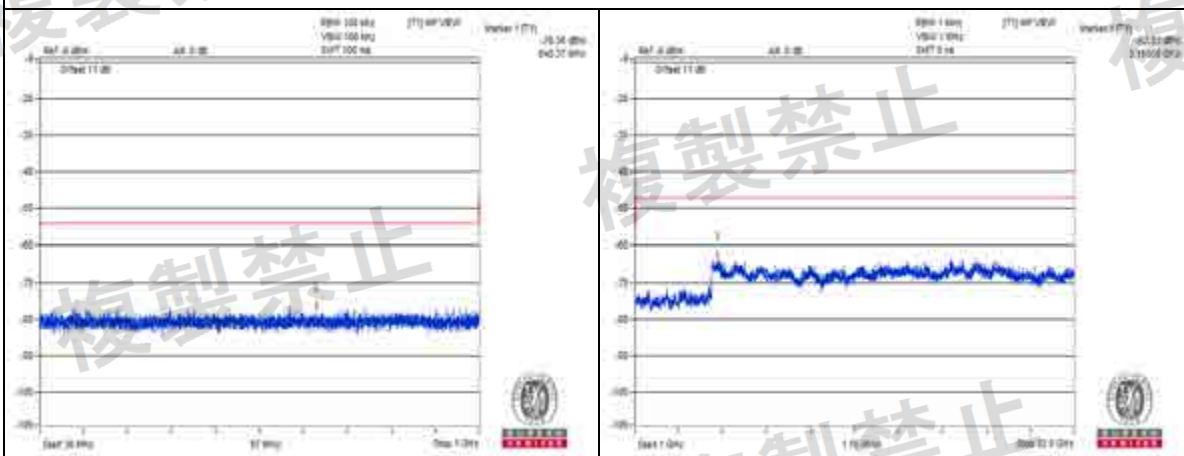

Channel 0

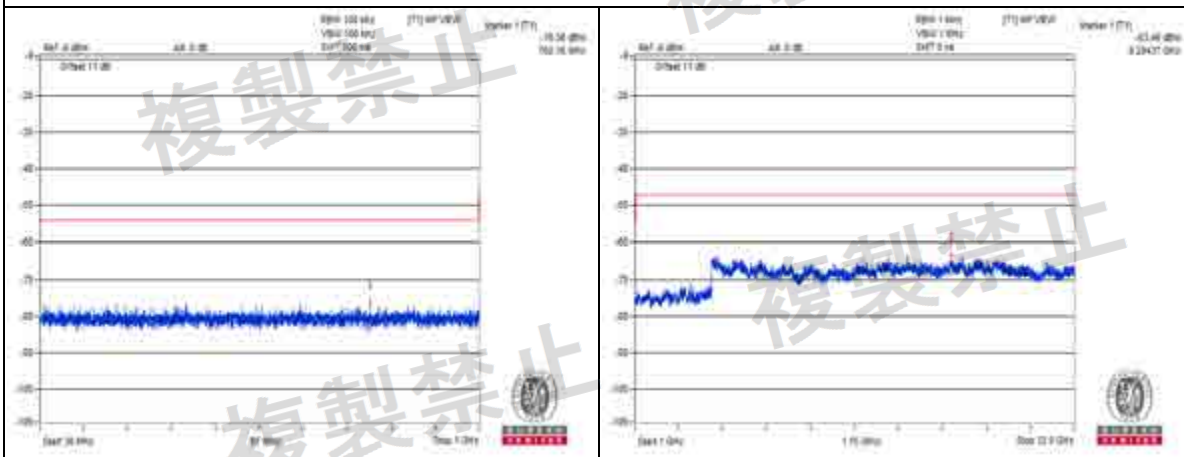


Channel 19

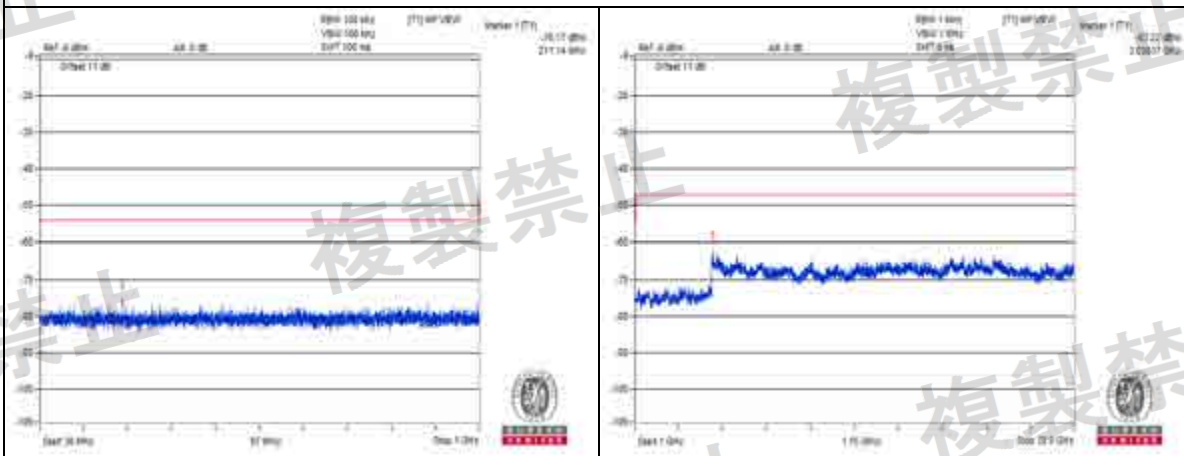


Channel 39

Measurement uncertainty: $\pm 3.93\text{dB}$


Vmax.

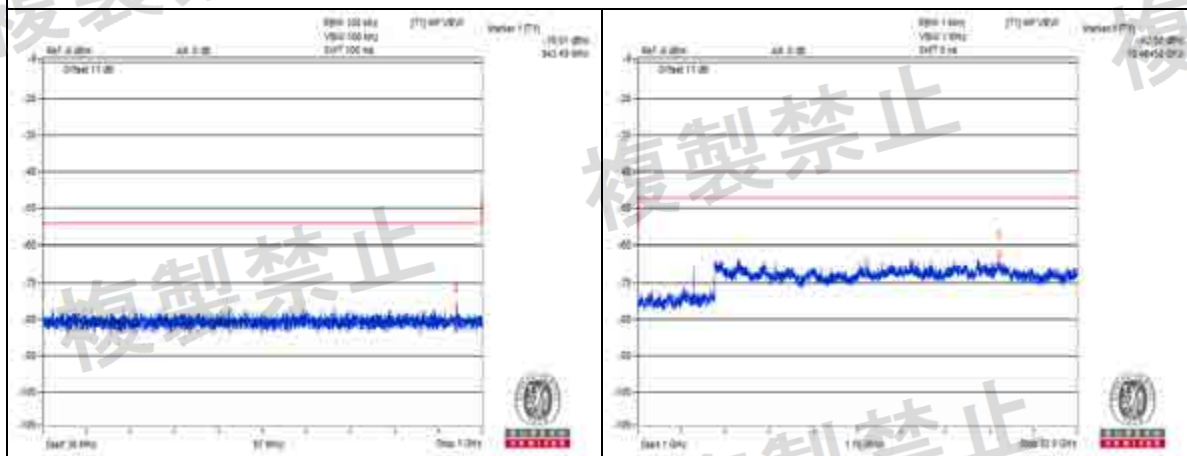

Channel 0

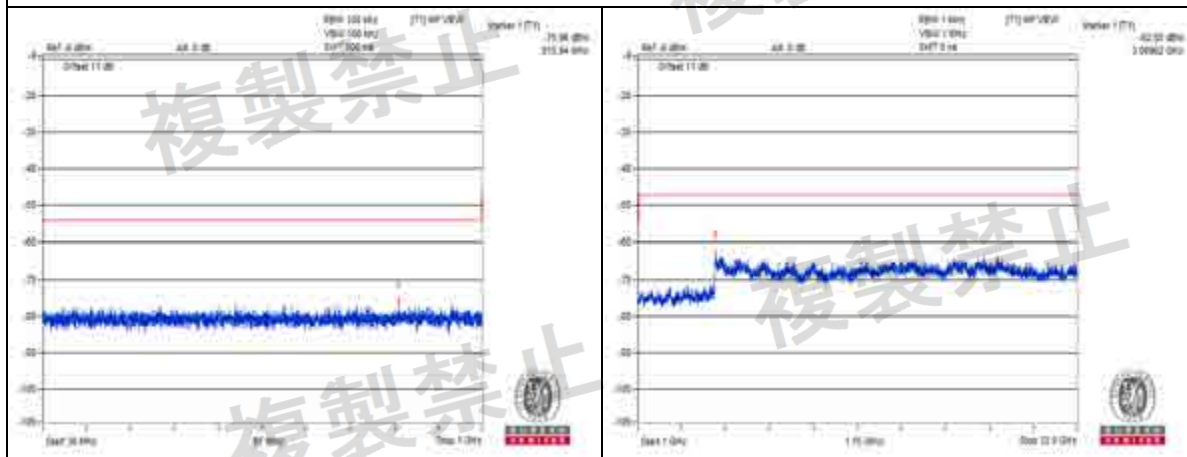


Channel 19

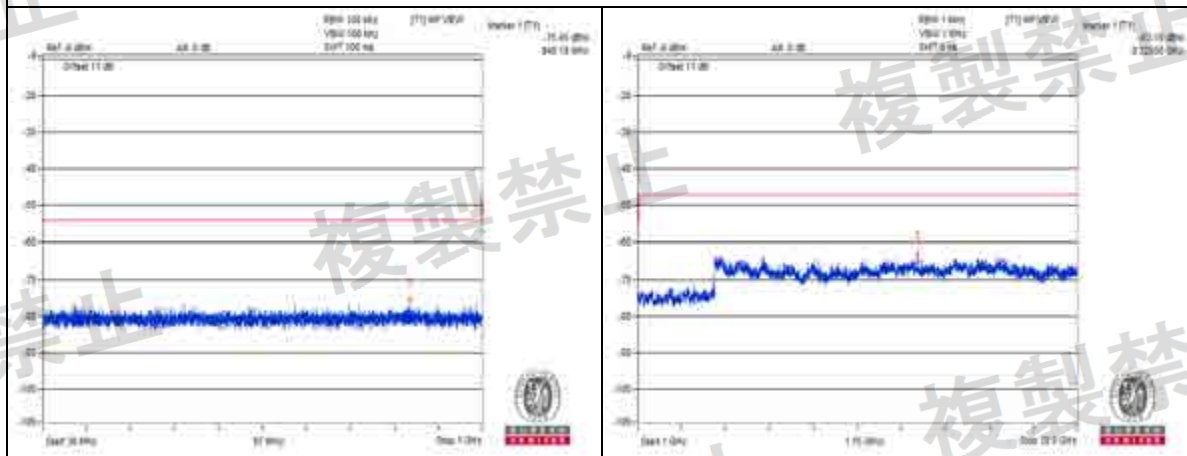


Channel 39

Measurement uncertainty: $\pm 3.93\text{dB}$


V_{min}.

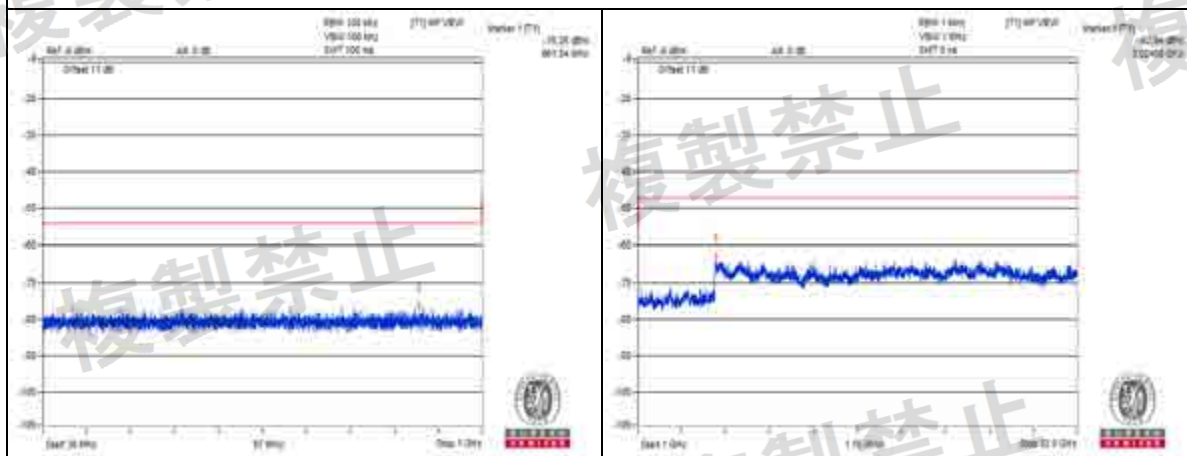

Channel 0

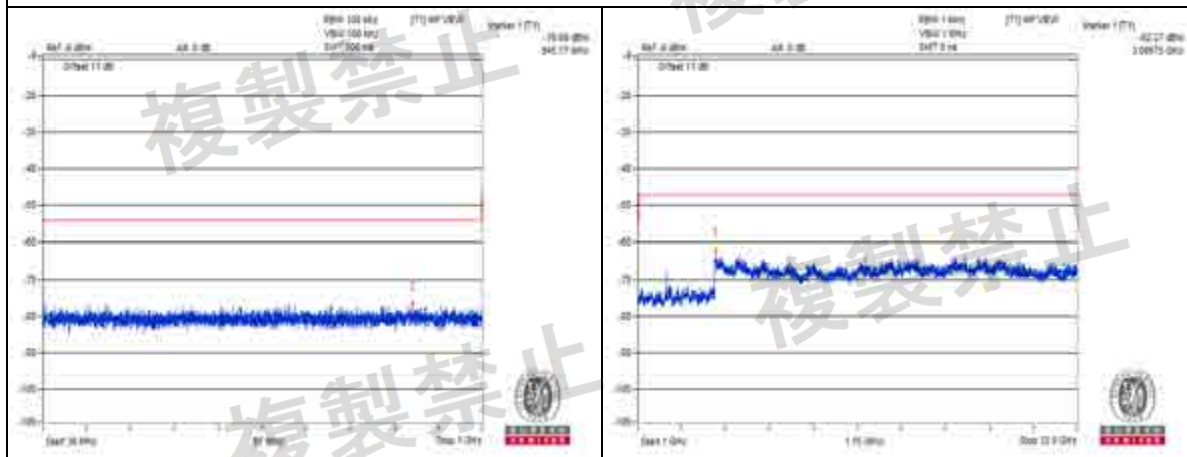

Channel 19

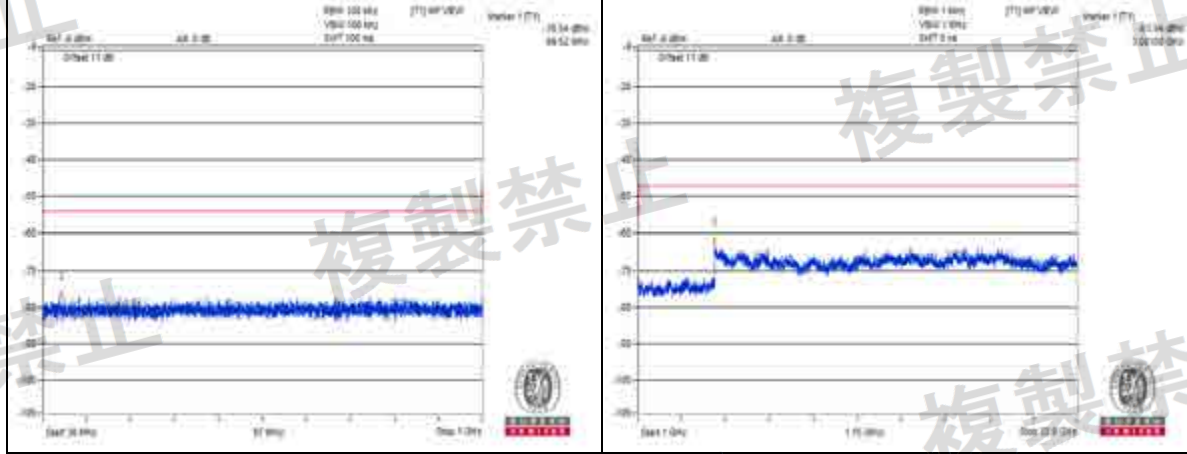

Channel 39

Measurement uncertainty: $\pm 3.93\text{dB}$




4.7 Interference Prevention Function

4.7.1 Limits of Interference Prevention Function

Radio equipment used mainly on the same premises and automatically transmits or receives identification code.

4.7.2 Test Setup

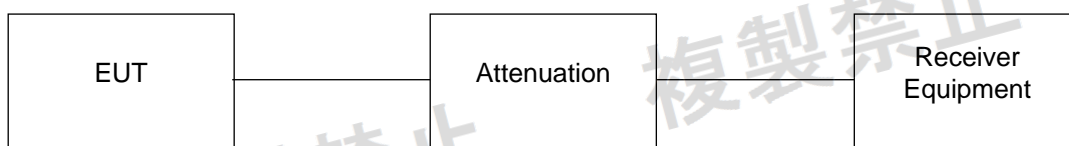

4.7.3 Test Results

ENVIRONMENTAL CONDITIONS	25 deg.C, 68% RH
Link Mode	Test Result
Bluetooth LE	Pass

5 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration	Calibration Authority	Cal. Method
Spectrum Analyzer / Rohde & Schwarz	FSV40	100980	Apr. 17, 2018	Apr. 16, 2019	Electronics Testing Center, Taiwan	c)
Signal Generator / Agilent	E4438C	MY45094468	Nov. 26, 2017	Nov. 25, 2018	Electronics Testing Center, Taiwan	c)
Power Meter / Anritsu	ML2495A	1232003	Dec. 29, 2017	Dec. 28, 2018	Electronics Testing Center, Taiwan	c)
Power Sensor / Anritsu	MA2411B	1207333	Dec. 28, 2017	Dec. 27, 2018	Electronics Testing Center, Taiwan	c)
DC Power Supply / Topward	6306A	727263	NA	NA	NA	d)

NOTE: Calibration Method

a) : Calibration conducted by the National Institute of Information and Communications Technology~NICT~ or a designated calibration agency under Article 102-18 paragraph (1)~ TELEC EngineeringCenter, Intertek Japan K.K., Keysight Technologies, Inc~.

b) : Correction conducted pursuant to the provisions of Article 135 or Article 144 of the MeasurementLaw (Law No. 51 of 1992)~Japan Calibration Service Syste~

c) : Calibration conducted in foreign countries, which shall be equivalent to the calibration conducted bythe NICT or a designated calibration agency under Article 102-18 paragraph (1)~ TELEC EngineeringCenter, Intertek Japan K.K., Keysight Technologies, Inc~.

d) : Calibration conducted by using other equipment that listed above from a) to c)

6 Photographs of the Test Configuration





Appendix - Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---