

## RADIO TEST REPORT

For

WGSoft.de, Wladimir Gurskij

UniCarScan

Test Model: UCSI-2100

Prepared for : WGSoft.de, Wladimir Gurskij  
Address : Wagnerstr. 18, 32257 Buende, Germany

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C, Juji  
Industrial Park, Yabianxueziwei, Shajing Street, Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 12, 2021  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : May 12, 2021 ~ May 28, 2021  
Date of Report : May 29, 2021

**RADIO TEST REPORT****MIC Notice No.88 Appendix No. 43**

Second-Generation Low-Power Data Communication System/Wireless LAN System

**Report Reference No.** ..... : **LCS210510091AEA**

Date of Issue..... : May 29, 2021

**Testing Laboratory Name** ..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name** ..... : **WGSoft.de, Wladimir Gurskij**

Address..... : Wagnerstr. 18, 32257 Buende, Germany

**Test Specification**

Standard..... : MIC Notice No.88 Appendix No.43

**Test Report Form No.** ..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03


**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description**..... : **UniCarScan**Trade Mark..... : **UniCarScan®**

Test Model..... : UCSI-2100

Ratings..... : 9-16V, 55mA

Result ..... : **Positive****Compiled by:****Supervised by:****Approved by:**




Ray Yang/ Administrators

Jin Wang/ Technique principal

Gavin Liang/ Manager

# RADIO -- TEST REPORT

<b>Test Report No. : LCS210510091AEA</b>	<u>May 29, 2021</u> Date of issue
--	--------------------------------------

Test Model..... : UCSI-2100  EUT..... : UniCarScan
<b>Applicant..... : WGSofT.de, Wladimir Gurskij</b> Address..... : Wagnerstr. 18, 32257 Buende, Germany Telephone..... : / Fax..... : /
<b>Manufacturer..... : WGSofT.de, Wladimir Gurskij</b> Address..... : Wagnerstr. 18, 32257 Buende, Germany Telephone..... : / Fax..... : /
<b>Factory..... : WGSofT.de, Wladimir Gurskij</b> Address..... : Wagnerstr. 18, 32257 Buende, Germany Telephone..... : / Fax..... : /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

Revision	Issue Date	Revisions	Revised By
000	May 29, 2021	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	7
1.3. EXTERNAL I/O CABLE .....	7
1.4. DESCRIPTION OF TEST FACILITY .....	7
1.5. TEST CONDITIONS .....	7
1.6. FREQUENCY OF CHANNELS .....	7
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1. EUT EXERCISE .....	8
2.2. MEASUREMENT UNCERTAINTY .....	8
2.3. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING .....	8
2.4. DESCRIPTION OF TEST MODES .....	8
2.5. TEST VOLTAGE .....	9
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
3.1. JUSTIFICATION .....	10
3.2. EUT EXERCISE SOFTWARE .....	10
3.3. SPECIAL ACCESSORIES .....	10
3.4. BLOCK DIAGRAM/SCHEMATICS .....	10
3.5. EQUIPMENT MODIFICATIONS .....	10
<b>4. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>5. TEST RESULT .....</b>	<b>12</b>
5.1. ANTENNA POWER .....	12
5.2. FREQUENCY TOLERANCE .....	13
5.3. OCCUPIED FREQUENCY BANDWIDTH .....	14
5.4. SPREAD BANDWIDTH .....	15
5.5. TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED) .....	16
5.6. CARRIER SENSING FUNCTION .....	17
5.7. INTERFERENCE PREVENTION FUNCTION .....	18
5.8. SECONDARY RADIATED EMISSIONS .....	19
<b>6. PHOTOGRAPHS OF TEST SETUP .....</b>	<b>20</b>
<b>7. EXTERNAL PHOTOGRAPHS OF THE EUT .....</b>	<b>20</b>
<b>8. INTERNAL PHOTOGRAPHS OF THE EUT .....</b>	<b>20</b>
<b>9. LIST OF MEASURING EQUIPMENTS .....</b>	<b>20</b>

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : UniCarScan  
Test Model : UCSI-2100  
Power Supply : 9-16V, 55mA  
Hardware Version : V1.1  
Software Version : V1.5

#### Bluetooth

Frequency Range : 2402-2480MHz for Bluetooth  
40 channels for Bluetooth V4.2(BT LE)  
Channel Frequency=2402+2(K-1), K=1, 2, 3 .....40  
Declared Antenna Power : Bluetooth V4.2(BT LE): 2.5mW  
Modulation Technology : Bluetooth V4.2(BT LE): GFSK  
Data Rate : Bluetooth V4.2(BT LE): 1.0Mbps  
Antenna Description : PCB Antenna, 1.7dBi(Max.)

## 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

## 1.3. External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

## 1.4. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

## 1.5. Test Conditions

<b>Temperature Range</b>	:	21-25°C
<b>Humidity Range</b>	:	45-85%
<b>Pressure Range</b>	:	86-106kPa

## 1.6. Frequency of Channels

### Bluetooth V4.2 (BT LE)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2402	21	2442
2	2404	---	---
3	2406	---	---
---	---	38	2476
---	---	39	2478
19	2438	40	2480
20	2440		

## 2. TEST METHODOLOGY

### 2.1. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of MIC Notice No.88 Appendix No. 43.

### 2.2. Measurement Uncertainty

Test Item		MU	Remark
Bandwidth	:	+/- 0.2 E-6	/
Antenna Power	:	+/-0.33dB	/
Frequency Tolerance	:	+/- 0.3 E-6	/
Conducted spurious emission	:	+/-0.13dB	/
DC Power	:	+/-1%	/

- (1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 2.3. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Test Software Version	FCC Assist 2.4		
Frequency	2402MHz	2440MHz	2480MHz
Bluetooth V4.2(DTS)	Default	Default	Default

### 2.4. Description of Test Modes

Tested mode, channel, and data rate information				
Mode	Preliminary Test Data Rate (Mbps)	Final Test Data Rate (Mbps) (see Note)	Channel	Frequency (MHz)
Bluetooth V4.2 (BT LE)	1	1	Low :CH1	2402
	1	1	Middle: CH20	2440
	1	1	High: CH40	2480

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 2.5. Test Voltage

## POWER SUPPLY VOLTAGE FLUCTUATION TEST

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 13.2V	DC 12V	DC 10.8V
Output To RF Module	DC 3.3V	DC 3.3V	DC 3.3V
Voltage Variation (%)	--	--	--

Note:

As declared by the manufacturer, the IC LM78L05 (PCB Bit Number: U8) and IC FP6131 (PCB Bit Number: U7) regulates the DC power to be DC 3.3V and supply to the RF module.

Voltage Variation (%)

= (Output high or Low Voltage - Output Normal Voltage) / Output Normal Voltage \* 100

**During the input supply voltage to the EUT from the external power source is varied by +/- 10%, if output voltage had been confirmed that the fluctuation of power supply to the RF circuit of EUT (excluding power source) is equal to or less than +/-1%. Exempt extremely high and low supply voltage condition test, EUT only operated in normal voltage to test all regulations.**

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in engineering mode.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (input command.) provided by application.

#### 3.3. Special Accessories

N/A.

#### 3.4. Block Diagram/Schematics

Please refer to the related document.

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 4. SUMMARY OF TEST RESULTS

MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19		
Clause	Description of Test (Transmitter Parameters)	Result
6	Antenna Power	PASS
6	Tolerances for Antenna Power	PASS
3	Frequency Tolerance	PASS
4	Transmission Rate	PASS
4	Occupied Frequency Bandwidth	PASS
4	Spread Bandwidth	PASS
13	Dwell Time	N/A
5	Spurious Emissions	PASS
10	Transmission Antenna Gain (EIRP Antenna Power)	N/A
11	Transmission Radiated Angle Width (3dB Beam width)	N/A
12	Interference prevention function	PASS
8	Carrier Sensing function	N/A
Receiver Parameters		
7	Secondary Radiated Emissions	PASS
<p>Note: (1) N/A is an abbreviation for Not Applicable. (2) N/T means this test item is not tested.</p>		

## 5. TEST RESULT

### 5.1. Antenna Power

#### 5.1.1. Standard Applicable

Type	Limit
DTS	10mW
OFDM OBW<26MHz, DS	10mW/MHz
OFDM OBW 26-40MHz	5mW/MHz
Tolerance	+20%,-80%


#### 5.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

#### 5.1.2. Test Procedures

- a. EUT have transmitted continuous maximum power
- b. Antenna Power Error is definition that actual measure antenna power tolerance between +20% to -80% power range that base on manufacturer declare the conducted power density.

#### 5.1.3. Test Setup

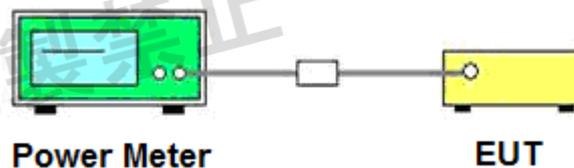

#### 5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.5. Test Result

**Please refer to the Appendix A.1 for BT LE RF Test Data.**

## 5.2. Frequency Tolerance

### 5.2.1. Standard Applicable

Tolerance of frequency shall be  $\pm 50 \times 10^{-6}$ .

### 5.2.2. Test Procedures

- a. Set EUT work in test mode as described in clause 2.4.
- b. Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 10 KHz.

Video BW: 10 KHz.


Span: 1MHz.

Detector: Peak.

Trace Mode: Max Hold.

- c. When the trace is complete, find the peak value of the power envelope and record.

### 5.2.3. Test Setup Layout

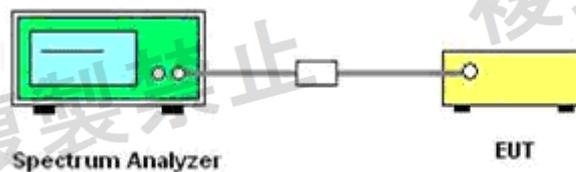

### 5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.2.5. Test Result

**Please refer to the Appendix A.2 for BT LE RF Test Data.**

### 5.3. Occupied Frequency Bandwidth

#### 5.3.1. Standard Applicable

Permissible value for occupied bandwidth using the FH system, a hybrid system combining DS and FH systems, or a hybrid system combining FH and OFDM systems shall be 83.5 MHz or less, while necessary bandwidth (minimum occupied bandwidth sufficient to ensure information transmission of required quality at a required transmission rate for the system used under specified conditions for a given emission type) using a system other than any of the above shall be 26 MHz or less.

#### 5.3.2. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

RBW/VBW= 30KHz/100KHz

Span: Wide enough to cover the complete power envelope of the signal of the EUT.


Sweep mode: Continuous sweeping.

Detector: Peak.

Trace Mode: Max Hold.

- When the trace is complete, measure the occupied bandwidth (99% bandwidth) with spectrum analyzer's bandwidth measure function.

#### 5.3.3. Test Setup Layout

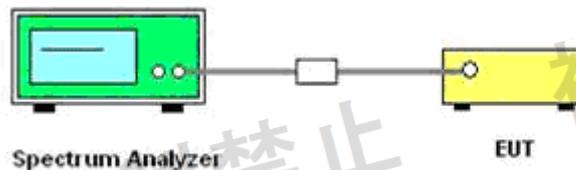

#### 5.3.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.3.5. Test Result of 99% Spectrum Bandwidth

**Please refer to the Appendix A.3 for BT LE RF Test Data.**

## 5.4. Spread Bandwidth

### 5.4.1. Standard Applicable

In spread spectrum systems, spread bandwidth (which refers to a frequency bandwidth with an upper limit and lower limit such that each of the mean powers radiated above the upper frequency limit and below the lower frequency limit is equal to 5 % of the total mean power radiated; this also applies hereafter) shall be 500 kHz or more.

### 5.4.2. Test Procedures

- a. Set EUT work in test mode as described in clause 2.4.
- b. Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

RBW/VBW= 30 KHz/100KHz


Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.

- c. When the trace is complete, measure the occupied bandwidth (90% bandwidth) with spectrum analyzer's bandwidth measure function.

### 5.4.3. Test Setup Layout

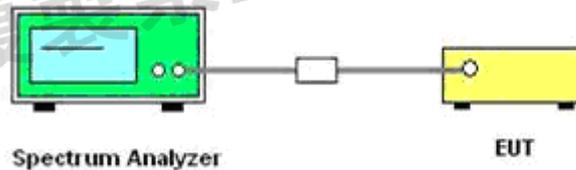

### 5.4.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.4.5. Test Result of 90% Occupied Bandwidth.

**Please refer to the Appendix A.4 for BT LE RF Test Data.**

## 5.5. Transmitter Spurious Emissions (conducted)

### 5.5.1. Standard Applicable

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency  $f$  other than frequency band used shall be as follows:

- a.  $2,387\text{MHz} \leq f \leq 2,400\text{MHz}$  and  $2,483.5\text{MHz} < f \leq 2,496.5\text{MHz}$  25  $\mu\text{W}$  or less
- b.  $2,387\text{MHz} > f$  and  $2,496.5\text{MHz} < f$  2.5  $\mu\text{W}$  or less

### 5.5.2. Test Procedures

- a. Set EUT work in test mode as described in clause 2.4.
- b. Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Below 1GHz: RBW/VBW= 100 KHz/ 100KHz


Above 1GHz: RBW/VBW= 1MHz / 1MHz.

Detector: Peak.

Trace Mode: Max Hold.

- c. All the emissions from 30MHz to 13GHz were measured and record.

### 5.5.3. Test Setup Layout

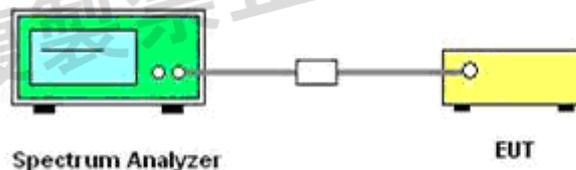

### 5.5.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.5.5. Test Results

**Please refer to the Appendix A.5 for BT LE RF Test Data.**

## 5.6. Carrier sensing function

### 5.6.1. Standard Applicable

Item	Limits
Carrier Sense	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79+Gr-20*\log(f)$ [dBm] (Gr: dBi; f: MHz) or 100mV/m)

### 5.6.2. Instruments Setting


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Span	0 MHz
Sweep	Continuous
Detector	Peak
Trigger mode	Video

### 5.6.3. Test Procedures

1. SSG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SSG and power level is (On  $22.79+Gr-20*\log(f)$ [dBm] (Gr: dBi; f: MHz). Then turn off the RF signal of SSG.
2. EUT have transmitted the maximum modulation signal and fixed channelize.
3. Setting of SA is following as: RB: 1MHz / VB: 1MHz / SPAN: 50MHz / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak.
4. SSG RF Signal On.
5. EUT shall be stop the transmitted any signal and SSG RF Signal Off. Then EUT will be continuous transmitted signal.

### 5.6.4. Test Setup Layout

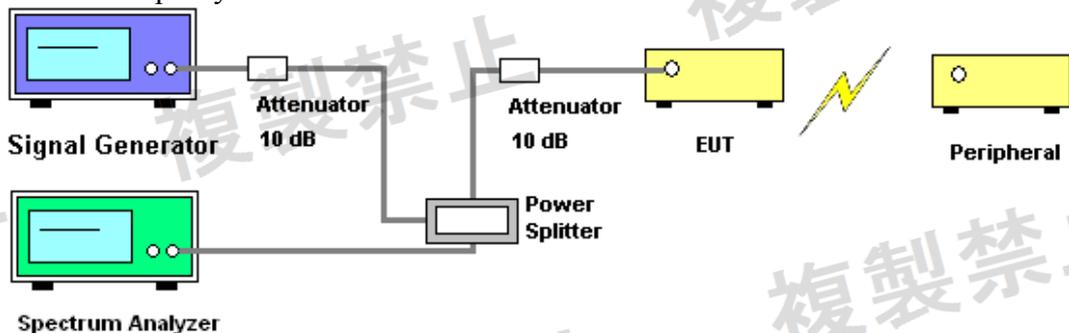

### 5.6.5. EUT Operation during Test

The EUT was programmed to be in normal transmitting mode.

### 5.6.6. Test Result

Not Applicable.

### 5.7. Interference prevention function

#### 5.7.1. Standard Applicable

Item	Limits
Identification code	≧ 48 bits


#### 5.7.2. Measuring ID Code Software

PC with NetTool	Setting
MAC IP List	MAC Scan

#### 5.7.3. Test Procedures

- In the case that the EUT has the function of automatically transmitting the identification code: a. Transmit the predetermined identification codes from EUT. b. Check the transmitted identification codes with the demodulator.
- In the case of receiving the identification code: a. Transmit the predetermined identification codes from the counterpart. b. Check if communication is normal. c. Transmit the other signals than predetermined ID codes from the counterpart. d. check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

#### 5.7.4. Test Setup Layout

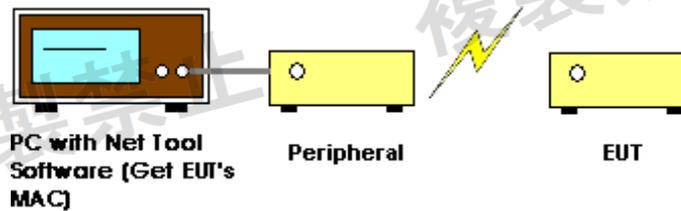

#### 5.7.5. EUT Operation during Test

The EUT was programmed to be in normal transmitting mode.

#### 5.7.6. Test Result

EUT ID	Performance index
60:ab:67:f0:90:fc	Good

## 5.8. Secondary Radiated Emissions

### 5.8.1. Standard Applicable

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

### 5.8.2. Test Procedures

- a. Set EUT work in test mode as described in clause 2.4.
- b. Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 100 KHz for frequency below 1GHz and

1MHz for frequency above 1GHz

Video BW: 100 KHz for frequency below 1GHz and


1MHz for frequency above 1GHz

Detector: Peak.

Trace Mode: Max Hold.

- c. All the emissions from 30MHz to 13GHz were measured and record.

### 5.8.3. Test Setup

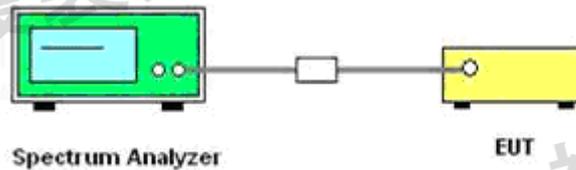

### 5.8.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.8.5. Test Results

**Please refer to the Appendix A.6 for BT LE RF Test Data.**

## 6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix B for Test Setup Photographs

## 7. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for External Photos of EUT

## 8. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix D for Internal Photos of EUT

## 9. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2020-06-22	2021-06-21
2	Power Sensor	R&S	NRV-Z81	100458	2020-06-22	2021-06-21
3	Power Sensor	R&S	NRV-Z32	10057	2020-06-22	2021-06-21
4	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2020-11-17	2021-11-16
5	DC Power Supply	Agilent	E3642A	N/A	2020-11-13	2021-11-12

-----THE END OF REPORT-----