



**Article 2 Clause 1 Item 19**  
**CERTIFICATION TEST REPORT**

*For*

**MODEL NUMBER: RM510**

**REPORT NUMBER: 4789980659-6**

**ISSUE DATE: June 29, 2021**

*Prepared for*

**SZ DJI TECHNOLOGY CO.,LTD.**  
**14th floor,West Wing,Skyworth Semiconductor Design Building NO.18 Gaoxin**  
**South 4th Ave,Nanshan District,Shenzhen,China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**  
**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-**  
**Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**  
**Fax: +86 769 33244054**  
**Website: [www.ul.com](http://www.ul.com)**



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	6/29/2021	Initial Issue	

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. DESCRIPTION OF EUT .....	7
5.2. RATED ANTENNA OUTPUT POWER.....	7
5.3. CHANNEL LIST .....	7
5.4. TEST CHANNEL CONFIGURATION.....	9
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	9
5.6. DESCRIPTION OF AVAILABLE ANTENNAS .....	9
5.7. DESCRIPTION OF TEST SETUP.....	10
<b>6. SETUP PHOTO .....</b>	<b>11</b>
<b>7. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>11</b>
<b>8. TEST RESULTS.....</b>	<b>12</b>
8.1. Appendix A: Frequency_Error.....	12
8.1.1. Test Result .....	12
8.1.2. Test Graphs .....	13
8.2. Appendix B: Antenna Power .....	15
8.2.1. Test Result .....	15
8.3. Appendix C: Occupied Bandwidth.....	16
8.3.1. Test Result .....	16
8.3.2. Test Graphs.....	17
8.4. Appendix D: Spread Bandwidth .....	19
8.4.1. Test Result .....	19
8.4.2. Test Graphs.....	20
8.5. Appendix E: Spurious Emission of TX.....	22
8.5.1. Test Result .....	22
8.5.2. Test Graphs.....	23
8.6. Appendix F: Spurious Emission of RX.....	29
8.6.1. Test Result .....	29
8.6.2. Test Graphs.....	30
8.7. Appendix G: Duty Cycle.....	33
8.7.1. Test Result .....	33
8.7.2. Test Graphs.....	33



8.8. INTERFERENCE PREVENTION FUNCTION.....34



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: SZ DJI TECHNOLOGY CO.,LTD.  
Address: 14th floor,West Wing,Skyworth Semiconductor Design Building  
NO.18 Gaoxin South 4th Ave,Nanshan District,Shenzhen,China

### EUT Information

Model: RM510  
Serial No.: XXXXXXXXXX  
Mac Address: 0x62024B32  
Software Version: 01.00.00.0  
Sample Received Date: June 15, 2021  
Sample Status: Normal  
Date of Tested: June 24, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
Article 2 Clause 1 Item 19	PASS

Prepared By:

Kebo Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with Notice 88 of Ordinance Concerning Technical Regulations Conformity Certification of Specified Radio Equipment

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services (Guangzhou) Co., Ltd., Song Shan Lake Branch and all revisions are duly noted

Test Item	Date	Temp (5-35°C)	Humidity (45-85%RH)	Test Room
Frequency Error	24-June-21	25.1°C	53%	Shielding Room D
Occupied Bandwidth	24-June-21	25.1°C	53%	Shielding Room D
Unwanted Emission Strength	24-June-21	25.1°C	53%	Shielding Room D
Output Power/ E.I.R.P	24-June-21	25.1°C	53%	Shielding Room D
Secondary Radiated Emission Strength	24-June-21	25.1°C	53%	Shielding Room D
Burst Length / Duty	24-June-21	25.1°C	53%	Shielding Room D
Half Power Beam Angle	/	/	/	/
Interference Prevention Function	24-June-21	25.1°C	53%	Shielding Room D

## 4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Duty Cycle	$\pm 0.028\%$
Occupied Bandwidth	$\pm 0.0196\%$
Maximum Conducted Output Power	$\pm 0.686$ dB
Conducted Unwanted Emissions	$\pm 0.746$ dB (9 kHz ~ 1 GHz)
	$\pm 1.328$ dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Model	RM510
Technology	SRD
Transmit Frequency Range	2411.5 MHz ~ 2471.5 MHz
Mode	SRD 2.4GHz _20MHz
Modulation	OFDM
Ratings	DC 7.2 V

### 5.2. RATED ANTENNA OUTPUT POWER

Test Mode	Frequency (MHz)	Channel Number	Type of radio wave	Antenna Power (W/MHz)
SRD 2.4GHz _20MHz	2411.5~ 2471.5	1-61[61]	DID, X7W	0.000431

### 5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2411.5	17	2427.5	33	2443.5	49	2459.5
2	2412.5	18	2428.5	34	2444.5	50	2460.5
3	2413.5	19	2429.5	35	2445.5	51	2461.5
4	2414.5	20	2430.5	36	2446.5	52	2462.5
5	2415.5	21	2431.5	37	2447.5	53	2463.5



6	2416.5	22	2432.5	38	2448.5	54	2464.5
7	2417.5	23	2433.5	39	2449.5	55	2465.5
8	2418.5	24	2434.5	40	2450.5	56	2466.5
9	2419.5	25	2435.5	41	2451.5	57	2467.5
10	2420.5	26	2436.5	42	2452.5	58	2468.5
11	2421.5	27	2437.5	43	2453.5	59	2469.5
12	2422.5	28	2438.5	44	2454.5	60	2470.5
13	2423.5	29	2439.5	45	2455.5	61	2471.5
14	2424.5	30	2440.5	46	2456.5	/	/
15	2425.5	31	2441.5	47	2457.5	/	/
16	2426.5	32	2442.5	48	2458.5	/	/



#### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
SRD 2.4GHz _20MHz	CH 1(Low Channel), CH 31(MID Channel), CH 61(High Channel)	2411.5 MHz, 2441.5 MHz, 2471.5 MHz

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5 MHz Band				
Test Software		DjiSRDConsole		
Test Mode	Transmit Antenna Number	Test Software Setting Value		
		CH 1	CH 31	CH 61
SRD 2.4GHz _20MHz	0	1	0	70
SRD 2.4GHz _20MHz	1	1	0	70

#### 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
0	2411.5~ 2471.5	Dipole	3
1	2411.5~ 2471.5	Dipole	3

Test Mode	Transmit and Receive Mode	Description
SRD 2.4GHz _20MHz	☒2TX, 4RX	Antenna 0 and Antenna 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

2. The EUT support SISO mode and MIMO mode, for SISO mode and MIMO mode, the power settings of all antenna ports are the same, the antenna gain of all antenna ports are the same, so only the worst case of MIMO mode (ANT 0 and ANT 1) are selected for the final test, and only the worst data of ANT 1 are recorded in the report.

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	ThinkPad	X230i	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1m	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/


### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

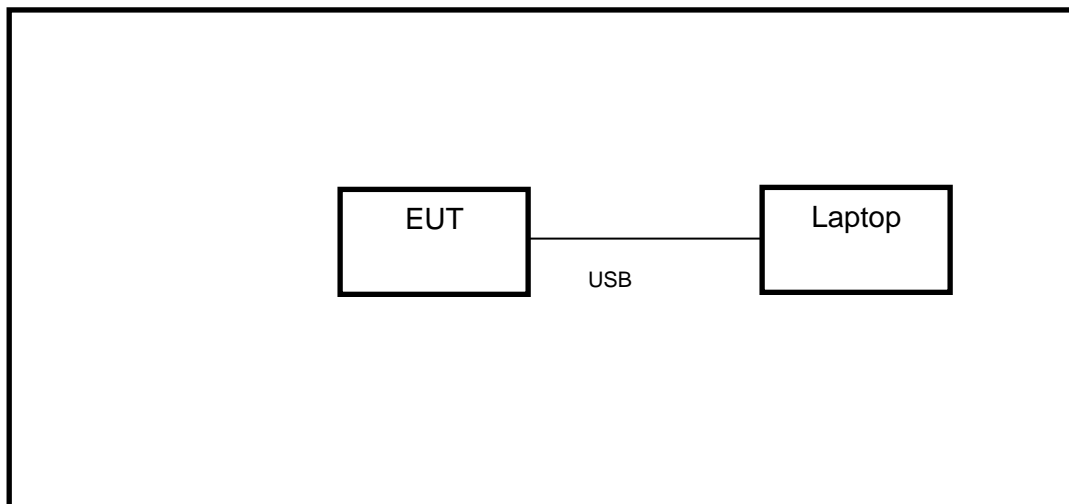

## 6. SETUP PHOTO

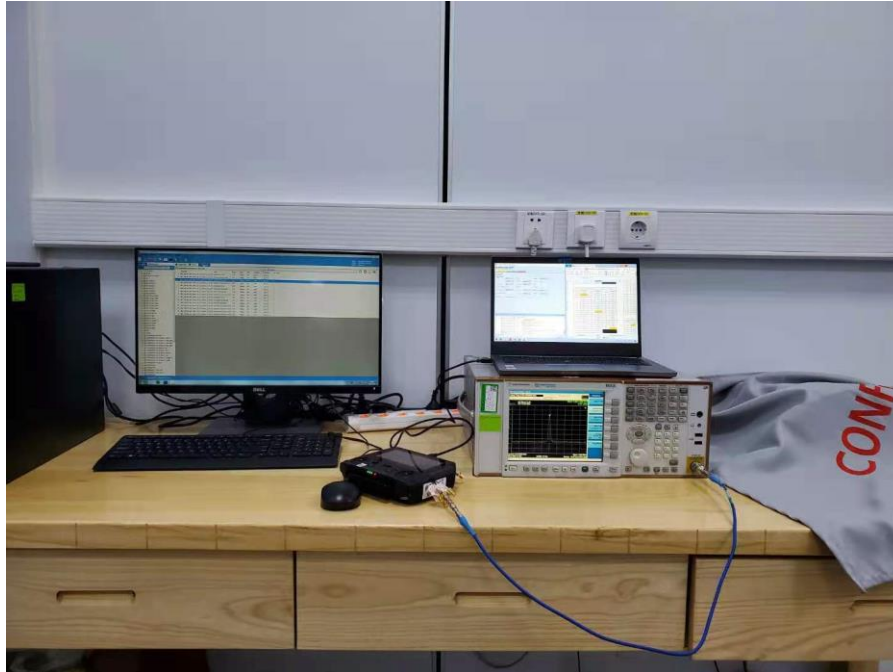

## 7. MEASURING INSTRUMENT AND SOFTWARE USED

Tonsend RF Test System						
Use	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
	Wideband Radio Communication Tester	R&S	CMW500	155523	Nov.20,2020	Nov.19,2021
X	PXA Signal Analyzer	Keysight	N9020A	MY49100060	Nov.20,2020	Nov.19,2021
	MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Nov.20,2020	Nov.19,2021
	MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Nov.20,2020	Nov.19,2021
	DC power supply	Keysight	E3642A	MY55159130	Nov.24,2020	Nov.23,2021
	Power Sensor	Keysight	U2021XA	MY58100022	Nov.20,2020	Nov.19,2021
Software						
	Description	Manufacturer	Name		Version	
X	Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.88.0339	

Note: "X" used equipment.



## 8. TEST RESULTS


### 8.1. Appendix A: Frequency\_Error


#### 8.1.1. Test Result

Test Condition	Test Mode	Antenna	Channel	Result[ppm]	Limit[ppm]	Verdict
NTNV	SRD 2.4GHz _20MHz	Ant1	2411.5	-0.41468	±50	PASS
			2441.5	-0.40958	±50	PASS
			2471.5	-0.40461	±50	PASS



## 8.1.2. Test Graphs

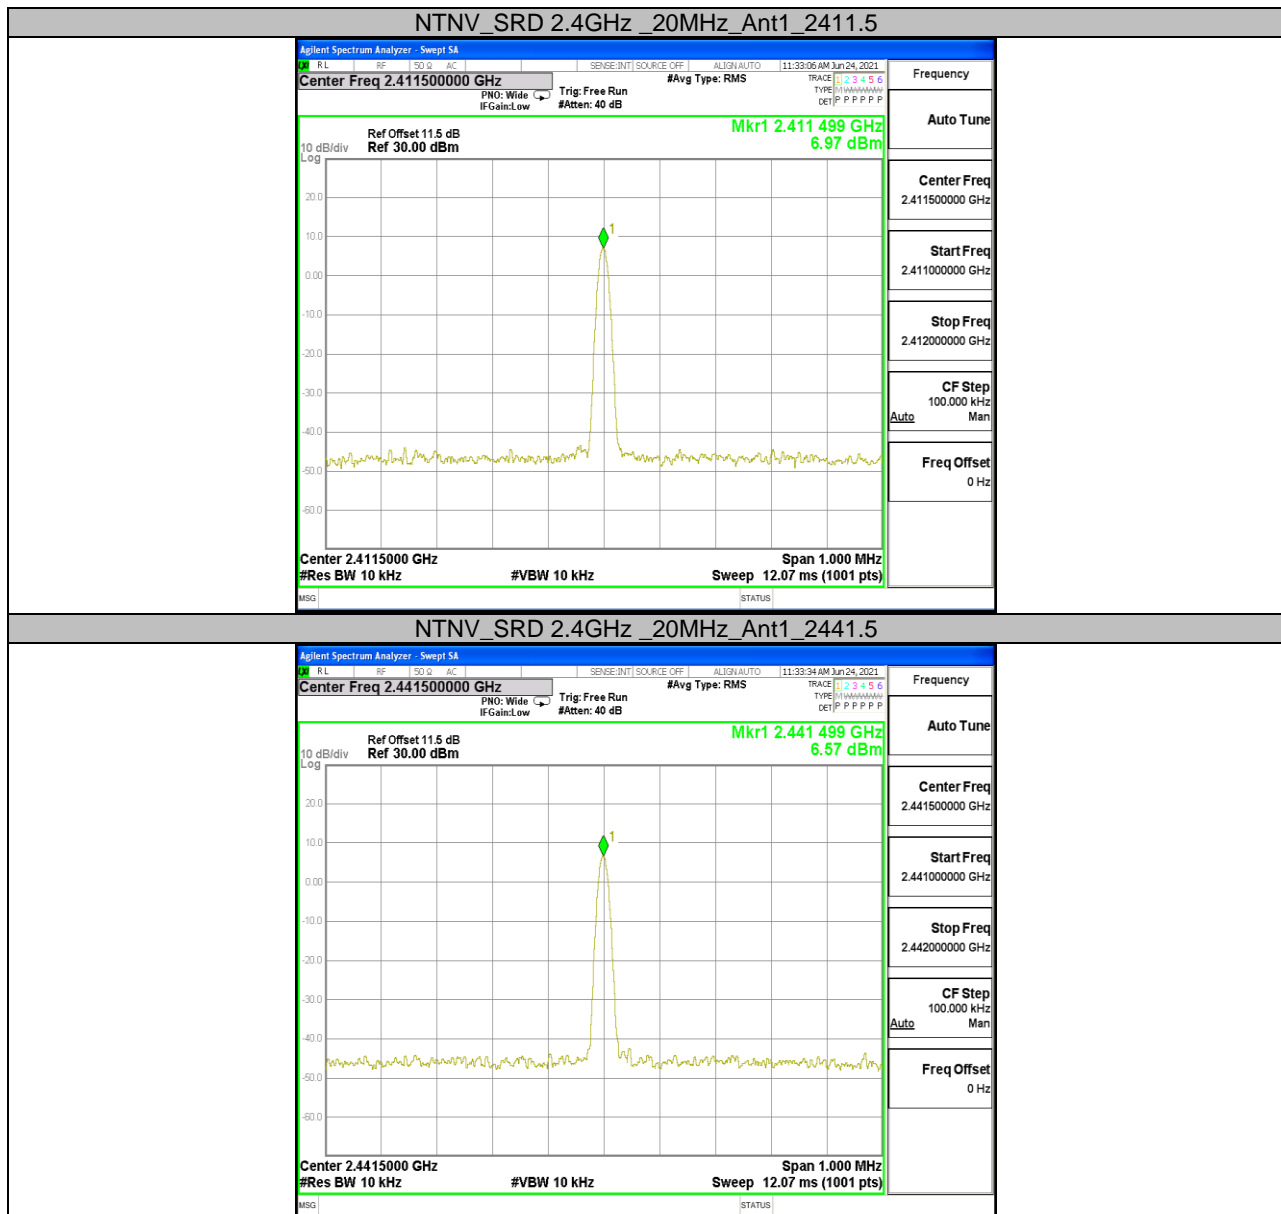

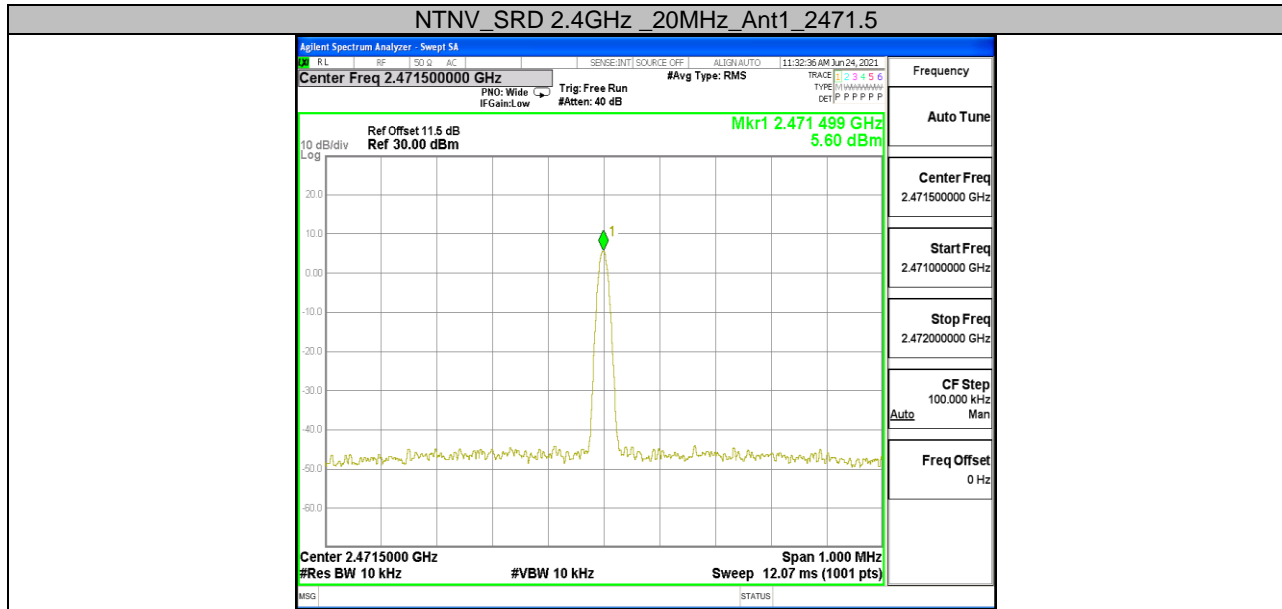



## 8.2. Appendix B: Antenna Power

### 8.2.1. Test Result

#### [ DATA ]

Test Condition	Test Mode	Antenna	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Spreading Bandwidth [MHz]	Result [W/MHz]	Burst Rate	Output Power (A) [W/MHz]	Antenna Gain [dBi]	E.I.R.P. (A) [W/MHz]
NTNV	SRD 2.4GHz _20MHz	0	2411.5	-8.46	1.50	10.00	15.859	0.002014	1.23	0.000156	3.00	0.000312
			2441.5	-9.00	1.50	10.00	15.747	0.001779	1.23	0.000139	3.00	0.000277
			2471.5	-8.65	1.50	10.00	15.806	0.001928	1.23	0.000150	3.00	0.000299
NTNV	SRD 2.4GHz _20MHz	1	2411.5	-7.59	1.50	10.00	15.859	0.002458	1.23	0.000191	3.00	0.000380
			2441.5	-8.19	1.50	10.00	15.747	0.002142	1.23	0.000167	3.00	0.000334
			2471.5	-8.08	1.50	10.00	15.806	0.002197	1.23	0.000171	3.00	0.000341

Note:

Output Power (A) =  $10^{\left( \left( \text{Reading [dBm]} + \text{Cable Loss} + \text{Atten. Loss} \right) / 10 \right) / 1000} \times \text{Burst Rate} / \text{Spreading Bandwidth}$ E.I.R.P. (A) = Output Power (A) \*  $10^{\left( \text{Antenna Gain [dBi]} / 10 \right)}$ .

#### [Total Power / Result and Limit]

Test Condition	Freq. [MHz]	Output Power				E.I.R.P.		
		Result (B) [W/MHz]	Tolerance Result [%]	Limit [W/MHz]	Tolerance Limit [%]	Result (B) [W/MHz]	Result [dBm/MHz]	Limit [dBm/MHz]
NTNV	2411.5	0.000347	-12.6	0.010000	+20 ~ -80	0.000692	-1.60	12.14
	2441.5	0.000306	-22.9	0.010000	+20 ~ -80	0.000611	-2.14	12.14
	2471.5	0.000321	-19.1	0.010000	+20 ~ -80	0.000640	-1.93	12.14

Note:

Tolerance = Output Power Result (B) / Declared Output Power \* 100 - 100.

Output Power Result (B) : Sum of all "Output Power (A)" at same Freq.

E.I.R.P. Result (B): Sum of all "E.I.R.P. (A)" at same Freq.

#### [Declared Output Power]

Average of Output Power Result (B)	0.000325	[W/MHz]	Average of E.I.R.P. Result(B)	0.000648	[W/MHz]
Declared Output Power	0.000431	[W/MHz]	E.I.R.P. for Declared Output Power	-0.65	[dBm/MHz]
+20	0.000518	[W/MHz]			
Middle (Declared Output Power -30%)	0.000302	[W/MHz]			
-80	0.000086	[W/MHz]			

Note:

E.I.R.P. for Declared Output Power =  $10 * \log(\text{Declared Output Power} * 1000) + \text{Antenna Gain}$



### 8.3. Appendix C: Occupied Bandwidth

#### 8.3.1. Test Result


Test Condition	Test Mode	Antenna	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	SRD 2.4GHz _20MHz	Ant1	2411.5	17.983	≤26	PASS
			2441.5	17.895	≤26	PASS
			2471.5	17.883	≤26	PASS





### 8.3.2. Test Graphs



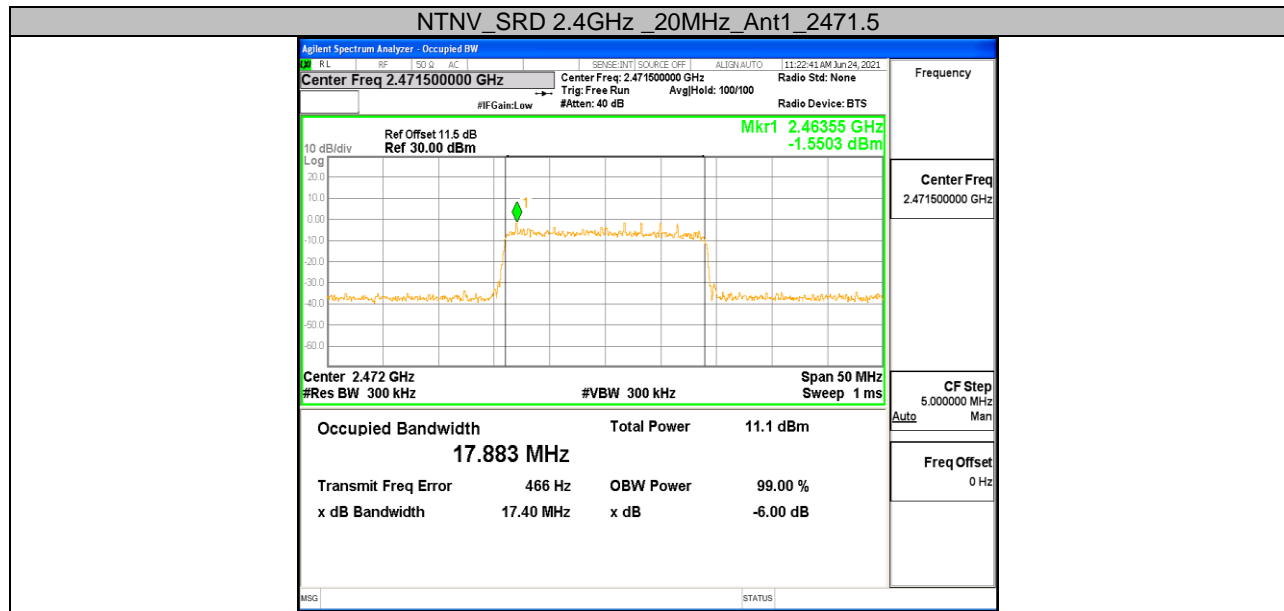



## 8.4. Appendix D: Spread Bandwidth


### 8.4.1. Test Result

Test Condition	Test Mode	Antenna	Channel	Result [MHz]	Limit [MHz]	Verdict
NTNV	SRD 2.4GHz _20MHz	Ant1	2411.5	15.859	≥0.5	PASS
			2441.5	15.747	≥0.5	PASS
			2471.5	15.806	≥0.5	PASS



## 8.4.2. Test Graphs



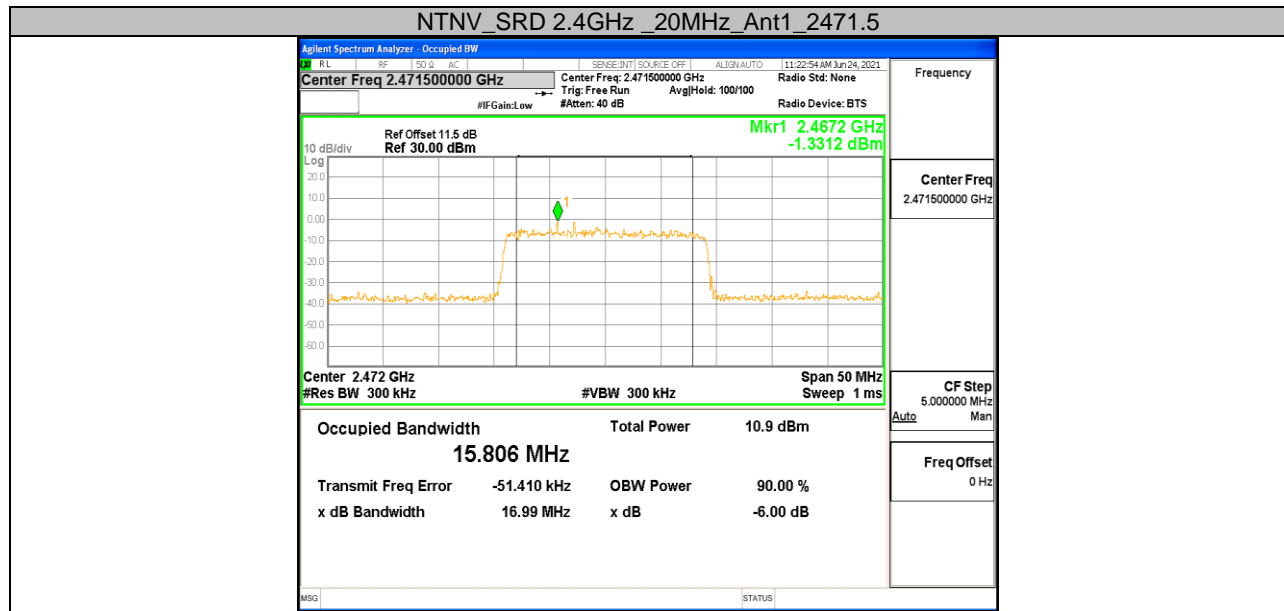


## 8.5. Appendix E: Spurious Emission of TX


### 8.5.1. Test Result

Test Condition	Test Mode	Antenna	Channel	Freq.Range [MHz]	Reading [dBm]	N(Ant) 10Log(N) [dB]	Result [dBm]	Limit [dBm]	Verdict
NTNV	SRD 2.4GHz _20MHz	Ant1	2411.5	30~2387	-54.054	3.01	-51.044	≤-26	PASS
				2387~2400	-43.466	3.01	-40.456	≤-16	PASS
				2483.5~2496.5	-54.929	3.01	-51.919	≤-16	PASS
				2496.5~13000	-54.301	3.01	-51.291	≤-26	PASS
			2441.5	30~2387	-56.335	3.01	-53.325	≤-26	PASS
				2387~2400	-53.834	3.01	-50.824	≤-16	PASS
				2483.5~2496.5	-53.881	3.01	-50.871	≤-16	PASS
				2496.5~13000	-54.964	3.01	-51.954	≤-26	PASS
			2471.5	30~2387	-55.705	3.01	-52.695	≤-26	PASS
				2387~2400	-53.885	3.01	-50.875	≤-16	PASS
				2483.5~2496.5	-41.43	3.01	-38.42	≤-16	PASS
				2496.5~13000	-54.252	3.01	-51.242	≤-26	PASS





## 8.5.2. Test Graphs

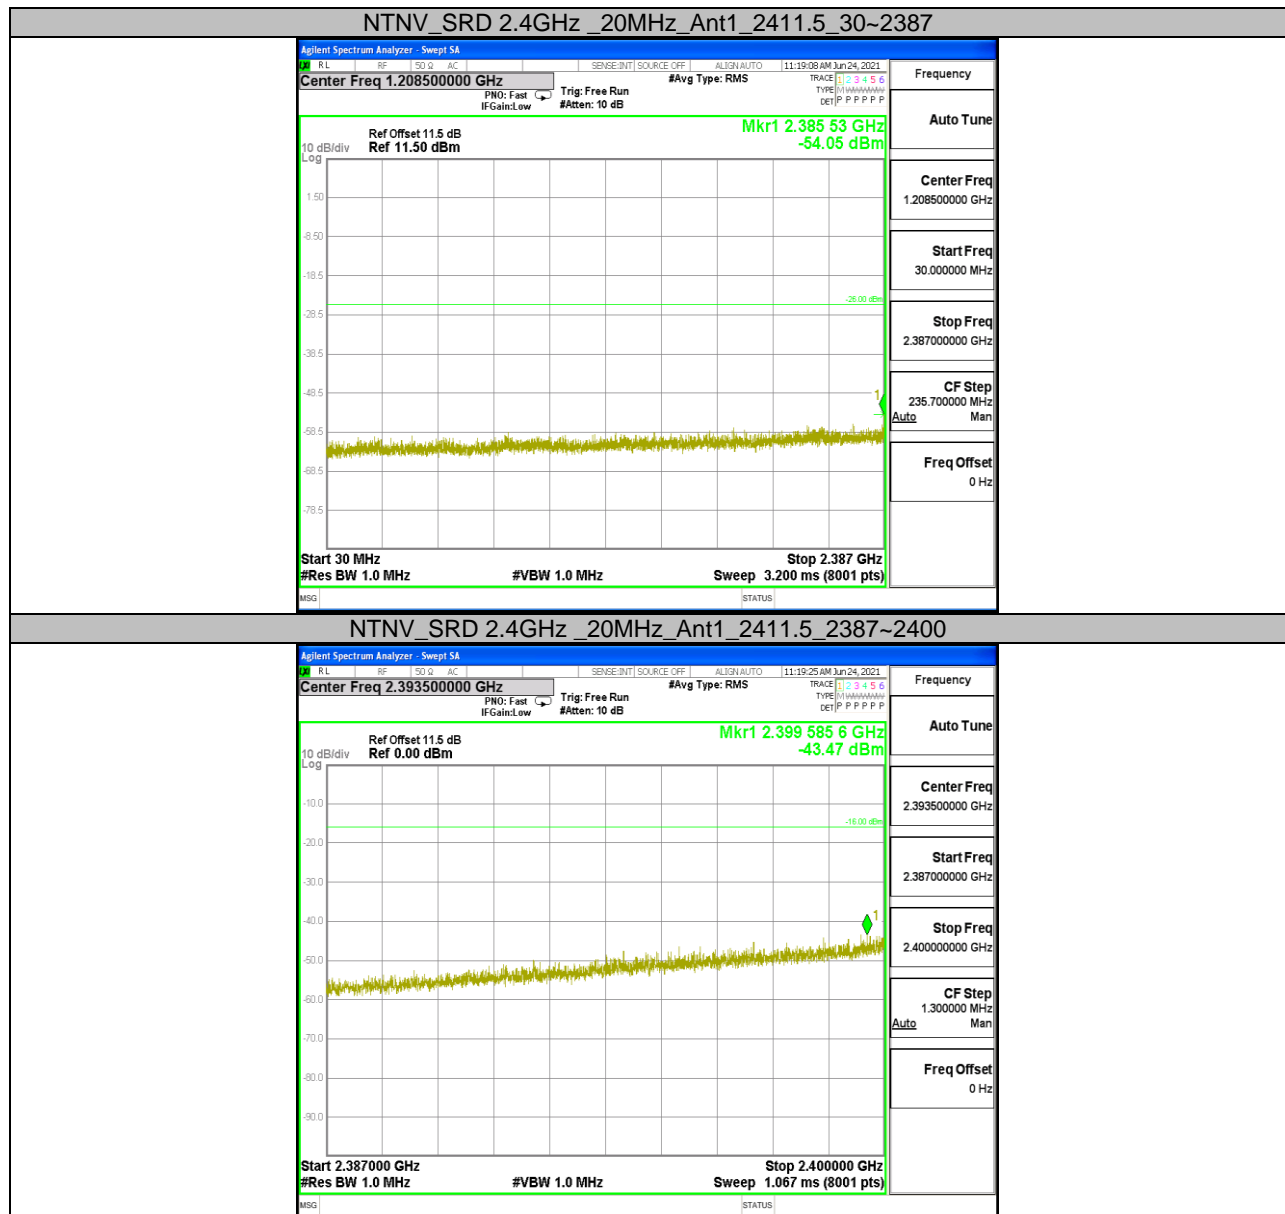


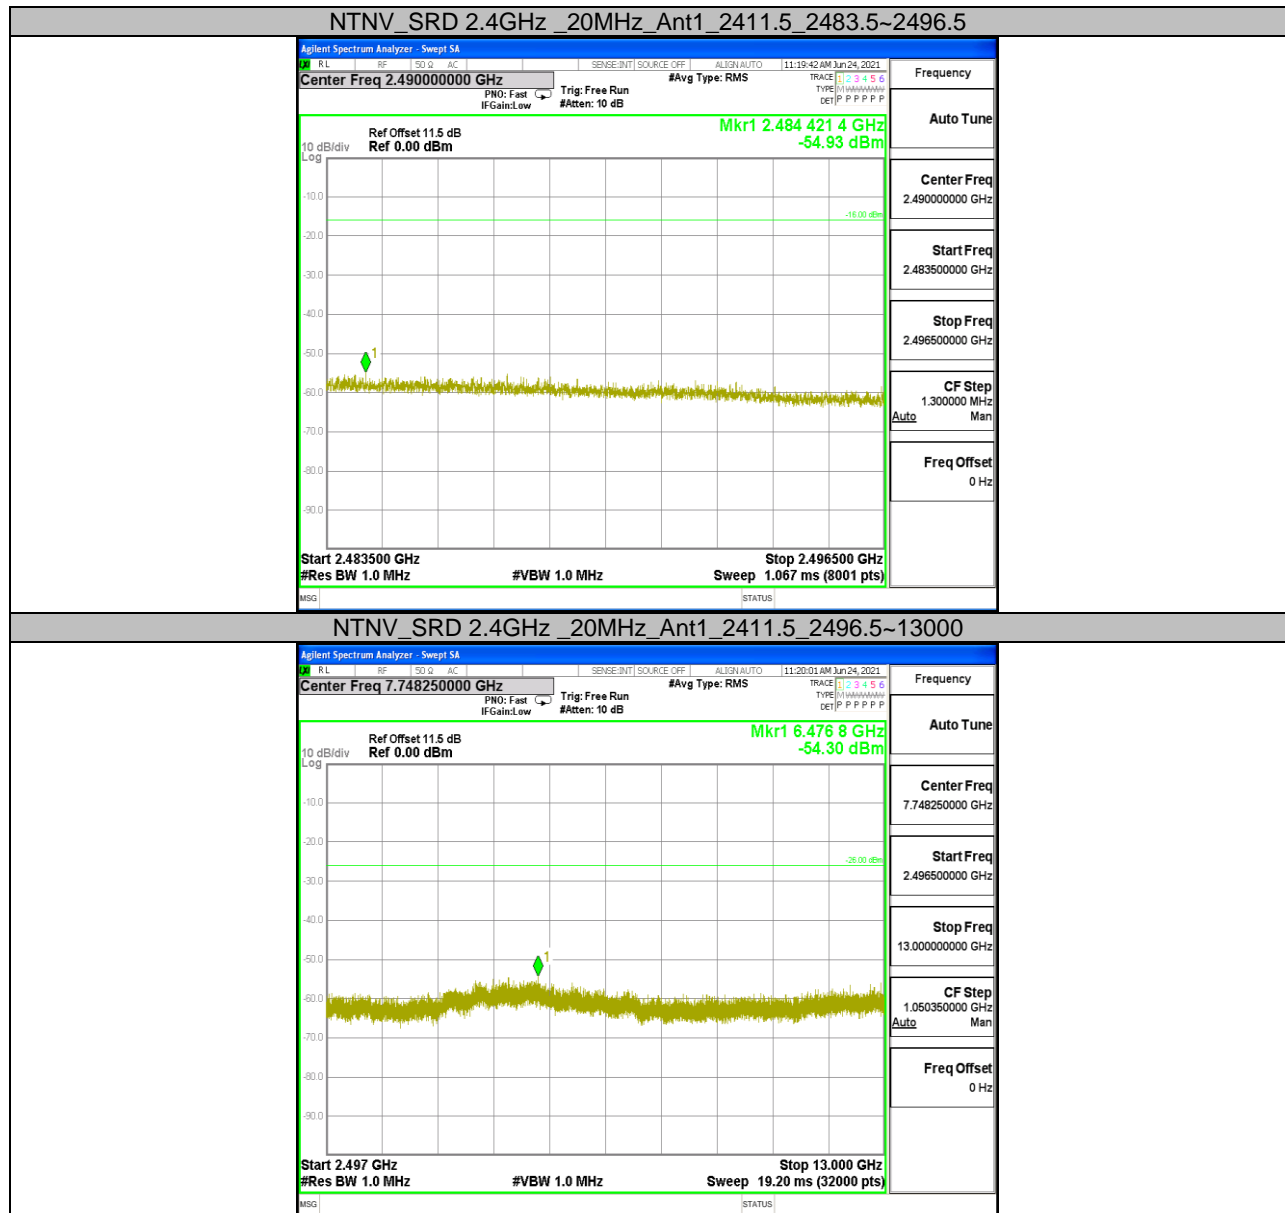




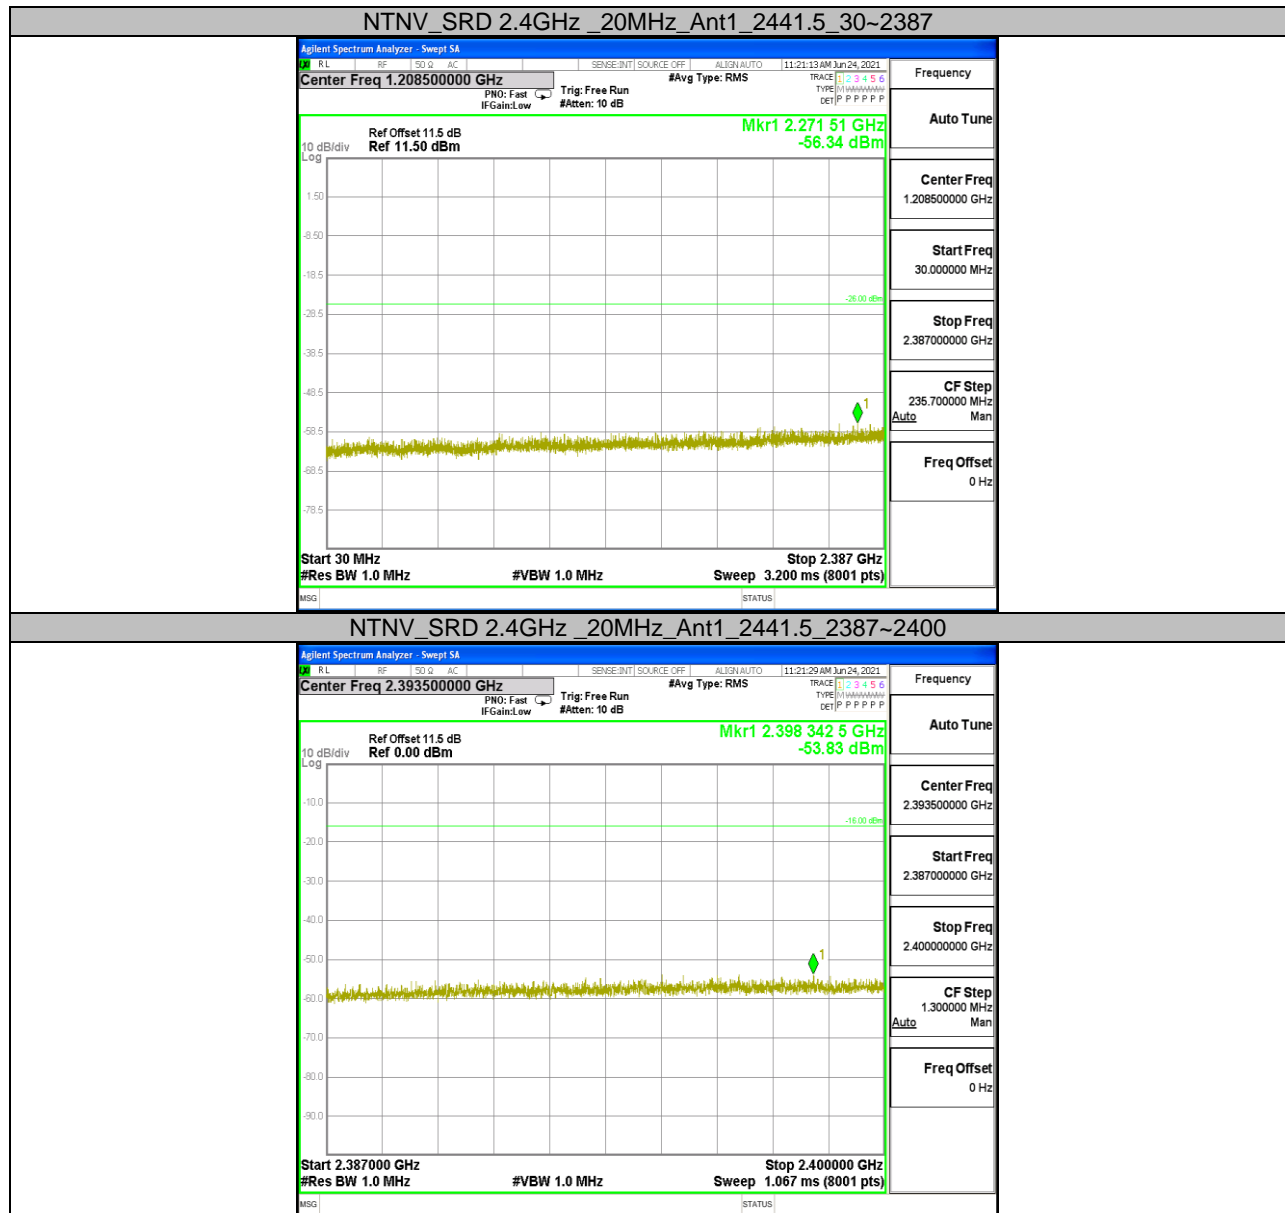

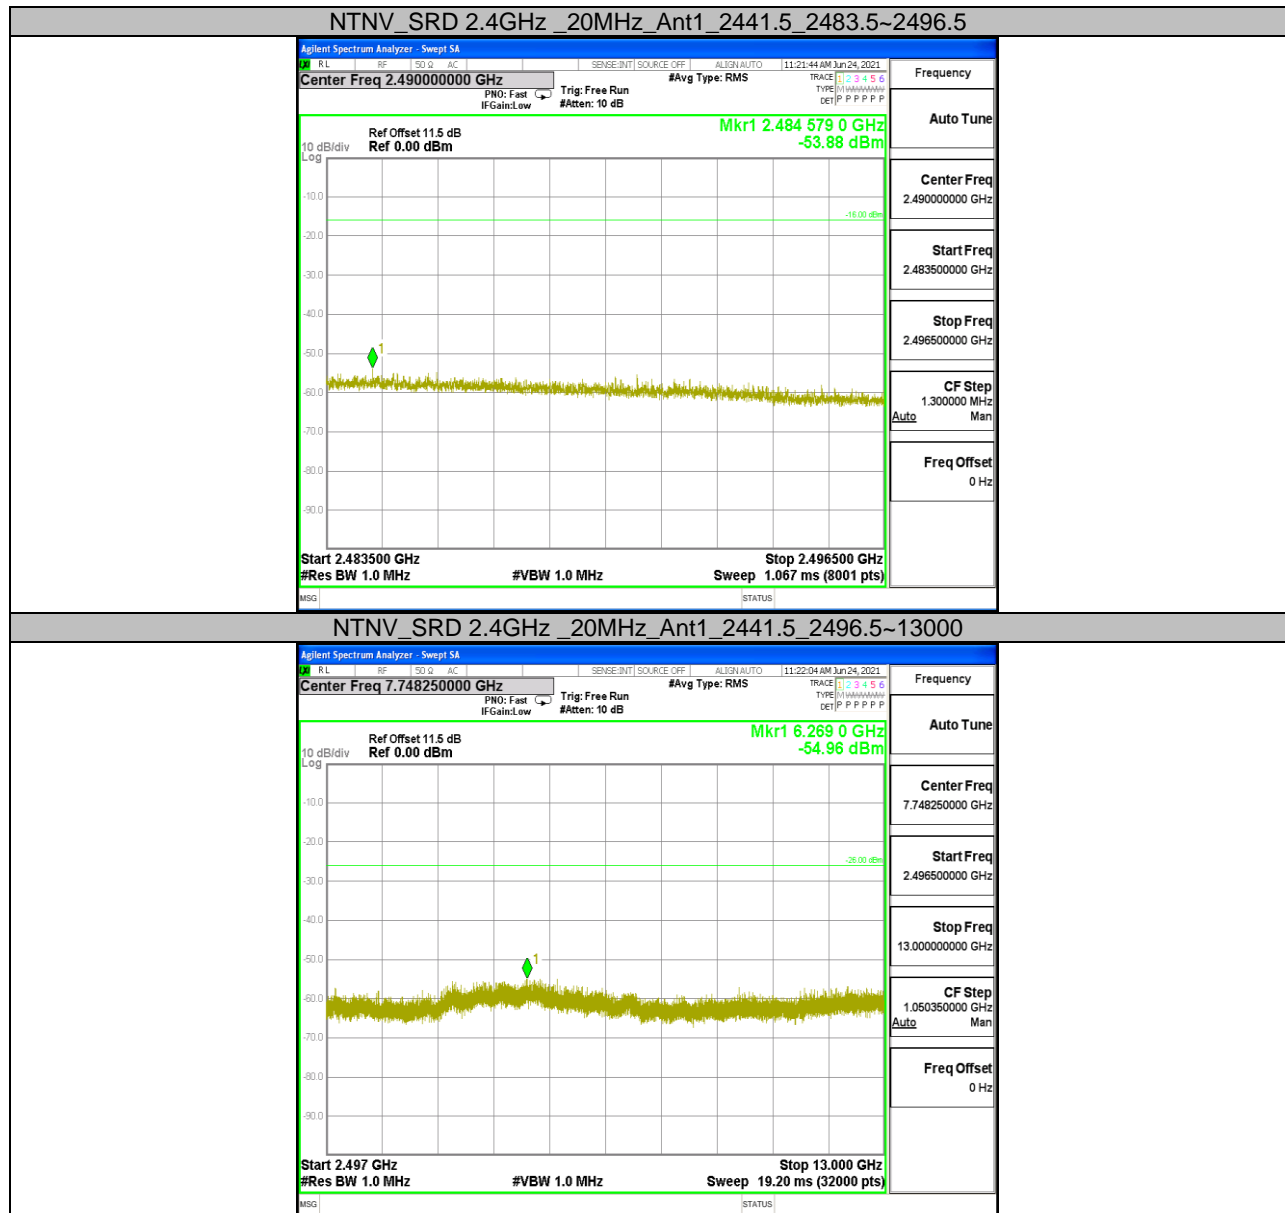

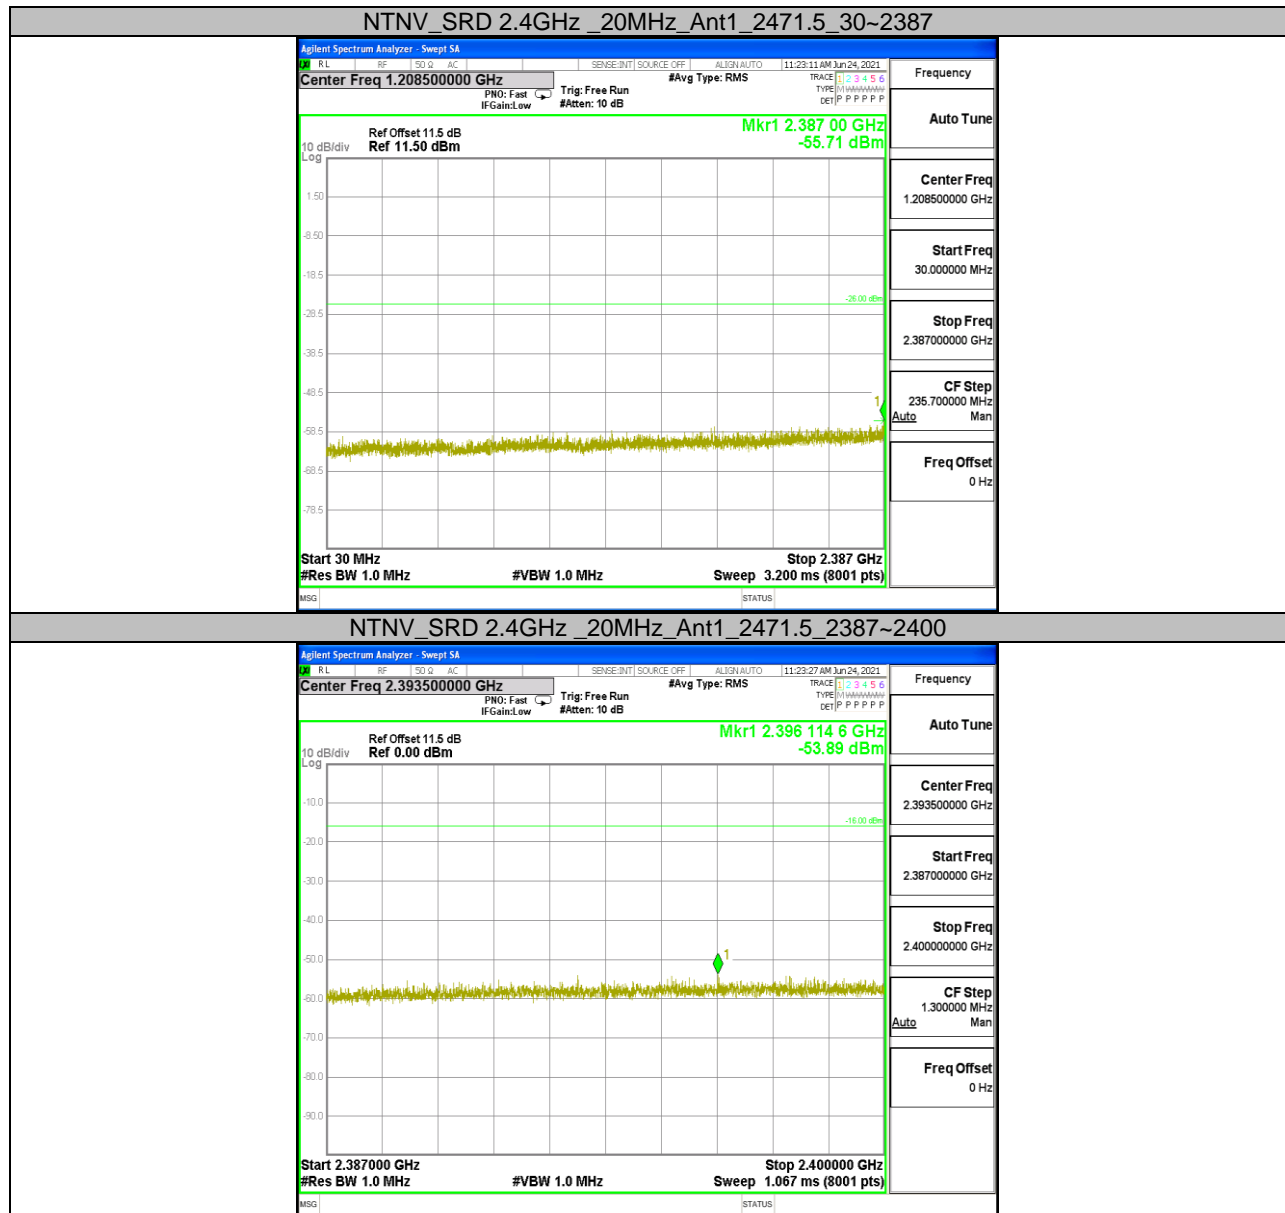

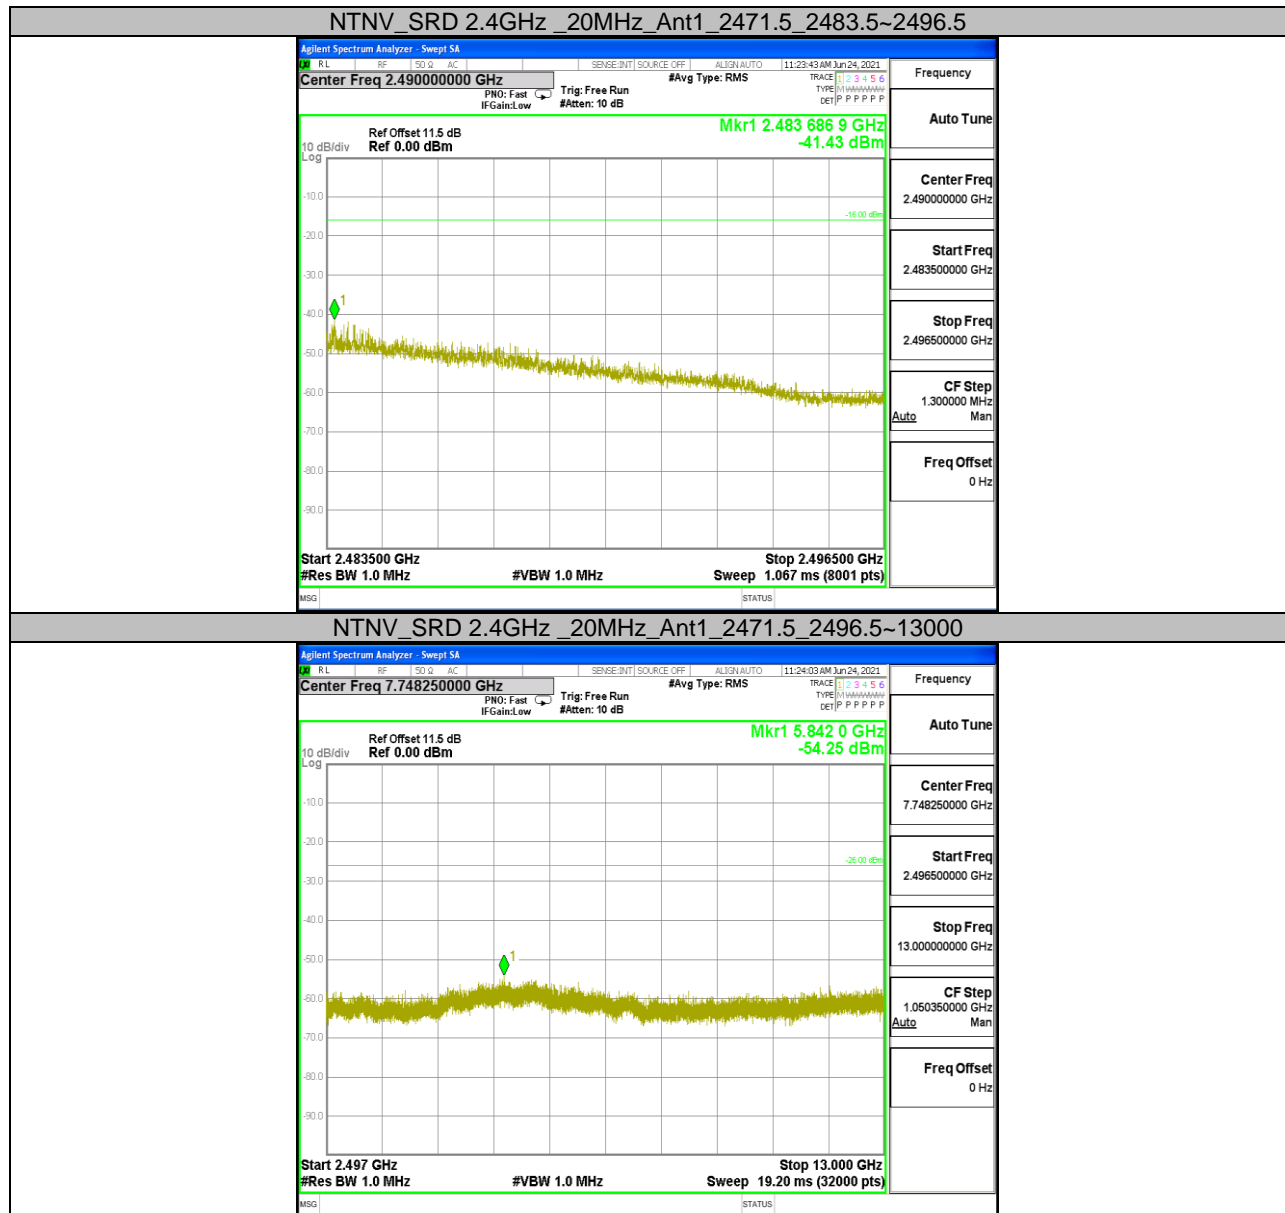




## 8.6. Appendix F: Spurious Emission of RX


### 8.6.1. Test Result


Test Condition	Test Mode	Antenna	Channel	Freq.Range [MHz]	Reading [dBm]	N(Ant) 10Log(N) [dB]	Result [dBm]	Limit [dBm]	Verdict
NTNV	SRD 2.4GHz _20MHz	Ant1	2411.5	30~1000	-89.019	3.01	-86.009	≤-54	PASS
				1000~13000	-75.804	3.01	-72.794	≤-47	PASS
			2441.5	30~1000	-89.451	3.01	-86.441	≤-54	PASS
				1000~13000	-75.263	3.01	-72.253	≤-47	PASS
			2471.5	30~1000	-89.25	3.01	-86.24	≤-54	PASS
				1000~13000	-75.616	3.01	-72.606	≤-47	PASS



## 8.6.2. Test Graphs

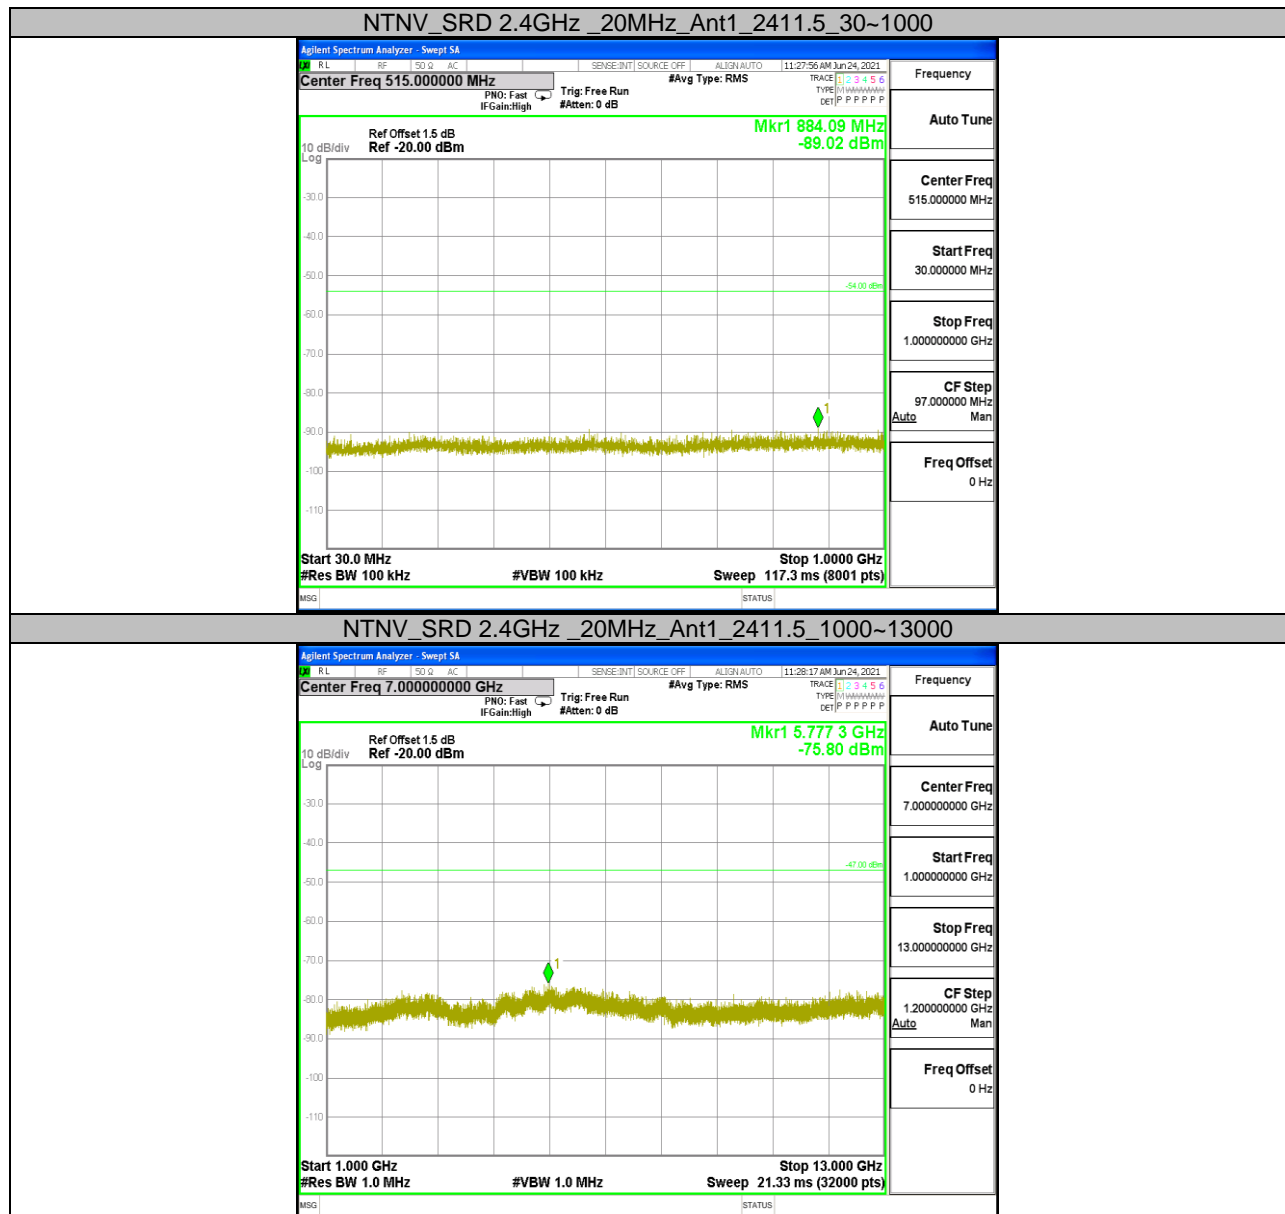

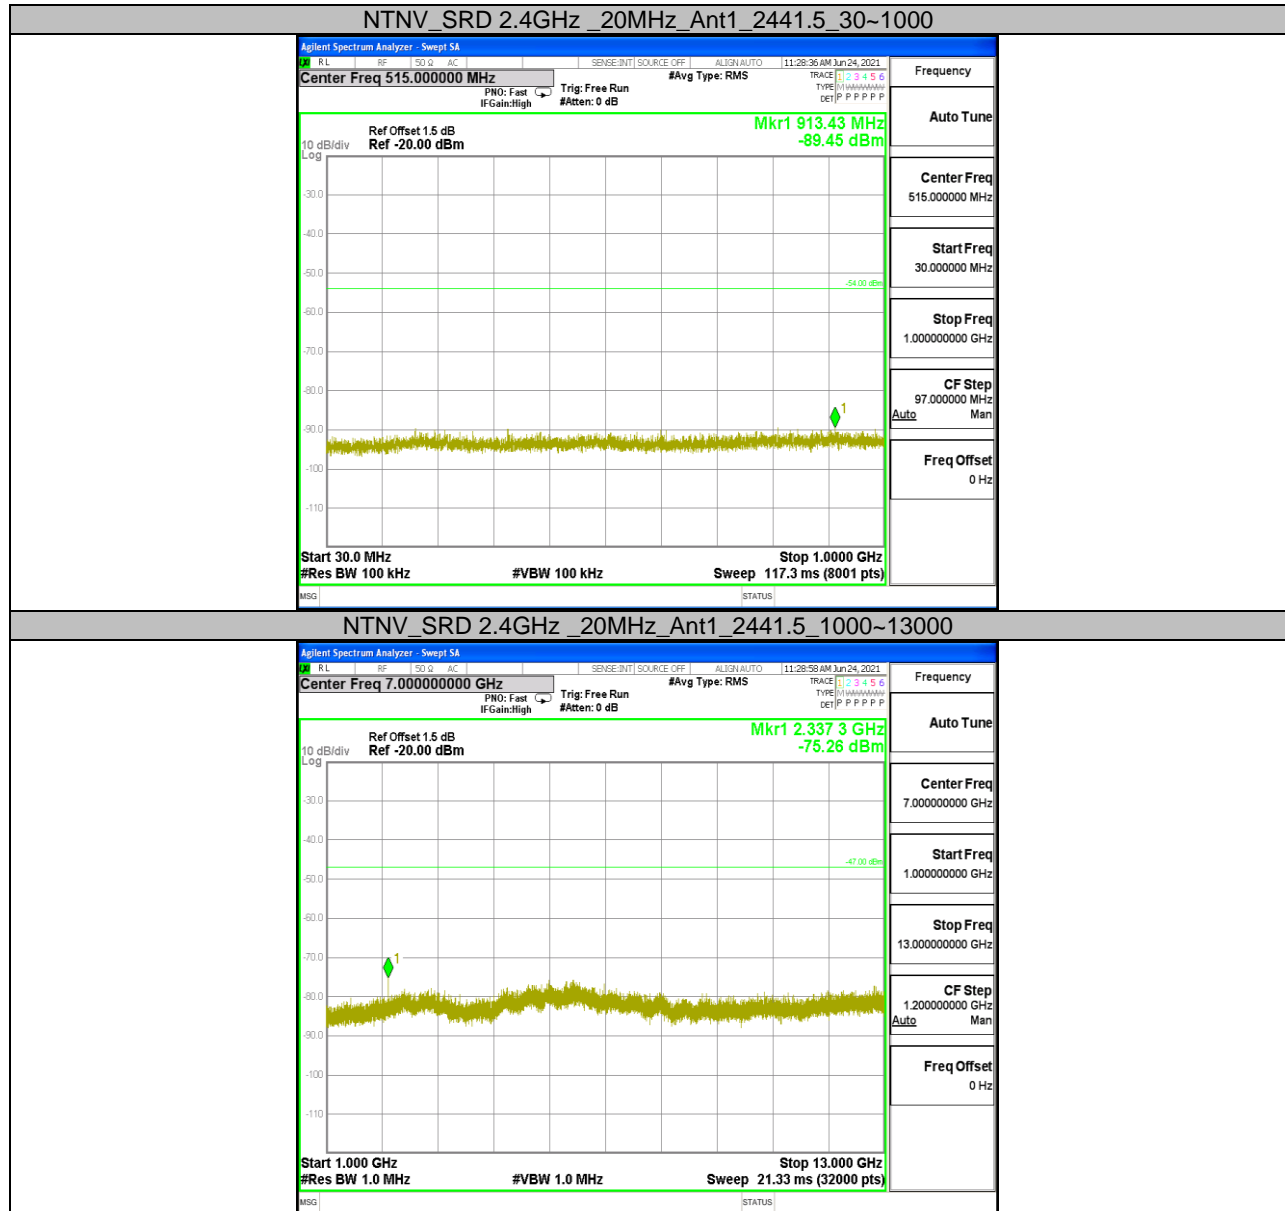

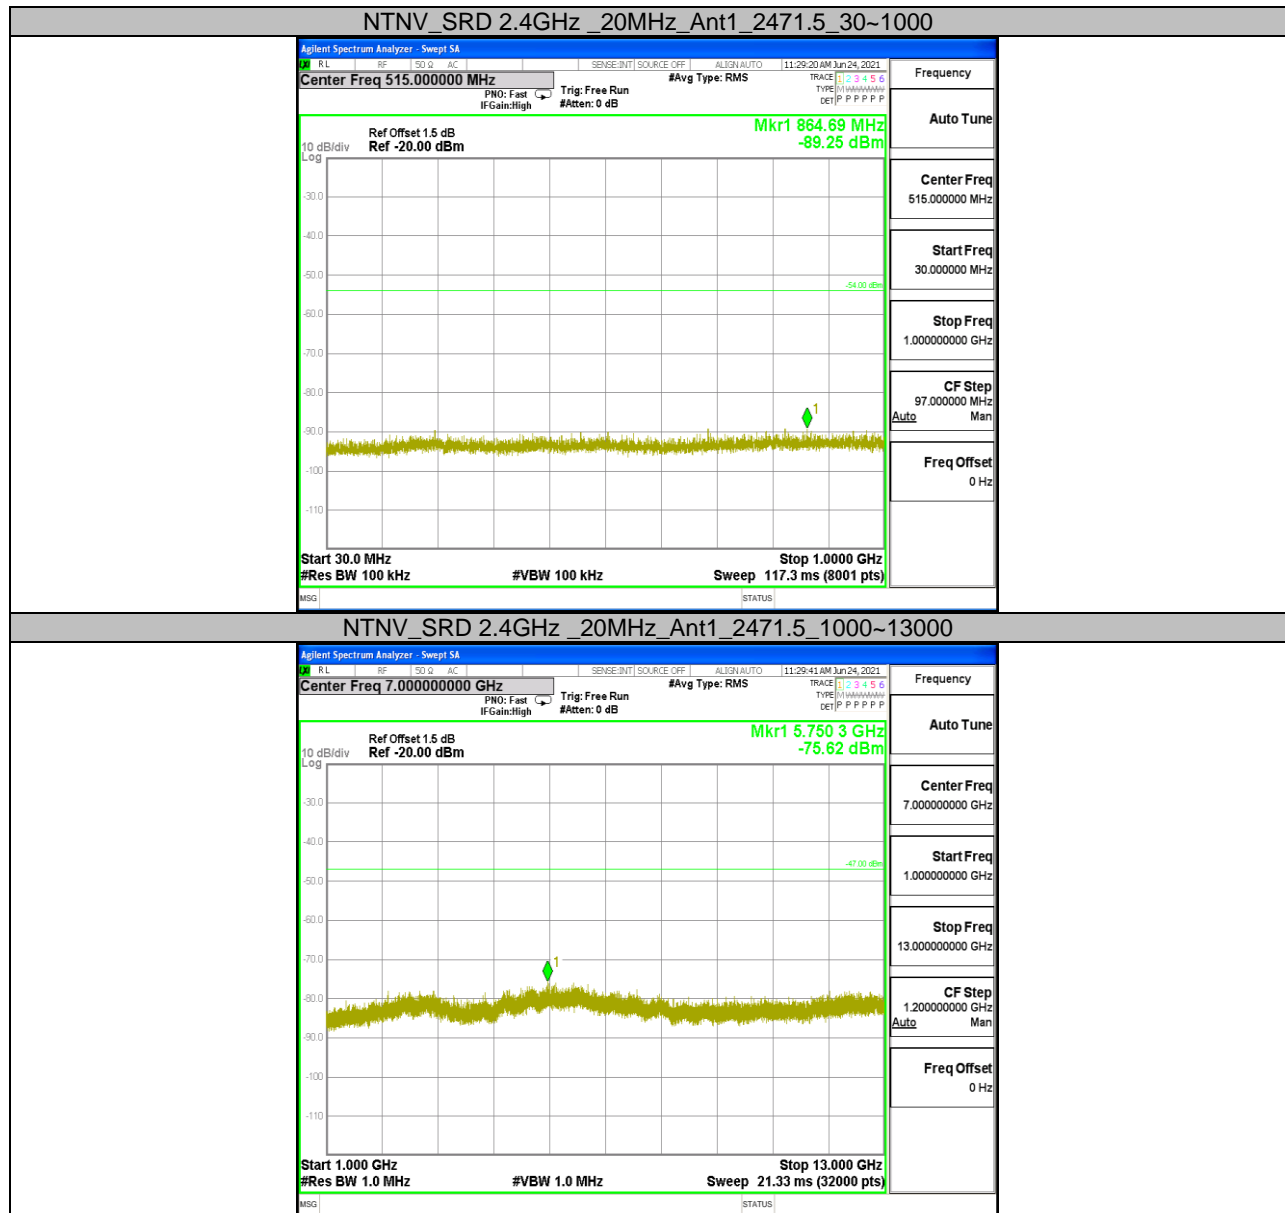





## 8.7. Appendix G: Duty Cycle

### 8.7.1. Test Result

Test Condition	Test Mode	Antenna	Channel	On Time [ms]	Period [ms]	Result (Duty) (%)	Result (Burst Rate)
NTNV	SRD 2.4GHz _20MHz	Ant1	2441.5	8.16	10.02	81.44	1.23


Note:

Result(Duty) = On Time / Period \* 100

On Time = 1△2+4△3

Result(Burst Rate) = Period / On Time

### 8.7.2. Test Graphs

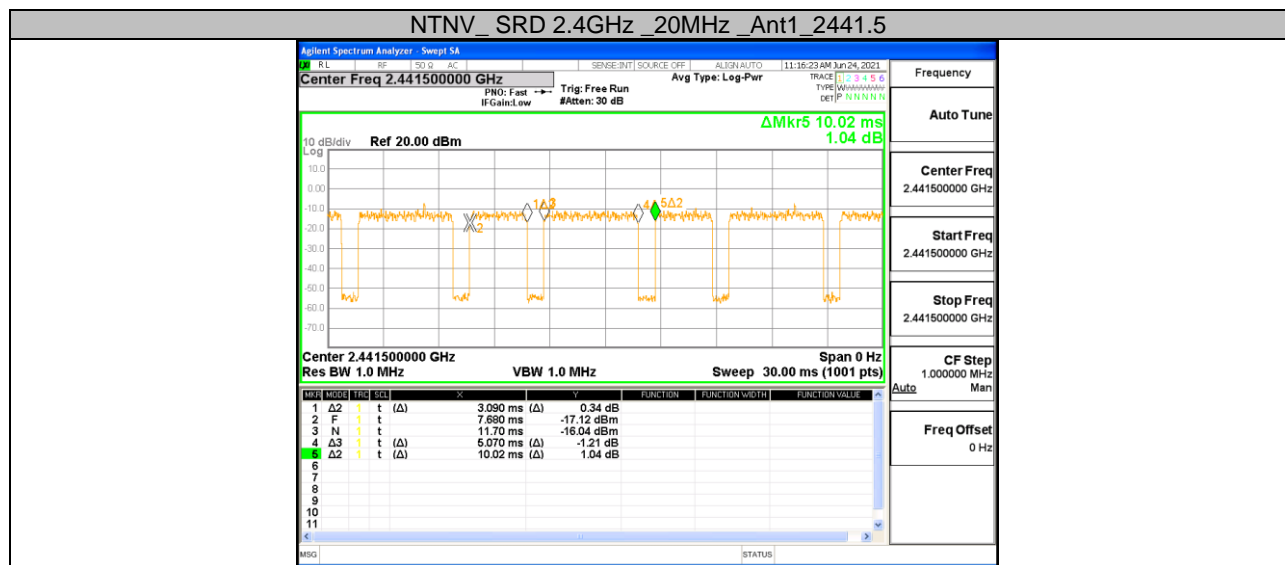



## 8.8. INTERFERENCE PREVENTION FUNCTION

### Test Procedure

In the case that the EUT has the function of automatically transmitting the identification code:

1. Transmit the predetermined identification codes from EUT
2. Check the transmitted identification codes with the demodulator.

In the case of receiving the identification codes:

1. Transmit the predetermined identification codes from the counterpart.
2. Check if communication is normal.
3. Transmit the signal other than predetermined ID codes from the counterpart.
4. Check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

### Measurement Result

Environmental Conditions

Temperature:	25.8°C
Relative Humidity:	59%
ATM Pressure:	100.3kPa

**Test result: Pass**